CATALOG

Motor protection and Control

AX09 ... AX150 contactors
Manual Motor Starters
Overload relays



- Speed-up your projects
- Easy to install
- Continuous operation.

AX contactor range
Control made simple

Motor rated operational powers and currents

The currents given below concern standard three-phase four-pole cage motors (1500 r.p.m. at 50 Hz 1800 r.p.m. at 60 Hz). These values are given for guidance and may vary according to the motor manufacturer and depending on the number of poles.

IEC	Motor nominal current: standardized values in grey colour (according to IEC 60947-4-1 Annex G)									
Motor power	220 V	230 V	240 V	380 V	400 V	415 V	440 V	500 V	660 V	690 V
kW	A	A	A	A	A	A	A	A	A	A
0.06	0.37	0.35	0.34	0.21	0.2	0.19	0.18	0.16	0.13	0.12
0.09	0.54	0.52	0.50	0.32	0.3	0.29	0.26	0.24	0.18	0.17
0.12	0.73	0.7	0.67	0.46	0.44	0.42	0.39	0.32	0.24	0.23
0.18	1	1	1	0.63	0.6	0.58	0.53	0.48	0.37	0.35
0.25	1.6	1.5	1.4	0.9	0.85	0.82	0.74	0.68	0.51	0.49
0.37	2.0	1.9	1.8	1.2	1.1	1.1	1	0.88	0.67	0.64
0.55	2.7	2.6	2.5	1.6	1.5	1.4	1.3	1.2	0.91	0.87
0.75	3.5	3.3	3.2	2.0	1.9	1.8	1.7	1.5	1.15	1.1
1.1	4.9	4.7	4.5	2.8	2.7	2.6	2.4	2.2	1.7	1.6
1.5	6.6	6.3	6	3.8	3.6	3.5	3.2	2.9	2.2	2.1
2.2	8.9	8.5	8.1	5.2	4.9	4.7	4.3	3.9	2.9	2.8
3	11.8	11.3	10.8	6.8	6.5	6.3	5.7	5.2	4	3.8
4	15.7	15	14.4	8.9	8.5	8.2	7.4	6.8	5.1	4.9
5.5	20.9	20	19.2	12.1	11.5	11.1	10.1	9.2	7	6.7
7.5	28.2	27	25.9	16.3	15.5	14.9	13.6	12.4	9.3	8.9
11	39.7	38	36.4	23.2	22	21.2	19.3	17.6	13.4	12.8
15	53.3	51	48.9	30.5	29	28	25.4	23	17.8	17
18.5	63.8	61	58.5	36.8	35	33.7	30.7	28	22	21
22	75.3	72	69	43.2	41	39.5	35.9	33	25.1	24
30	100	96	92	57.9	55	53	48.2	44	33.5	32
37	120	115	110	69	66	64	58	53	40.8	39
45	146	140	134	84	80	77	70	64	49.1	47
55	177	169	162	102	97	93	85	78	59.6	57
75	240	230	220	139	132	127	116	106	81	77
90	291	278	266	168	160	154	140	128	97	93
110	355	340	326	205	195	188	171	156	118	113
132	418	400	383	242	230	222	202	184	140	134
160	509	487	467	295	280	270	245	224	169	162
200	637	609	584	368	350	337	307	280	212	203
250	782	748	717	453	430	414	377	344	261	250
315	983	940	901	568	540	520	473	432	327	313
355	1109	1061	1017	642	610	588	535	488	370	354
400	1255	1200	1150	726	690	665	605	552	418	400
500	1545	1478	1416	895	850	819	745	680	515	493
560	1727	1652	1583	1000	950	916	832	760	576	551
630	1928	1844	1767	1116	1060	1022	929	848	643	615
710	2164	2070	1984	1253	1190	1147	1043	952	721	690
800	2446	2340	2243	1417	1346	1297	1179	1076	815	780
900	2760	2640	2530	1598	1518	1463	1330	1214	920	880
1000	3042	2910	2789	1761	1673	1613	1466	1339	1014	970

1SBC100161S0201

Motor protection and control

Contactors, manual motor starters and overload relays

OVERVIEW
P. 3

MANUAL MOTOR STARTERS
P. 11

AX CONTACTORS AND NX CONTACTOR RELAYS
P. 27

OVERLOAD RELAYS
P. 87

GENERAL TECHNICAL DATA
P. 101

INDEX
P. 108

1SBC100188C0204 - Edition January 2023

AX contactors

The simplest way to get the control and performance you need



The AX contactor range offers exceptional reliability and performance in a brilliant, space-saving design. Use it for motor starting applications up to 150 A / 75 kW 400 V AC-3.

Speed-up your projects

Simpler selection process

Speed up your projects with ABB's simpler order codes, faster identification, easier connection, and a complete and flexible range of accessories. Compliance process is faster too as AX contactors use environmentally friendly materials that comply with energy label.

Easy to install

Faster fitting by design

ABB's smart design saves time with every detail. AX contactors are smaller and easier to handle. All terminals are delivered in open position so wiring is faster.

ABB's broad range provides the best configuration for the job. Single or multiple pole blocks are no problem. Front or side mounted auxiliary contact blocks are available as well.

Continuous operation

Proven, secure, trusted

Trust a proven solution from a brand with 100 years of experience in contactors design and manufacture. ABB's AX range makes starting solutions that are more reliable – with type 2 coordination between contactors and short-circuit protection devices guaranteed.

ABB's mechanically linked contacts and mirror contact functions make control circuits safe and reliable.

1SBC100162S0201- Rev. B

Save time when building motor starting solution with AX contactors

Complete range compatible with ABB low voltage solutions



Tested component combinations
Using ABB's coordination tables gives users a choice of fully tested assemblies and product combinations. It's quicker and easier to build DOL starters, reversing starters or star delta starters using ABB's range of AX contactors, manual motor starters, molded case breakers, fuses and overload relays.

Create smart starters
AX contactors look more professional and, together with connection kits, they provide a better finish than cables or bus bars.

Save time
ABB starters come with connection kits to make assembly simpler and faster. The kits save time on cable preparation and eliminate fitment and wiring error risks.

1SBC100207S0201 - revA

AX contactors
Features and benefits

Every detail designed for you
Smart packaging design makes it simpler to identify the product you need – the product type, coil voltage, order code and bar code are all clearly displayed. The same goes when the product is unboxed. A quick glance at the front tells you what product, contactor type and coil voltage you have. Terminal markings are also plainly visible. The rated values and main approvals are ready to read on the side.

Certified, trusted contactors
ABB's AX contactors are designed in compliance with IEC 60947-4-1 and GB 14048-4 requirements. These trusted safety products have CB certification, CE marking as well as UL, CCC and CCS approval.





Easier to connect
ABB designed its AX contactors so that all screw-heads are accessible from the front. One Pozidriv #2 screwdriver fits every contactor terminal and the complete accessory range. All main and auxiliary terminals can take one or two cables and contactors up to AX150 have three coil terminals for connection from the top or the bottom. Right out of the box, all terminals are ready in the open position for wiring.

Environmentally sound
The design and production of ABB's AX contactor range follows ISO 14000 processes. The raw materials are free of red phosphorous, cadmium, mercury, brominated substances (PBB, PBPE) and other pollutants. AX contactors and main accessories also comply with the European directive ROHS 2011/65/EU incl. 2015/863/EU.
The same goes for the packaging design. The box is fully recyclable and clearly marked to aid correct disposal.





ISO 14001

AX contactors
Features and benefits

Auxiliaries made simple, secure and flexible
Common interfaces that are clip-on and self-locking make mounting ABB contactors simpler. Its AX contactor range uses the same front-mounted auxiliary contact blocks up to AX150 and the same side-mounted auxiliary contact blocks up to AX80. To maximize flexibility, users can front-mount any single- or four-pole auxiliary contact block. Two-pole auxiliary contact block can be side-mounted.

Protect control circuits and save space
ABB's AX range makes surge suppressors easy to snap on and connect. Designing contactor coils to them fit within their overall dimensions without additional space requirements. The smart design and proven technologies provide safe protection for circuits against over-voltages when the contactor opens.

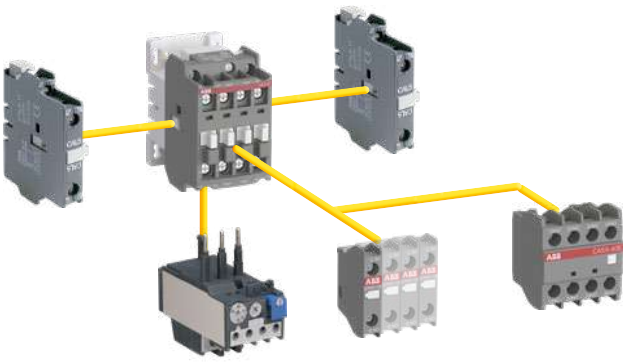



Complete range of multi-function overload relays
ABB's complete range of thermal overload relays provides class 10 protection and key functions including:
- Motor protection against overload and phase failure
- Automatic and manual reset both included
- Test and stop functions

ABB's thermal overload relays are suitable for three-phase or single-phase motor applications with temperature compensation between -25 °C and +55 °C.

Safe and reliable control circuits
A white contact carrier ensures the contactor state is visible at all times, even with accessories mounted.
Built-in and add-on auxiliary contacts provide reliable low signal contacts for 12 V 3 mA. Failure rates are less than 10-6 according to IEC 60947-5-1.
Mechanically linked functions are available with 4-pole blocks CA5X. Mirror contacts are available with built-in NC contacts for AX09 ... AX40 and side-mounted blocks CAL5-11X and 4-pole blocks CA5X for AX09 ... AX80.

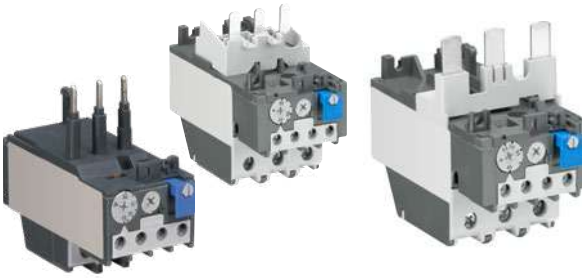



1SBC100207S0201 - revA

3-pole contactors for motor control and power switching





IEC	AC-3 Rated operational power	θ ≤ 55 °C, 400 V	kW	4	5.5	7.5	11	15	18.5
AC Control supply			Type	AX09	AX12	AX18	AX25	AX32	AX40
IEC	AC-3 Rated operational current	θ ≤ 55 °C, 400 V	A	9	12	18	25	32	40
	AC-1 Rated operational current	θ ≤ 40 °C, 690 V	A	22	25	27	32	55	60

Main accessories

Auxiliary contact blocks	Front mounting	**CA5X-10** (1 x N.O.) **CA5X-01** (1 x N.C.) **CA5X-4 pole** (add on block with 4 contacts N.O. or N.C. combination)	
	Side mounting	**CAL5X-11** (1 x N.O. + 1 x N.C.)	
Timers	Electronic	TEF5-ON TEF5-OFF	
Interlocking units	Mechanical	VM5-1	
	Mechanical / Electrical	VE5-1	
Surge suppressors	Varistor (AC / DC)	RV5 (24...440 V)	
	RC type (AC)	RC5-1 (24...440 V)	

Overload relays

Thermal relays		Class 10A	TA25DU-M (0.1...32A)	
				TA42DU-M (18...42 A)

(1) The max. AC-3 operational current is 23 A for AX25 with TA25DU-25M.
(2) The max. AC-3 operational current is 74 A for AX80 with TA75DU-80M.

Manual motor starters

	Thermal / magnetic protection Class 10	MS116 (0.10...32 A) Ics up to 50 kA for class 10A		
Accessories	For contactor mounting	BEA16/116 (3)	BEA25/116 (3)	
			BEA25/132 (4)	

(3) AX.. with MS116-0.16 ... MS116-16
(4) AX25 with MS116-20 ... MS116-32





	22	30	37	45	55	75
	AX50	**AX65**	**AX80**	**AX95**	**AX115**	**AX150**
	50 100	65 115	80 125	96 145	115 160	150 190

		CAL18X-11 (1 x N.O. + 1 x N.C.)
	VE5-2	
	RC5-2 (24...440 V)	

	TA75DU-M (18...80 A) (2)	**TA80DU-M**
		TA110DU-M

Short-circuit protection devices

MCCB and switch fuses




1L1
3L2
5L3
ABB
MS116
2T1
4T2
6T3

Manual motor starters

Overview
12 Overview

Ordering details – 0.10 to 65 A with thermal and electromagnetic protection
13 MS116 manual motor starters

14 **Technical data**

18 **Main accessories**

25 **General accessories**

2CDC131068C0201-revA

Manual motor starters
Overview



Type	MS116
Thermal and electromagnetic protection	Yes
Electromagnetic protection	-
Phase loss sensitivity	Yes
Switch position	ON/OFF
Magnetic trip indication	-
Lockable handle without accessories	-
Disconnecting feature	Yes
Width	45 mm
Rated operational current Ie	0.16 ... 32 A
Setting range	0.1 ...32 A
Ambient air temperature	-25 ... +55°C (1)

(1) Compensated

Main accessories

Auxiliary contact blocks		HKF1, HK1
Signalling contact	for tripped alarm	SK1
	for short circuit alarm	-
Shunt trip		AA1
Undervoltage release		UA1

Table for short circuit ratings for 400/415 V

		Standard range MS116		
Selection parameters				
Rated operational power	Setting range for thermal release	Type	Short-circuit breaking capacity	
			Icu	Ics
-	0.1 ... 0.16 A	MS116-0.16	50 kA	50 kA
0.06 kW	0.16 ... 0.25 A	MS116-0.25	50 kA	50 kA
0.09 kW	0.25 ... 0.4 A	MS116-0.4	50 kA	50 kA
0.18 kW	0.4 ... 0.63 A	MS116-0.63	50 kA	50 kA
0.25 kW	0.63 ... 1.0 A	MS116-1.0	50 kA	50 kA
0.55 kW	1.0...1.6 A	MS116-1.6	50 kA	50 kA
0.75 kW	1.6...2.5 A	MS116-2.5	50 kA	50 kA
1.5 kW	2.5...4.0 A	MS116-4.0	50 kA	50 kA
2.2 kW	4.0...6.3 A	MS116-6.3	50 kA	50 kA
4.0 kW	6.3...10 A	MS116-10	50 kA	50 kA
5.5 kW	8...12 A	MS116-12	25 kA	25 kA
7.5 kW	10...16 A	MS116-16	16 kA	16 kA
7.5 kW	16 ... 20 A	MS116-20	15 kA	10 kA
11 kW	20 .... 25 A	MS116-25	15 kA	10 kA
15 kW	25 .... 32 A	MS116-32	10 kA	10 kA

2CDC131055C0201-revA

MS116 manual motor starters

0.10 to 32 A - with thermal and electromagnetic protection



2CDC241010F0011

MS116-16



2CDC241001F0011

MS116-25



2CDC241013F0011

MS116-0.16-HKF1-11



2CDC241012F0011

MS116-32-HKF1-11

MS116 is a compact and economic range for motor protection up to 15 kW (400 V) / 32 A in width of 45 mm. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single phase applications. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, power in-feed blocks and locking devices for protection against unauthorized changes are available as accessory.
These are suitable throughout the MS116 range.

Rated operational power 400 V AC-3 kW	Setting range A	Short-circuit breaking capacity Ics at 400 V AC kA	Rated instantaneous short-circuit current setting Ii A	Type	Order code	Weight (1 pce)
0.03(2)	0.10 ... 0.16	50	2.00 (1)	MS116-0.16	1SAM250000R1001	0.225
0.06	0.16 ... 0.25	50	3.10 (1)	MS116-0.25	1SAM250000R1002	0.225
0.09	0.25 ... 0.40	50	5.00 (1)	MS116-0.4	1SAM250000R1003	0.225
0.18	0.40 ... 0.63	50	7.90 (1)	MS116-0.63	1SAM250000R1004	0.225
0.25	0.63 ... 1.00	50	12.5 (1)	MS116-1.0	1SAM250000R1005	0.225
0.55	1.00 ... 1.60	50	20.0 (1)	MS116-1.6	1SAM250000R1006	0.265
0.75	1.60 ... 2.50	50	31.3 (1)	MS116-2.5	1SAM250000R1007	0.265
1.50	2.50 ... 4.00	50	50.0	MS116-4.0	1SAM250000R1008	0.265
2.20	4.00 ... 6.30	50	78.8	MS116-6.3	1SAM250000R1009	0.265
4.00	6.30 ... 10.0	50	150	MS116-10	1SAM250000R1010	0.265
5.50	8.00 ... 12.0	25	180	MS116-12	1SAM250000R1012	0.265
7.50	10.0 ... 16.0	16	240	MS116-16	1SAM250000R1011	0.265
7.50	16.0 ... 20.0	10	300	MS116-20	1SAM250000R1013	0.310
11.0	20.0 ... 25.0	10	375	MS116-25	1SAM250000R1014	0.310
15.0	25.0 ... 32.0	10	480	MS116-32	1SAM250000R1015	0.310
0.03(2)	0.10 ... 0.16	50	2.00 (1)	MS116-0.16-HKF1-11	1SAM250005R1001	0.240
0.06	0.16 ... 0.25	50	3.10 (1)	MS116-0.25-HKF1-11	1SAM250005R1002	0.240
0.09	0.25 ... 0.40	50	5.00 (1)	MS116-0.4-HKF1-11	1SAM250005R1003	0.240
0.18	0.40 ... 0.63	50	7.90 (1)	MS116-0.63-HKF1-11	1SAM250005R1004	0.240
0.25	0.63 ... 1.00	50	12.5 (1)	MS116-1.0-HKF1-11	1SAM250005R1005	0.240
0.55	1.00 ... 1.60	50	20.0 (1)	MS116-1.6-HKF1-11	1SAM250005R1006	0.280
0.75	1.60 ... 2.50	50	31.3 (1)	MS116-2.5-HKF1-11	1SAM250005R1007	0.280
1.50	2.50 ... 4.00	50	50.0	MS116-4.0-HKF1-11	1SAM250005R1008	0.280
2.20	4.00 ... 6.30	50	78.8	MS116-6.3-HKF1-11	1SAM250005R1009	0.280
4.00	6.30 ... 10.0	50	150	MS116-10.0-HKF1-11	1SAM250005R1010	0.280
5.50	8.00 ... 12.0	25	180	MS116-12.0-HKF1-11	1SAM250005R1012	0.280
7.50	10.0 ... 16.0	16	240	MS116-16.0-HKF1-11	1SAM250005R1011	0.280
7.50	16.0 ... 20.0	10	300	MS116-20-HKF1-11	1SAM250005R1013	0.326
11.0	20.0 ... 25.0	10	375	MS116-25-HKF1-11	1SAM250005R1014	0.326
15.0	25.0 ... 32.0	10	480	MS116-32-HKF1-11	1SAM250005R1015	0.326

Note: Manual motor starters should always be selected so that the actual motor current is within the setting range.
(1) For other voltage version see voltage code table.
(2) 690 V

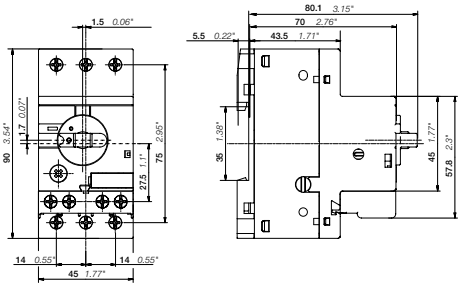

MS116 ≤ 16 A & MS116-HK1-11 ≤ 16 A

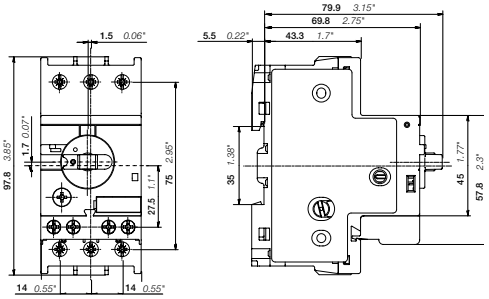

MS116 ≤ 20 A & MS116-HK1-11 ≤ 20 A

Main dimensions mm, inches

2CDC131062C0201-revA

MS116
Technical data

Main circuit - Utilization characteristics according to IEC/EN

Type		MS116
Standards		IEC/EN 60947–2, IEC/EN 60947-4-1, IEC/EN 60947-1
Rated operation voltage Ue		690 V AC
Rated frequency		50/60 Hz
Operational frequency		50/60 Hz
Trip class		10A
Number of poles		3
Duty time		100%
Mechanical durability		100000 cycles
Electrical durability	up to 16 A	100000 cycles
	20 ... 65 A	50000 cycles
Rated impulse withstand voltage Uimp		6 kV
Rated insulation voltage Ui		690 V
Rated operational current Ie		See ordering details
Rated operational current DC-5 Ie 3 conducting paths in series up to 250 V		-
Rated instantaneous short-circuit current setting Ii		See ordering details
Rated service short-circuit breaking capacity Ics		See table “Short-circuit breaking capacity and back-up fuses”
Rated ultimate short-circuit breaking capacity Icu		See table “Short-circuit breaking capacity and back-up fuses”
Rated service short-circuit breaking capacity DC Ics 3 conducting paths in series up to 250 V		-

Short-circuit breaking capacity and back-up fuses

ICS Rated service short-circuit breaking capacity

ICU Rated ultimate short-circuit breaking capacity

ICC Prospective short-circuit current at installation location

Note: Maximum rated current of the back-up fuses if Icc > Ics

Type	230 V AC			400 V AC			440 V AC			500 V AC			690 V AC		
	I_{cs}	I_{cu}	gG, aM	I_{cs}	I_{cu}	gG, aM	Ics	Icu	gG, aM	Ics	Icu	gG, aM	Ics	Icu	gG, aM
	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A
MS116-0.16	50	50	-(1)	50	50	-(1)	30	30	-(1)	30	30	-(1)	30	30	-(1)
MS116-0.25	50	50	-(1)	50	50	-(1)	30	30	-(1)	30	30	-(1)	30	30	-(1)
MS116-0.4	50	50	-(1)	50	50	-(1)	30	30	-(1)	30	30	-(1)	30	30	-(1)
MS116-0.63	50	50	-(1)	50	50	-(1)	30	30	-(1)	30	30	-(1)	30	30	-(1)
MS116-1.0	50	50	-(1)	50	50	-(1)	30	30	-(1)	30	30	-(1)	30	30	-(1)
MS116-1.6	50	50	-(1)	50	50	-(1)	30	30	-(1)	30	30	-(1)	30	30	-(1)
MS116-2.5	50	50	-(1)	50	50	-(1)	10	10	25(2)	10	10	25(2)	5	5	25(2)
MS116-4.0	50	50	-(1)	50	50	-(1)	6	6	25(2)	6	6	25(2)	2	2	25(2)
MS116-6.3	50	50	-(1)	50	50	-(1)	6	6	63(2)	6	6	63(2)	2	2	40(2)
MS116-10	50	50	-(1)	50	50	-(1)	6	6	63(2)	6	6	63(2)	2	2	50(2)
MS116-12	25	25	80(2)	25	25	80(2)	6	6	63(2)	6	6	63(2)	2	2	50(2)
MS116-16	16	16	80(2)	16	16	80(2)	4	4	63(2)	4	4	63(2)	2	2	63(2)
MS116-20	10	15	125(2)	10	15	125(2)	3	6	125(2)	3	4	125(2)	2	2	80(2)
MS116-25	10	15	125(2)	10	15	125(2)	3	6	125(2)	3	4	125(2)	2	2	100(2)
MS116-32	10	10	125(2)	10	10	125(2)	3	6	125(2)	3	4	125(2)	2	2	100(2)

(1) No back-up fuse required, because short-circuit proof up to 50 kA
(2) Rated back-up fuse for short-circuit up to 50 kA

2CDC131062C0201-revA

MS116
Technical data

Main circuit - Utilization characteristics according to UL/CSA

Type		MS116
Standards		UL 60947-1, UL 60947-4-1 (UL 508), CSA C22.2 No.60947-4-1 (CSA C22.2 No.14)
Rated operation voltage Ue acc. to UL/CSA		600 V AC
Trip class		10 A
Motor ratings (1)	Horsepower	See table “Motor ratings, three phase”
	Full Load Amps (FLA)	See table “Motor ratings, three phase”
	Locked Rotor Amps (LRA)	See table “Motor ratings, three phase”

(1) See product data sheets for UL/CSA single phase motor and general use (AC-1) ratings.

UL/CSA ratings overview

Type	MS116
Manual Motor Controller	X
Manual Motor Controller, Suitable as Motor Disconnect	X
Manual Motor Controller, Suitable for use in Group Installations	X
Manual Motor Controller, Suitable for Tap Conductor Protection in Group Installations	-
Manual self-protected Combination Motor Controller (Type E)	-
Combination Motor Controller (Type F)	-

UL/CSA Motor ratings, three phase – MS116

Type	200 V AC			208 V AC			220 ... 240 V AC			440 ... 480 V AC			550 ... 600 V AC		
	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA
MS116-0.16	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96
MS116-0.25	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5
MS116-0.40	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4
MS116-0.63	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78
MS116-1.0	-	1	6	-	1	6	-	1	6	-	1	6	1/2	1	6
MS116-1.6	-	1.6	9.6	-	1.6	9.6	-	1.6	9.6	3/4	1.6	9.6	3/4	1.6	9.6
MS116-2.5	1/2	2.5	15	1/2	2.5	15	1/2	2.5	15	1	2.5	15	1 1/2	2.5	15
MS116-4.0	3/4	4	24	3/4	4	24	1	4	24	2	4	24	3	3.9	25.6
MS116-6.3	1	6.3	37.8	1	6.3	37.8	1 1/2	6.3	37.8	3	4.8	32	5	6.1	36.8
MS116-10	2	7.8	57.5	2	7.5	55	3	9.6	64	5	7.6	46	7 1/2	9	50.8
MS116-12	3	11	73.6	3	10.6	71	3	9.6	64	7 1/2	11	63.5	10	11	64.8
MS116-16	3	11	73.6	3	10.6	71	5	15.2	92	10	14	81	10	11	64.8
MS116-20	5	17.5	105.8	5	16.7	102	5	15.2	92	10	14	81	15	17	93
MS116-25	5	17.5	105.8	7 1/2	24.2	140	7 1/2	22	127	15	21	116	20	22	116
MS116-32	7 1/2	25.3	146	10	30.8	179	10	28	162	20	27	145	25	27	146

2CDC131062C0201-revA

MS116
Technical data

UL/CSA Maximum short-circuit current ratings – MS116

Type	Manual Motor Controllers					
	Branch circuit protection, max. size per NEC/CEC(1)		for motor disconnect(2)		for group installations	
	Fuses	Circuit breaker	480 V	600 V	480 V	600 V
	A	A	kA	kA	kA	kA
MS116-0.16	100	-	30	5	30	5
MS116-0.25	100	-	30	5	30	5
MS116-0.40	100	-	30	5	30	5
MS116-0.63	100	-	30	5	30	5
MS116-1.0	100	-	30	5	30	5
MS116-1.6	100	-	30	5	30	5
MS116-2.5	100	-	30	5	30	5
MS116-4.0	100	-	18	5	18	5
MS116-6.3	100	-	18	5	18	5
MS116-10	100	-	18	5	18	5
MS116-12	100	-	18	5	18	5
MS116-16	100	-	18	5	18	5
MS116-20	100	-	18	5	18	5
MS116-25	100	-	18	5	18	5
MS116-32	100	-	18	5	18	5

(1) NEC: NFPA®70 National Electrical Code®; CEC: CSA C22.1 Canadian Electrical Code.
(2) Suitable as motor disconnect only when provide with padlock adaptor SA1 or SA3.

2CDC131062C0201-revA

MS116
Technical data

General technical data

Type			MS116
Pollution degree			3
Phase loss sensitivity			Yes
Disconnect function acc. to IEC/EN 60947-2			Yes
Ambient air temperature			
	Operation	Open - compensated	-25 ... +55 °C
		Open	-25 ... +70 °C
		Enclosed (IB132(1))	0 ... +40 °C
	Storage		-50 ... +80 °C
Ambient air temperature compensation			Acc. to IEC/EN60947-4-1
Maximum operating altitude permissible			2000 m
Resistance to shock acc. to IEC 60068-2-27			25g / 11 ms
Resistance to vibrations acc. to IEC 60068-2-6			5g / 3 ... 150 Hz
Mounting position			Position 1-6 (optional for single mounting)
Mounting			DIN-rail (EN 60715)
Group mounting			On request
Recommended screw for mounting plate			-
Screw torque for mounting plate			-
Minimum distance to other units same type		Horizontal	0 mm
		Vertical	150 mm
Minimum distance to electrical conductive board		Horizontal, up to 400 V	0 mm
		Horizontal, up to 690 V	> 1.5 mm
		Vertical	75 mm
Degree of protection		Housing	IP20
		Main circuit terminals	IP10

(1) not suitable for MS165 and MO165

Connecting characteristics - Main circuit

Type			MS116 ≤ 16 A	MS116 ≥ 20 A
Connecting capacity				
	Rigid	1 or 2 x	1 ... 4 mm²	2.5 ... 6 mm²
	Flexible with ferrule	1 or 2 x	0.75 ... 2.5 mm²	1 ... 6 mm²
	Flexible with insulated ferrule	1 or 2 x	0.75 ... 2.5 mm²	1 ... 6 mm²
	Flexible	1 or 2 x	0.75 ... 2.5 mm²	1 ... 6 mm²
	Stranded acc. to UL/CSA	1 or 2 x	AWG 16-12	AWG 16-8
Stripping length			9 mm	10 mm
Tightening torque			0.8 ... 1.2 Nm / 10 ... 12 lb.in	2.0 Nm / 18 lb.in
Recommended screw driver			Pozidriv 2	Pozidriv 2

2CDC131062C0201-revA

Main accessories

MS116



1SBC101208F0014

HKF1-11


1SBC101209F0014

HK1-11


1SBC101210F0014

SK1-11

MS116 can be equipped with auxiliary contacts for lateral/front mounting, signaling contacts for lateral mounting, undervoltage releases and shunt trips. Two different signaling contacts are available. The accessories can be fitted wiring free and without tools. A variety of combinations is possible as required for the application. The auxiliary contacts change position with the main contacts. The signaling contact SK signals tripping regardless if it was caused by short-circuit or overload. The signaling contact CK signals tripping in case it was caused by short-circuit. Undervoltage releases are used for remote tripping of the manual motor starters especially for emergency stop circuits. Shunt trips release the MMS used for remote tripping. These main accessories are suitable throughout the MS116 range.

Suitable for	Auxiliary contacts N.O.	Auxiliary contacts N.C.	Description	Type	Order code		Pkg qty	Weight (1 pce)
Auxiliary contacts – mountable on the front								
MS116	1	1		HKF1-11	1SAM201901R1001		10	0.015
	1	0		HKF1-10	1SAM201901R1003		10	0.013
	0	1		HKF1-01	1SAM201901R1004		10	0.013
	2	0		HKF1-20	1SAM201901R1002		10	0.015
Auxiliary contacts – mountable on the right								
MS116	1	1	max. 2 pieces	HK1-11	1SAM201902R1001		2	0.035
	2	0	max. 2 pieces	HK1-20	1SAM201902R1002		2	0.035
	0	2	max. 2 pieces	HK1-02	1SAM201902R1003		2	0.035
	2	0	with lead contacts	HK1-20L	1SAM201902R1004		2	0.035
Signaling contacts – mountable on the right								
MS116	1	1	for tripped alarm, max. 2 pieces	SK1-11	1SAM201903R1001		2	0.035
	2	0	for tripped alarm, max. 2 pieces	SK1-20	1SAM201903R1002		2	0.035
	0	2	for tripped alarm, max. 2 pieces	SK1-02	1SAM201903R1003		2	0.035

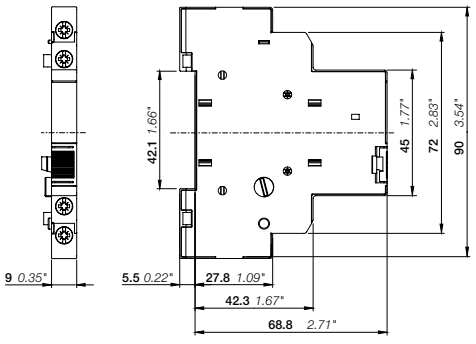

HK1

Main dimensions mm, inches

Main accessories

MS116



AA1-24



UA1-24

Suitable for	Rated control supply voltage		Type	Order code	Pkg qty	Weight (1 pce)
	50 Hz V AC	60 Hz V AC				kg
Shunt trips - mountable on the left						
MS116	20 ... 24	20 ... 24	AA1-24	1SAM201910R1001	1	0.100
	110	110	AA1-110	1SAM201910R1002	1	0.100
	200 ... 240	200 ... 240	AA1-230	1SAM201910R1003	1	0.100
	350 ... 415	350 ... 415	AA1-400	1SAM201910R1004	1	0.100
Undervoltage releases - mountable on the left						
MS116	20	24	UA1-20	1SAM201904R1010	1	0.100
	24	-	UA1-24	1SAM201904R1001	1	0.100
	48	-	UA1-48	1SAM201904R1002	1	0.100
	60	-	UA1-60	1SAM201904R1003	1	0.100
	110	120	UA1-110	1SAM201904R1004	1	0.100
	-	208	UA1-208	1SAM201904R1008	1	0.100
	230	240	UA1-230	1SAM201904R1005	1	0.100
	400	-	UA1-400	1SAM201904R1006	1	0.100
	415	480	UA1-415	1SAM201904R1007	1	0.100
	-	575	UA1-575	1SAM201904R1009	1	0.100

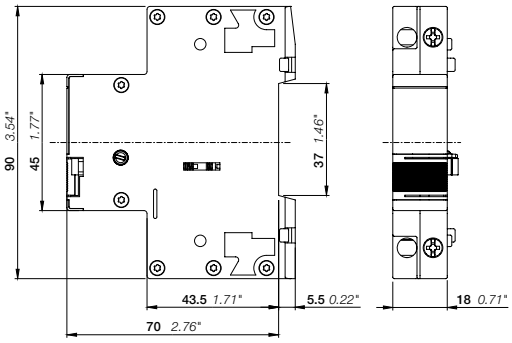

AA1, UA1

Main dimensions mm, inches

Main accessories

MS116

General technical data

Type		HK1, SK1, CK1	HKF1
Standards		IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60947-1	
Rated operational voltage Ue		690 V AC / 600 DC	250 V AC / 250 V DC
Conventional free-air thermal current Ith		6 A	5 A
Rated frequency		50/60 Hz	
Rated impulse withstand voltage Uimp		6 kV	
Rated insulation voltage Ui		690 V AC	250 V AC
Pollution degree		3	
Ambient air temperature	Operation	-25 ... +70 °C	
	Storage	-50 ... +80 °C	
Resistance to shock acc. to IEC 60068-2-27		25g / 11 ms	
Resistance to vibrations acc. to IEC 60068-2-6		5g / 3 ... 150 Hz	
Ie / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category			
	24 V, 120 V	6 A	3 A
	240 V	4 A	1.5 A
	400 V	3 A	-
	440 V, 690 V	1 A	-
Ie / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category			
	24 V	2 A	1 A
	125 V	0.55 A	0.27 A
	250 V	0.27 A	0.11 A
	440 V, 600 V	0.15 A	-
Minimum switching capacity		17 V / 5 mA	
Short-circuit protective device	N.C., 95-96	10 A Type gG	
	N.O., 97-98	10 A Type gG	
Duty time		100 %	
Mounting		Right side of MMS	Front of MMS
Mounting positions		1-6	
Mechanical durability		50000 cycles	-
Electrical durability		50000 cycles	-

Contact utilization characteristics according to UL/CSA

Type	**HK1, SK1, CK1**	**HKF1**
Standards	UL 60947-1, UL 60947-4-1 (UL 508), CSA C22.2 No.60947-4-1 (CSA C22.2 No.14)	
Rated operational voltage Ue acc. to UL/CSA	600 V AC / 600 V DC	250 V AC / 250 V DC
Pilot duty	A600, Q600	B300, Q300
AC thermal rated current	10 A	5 A
AC maximum volt-ampere making	7200 VA	3600 VA
AC maximum volt-ampere breaking	720 VA	360 VA
DC thermal rated current	2.5 A	2.5 A
DC maximum volt-ampere making-breaking	69 VA	69 VA

Connecting characteristics - Auxiliary circuit

Type			HK1, SK1, CK1	HKF1
Connecting capacity				
	Rigid	1 or 2 x	1 ... 1.5 mm²	1 ... 2.5 mm²
	Flexible with ferrule	1 or 2 x	0.75 ... 1.5 mm²	
	Flexible with insulated ferrule	1 or 2 x	0.75 ... 1.5 mm²	
	Flexible	1 or 2 x	0.75 ... 1.5 mm²	
	Stranded acc. to UL/CSA	1 or 2 x	AWG 16-14	
Stripping length			8 mm	
Tightening torque			0.8 ... 1.2 Nm / 7 lb.in	
Recommended screw driver			Pozidriv 2	

2CDC131050C0201-revA

Main accessories

MS116

General technical data

Type			UA1	AA1
Standards			IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1 (UL 508), CSA C22.2 No.60947-4-1 (CSA C22.2 No.14)	
Rated control supply voltage			see ordering details	AA1-24: 20-24 V 50/60 Hz; 20-70 V 50/60 Hz KB = 5 s, 20-70 V DC KB = 5 s AA1-100: 110 V 50/60 Hz; 110-200 V 50/60 Hz KB = 5 s, 110-200 V DC KB = 5 s AA1-230: 200-240 V 50/60 Hz, 200-350 V 50/60 Hz KB = 5 s, 200-350 V DC KB = 5 s AA1-400: 350-415 V 50/60 Hz, 350-500 V 50/60 Hz KB = 5 s, 350-500 V DC KB = 5 s
Rated frequency			see ordering details	50/60 Hz, DC
Operating voltage	Tripping		0.35 ... 0.7 x Us	0.7 ... 1.1 x Us
	Coil operating voltage		0.85 ... 1.1 x Us	-
Power consumption	Pull-in	AC	on request	on request
		DC	on request	on request
	Holding	AC	on request	-
		DC	on request	-
Rated impulse withstand voltage Uimp			6 kV	6 kV
Rated insulation voltage Ui			690 V	690 V
Pollution degree			3	3
Ambient air temperature	Operation		-25 .... +60 °C	-25 .... +60 °C
	Storage		-50 ...+80 °C	-50 ...+80 °C
Resistance to shock acc. to IEC 60068-2-27			25g / 11 ms	25g / 11 ms
Resistance to vibrations acc. to IEC 60068-2-6			5g / 3 ... 150 Hz	5g / 3 ... 150 Hz
Mounting			left side of MMS	left side of MMS
Mounting positions			-	-

Connecting characteristics - Auxiliary circuit

Type			UA1	AA1
Connecting capacity				
	Rigid	1 or 2 x	1 ... 4 mm²	
	Flexible with ferrule	1 or 2 x	0.75 ... 2.5 mm²	
	Flexible with insulated ferrule	1x	0.75 ... 2.5 mm²	
		2 x	0.75 ... 1.5 mm²	
	Flexible	1 or 2 x	0.75 ... 2.5 mm²	
	Stranded acc. to UL/CSA	1 or 2 x	AWG 16-12	
Stripping length			10 mm	
Tightening torque			0.8 ... 1.2 Nm / 7 lb.in	
Recommended screw driver			Pozidriv 2	

2CDC131050C0201-revA

Main accessories

MS116



PS1-2-0-65



PS1-3-1-100



S1-M1-25



S1-M2-25



SA2



SA1



PB1-1-32



S1-PB1-25

Three-phase busbars ensure a quick and safe connection and are therefore a cost effective solution. A variety of different three-phase busbars up to 100 A are in the assortment. Between 2 and 5 manual motor starters with none, one or two lateral auxiliary contacts can be connected. Different three-phase feeder terminals are available according to the application.
Phase connecting links and phase power infeed blocks are also available for single-phase applications.

Suitable for	Rated operational current A	Number of MMS	Number of lateral aux.	Type	Order code		Pkg qty	Weight (1 pce) kg
Three-phase busbars								
MS116	65	2	0	PS1-2-0-65	1SAM201906R1102		10	0.034
	65	3	0	PS1-3-0-65	1SAM201906R1103		10	0.055
	65	4	0	PS1-4-0-65	1SAM201906R1104		10	0.077
	65	5	0	PS1-5-0-65	1SAM201906R1105		10	0.098
	65	2	1	PS1-2-1-65	1SAM201906R1112		10	0.036
	65	3	1	PS1-3-1-65	1SAM201906R1113		10	0.060
	65	4	1	PS1-4-1-65	1SAM201906R1114		10	0.087
	65	5	1	PS1-5-1-65	1SAM201906R1115		10	0.108
	65	2	2	PS1-2-2-65	1SAM201906R1122		10	0.040
	65	3	2	PS1-3-2-65	1SAM201906R1123		10	0.067
	65	4	2	PS1-4-2-65	1SAM201906R1124		10	0.095
	65	5	2	PS1-5-2-65	1SAM201906R1125		10	0.122
MS116	100	3	0	PS1-3-0-100	1SAM201916R1103		10	0.084
	100	4	0	PS1-4-0-100	1SAM201916R1104		10	0.117
	100	5	0	PS1-5-0-100	1SAM201916R1105		10	0.154
	100	3	1	PS1-3-1-100	1SAM201916R1113		10	0.094
	100	4	1	PS1-4-1-100	1SAM201916R1114		10	0.134
	100	5	1	PS1-5-1-100	1SAM201916R1115		10	0.172
	100	3	2	PS1-3-2-100	1SAM201916R1123		10	0.105

Suitable for	Rated operational current A	Number of MMS mm²	Number of lateral aux.	Type	Order code		Pkg qty	Weight (1 pce) kg
Three-phase terminals								
MS116	65	25	Flat	S1-M1-25	1SAM201907R1101		10	0.038
	65	25	High	S1-M2-25	1SAM201907R1102		10	0.051
	65	25	UL/CSA Type E/F and IEC	S1-M3-25	1SAM201907R1103		10	0.042
	100	35	UL/CSA Type E/F and IEC	S1-M3-35	1SAM201913R1103		10	0.060

Suitable for	Description	Type	Order code		Pkg qty	Weight (1 pce) kg
MS116	Protection cover for busbars	BS1-3	1SAM201908R1001		50	0.003
MS116	Screw fixing kit	FS116	1SAM201909R1001		1	0.020
	Padlock + two keys	SA2	GJF1101903R0002		10	0.020
MS116	Lock handle	SA1	GJF1101903R0001		10	0.003
	Lock handle box SA1/SA2	SA3	GJF1101903R0003		10	0.050
Accessories for single-phase connection (IEC only)						
MS116	Phase connecting link	PB1-1-32	1SAM201914R1001		1	0.009
	Phase power infeed block	S1-PB1-25	1SAM201914R1002		1	0.013

2CDC131050C0201-revA

Main accessories

MS116

General technical data

Type		PS1-xxx-65	PS1-xxx-100	S1-Mx-25	S1-Mx-35
Standards		IEC/EN 60947-4-1, IEC/EN 60947-1, UL 60947-1, UL 60947-4-1 (UL 508), CSA C22.2 No.60947-4-1 (CSA C22.2 No.14)			
Rated operational voltage Ue		690 V			
Rated operational voltage Ue acc. to UL/CSA		600 V AC			
Rated operational current Ie		65 A	100 A	65 A	100 A
Rated operational current Ie acc. to UL/CSA		65 A	92 A	65 A	92 A
Rated frequency		50/60 Hz			
Rated impulse withstand voltage Uimp		6 kV			
Rated insulation voltage Ui		690 V AC			
Pollution degree		3			
Cross-section		10 mm²	16 mm²	25 mm²	35 mm²
Ambient air temperature	Operation	-25 ... +70 °C			
	Storage	-50 ... +80 °C			
Resistance to shock acc. to IEC 60068-2-27		25g / 11 ms			
Resistance to vibrations acc. to IEC 60068-2-6		5g / 3 ... 150 Hz			

Electrical connection

Type			S1-Mx-25	S1-Mx-35
Connecting capacity				
	Rigid	1 x	6 ... 25 mm²	10 ... 35 mm²
	Flexible with ferrule	1 x	6 ... 16 mm²	10 ... 35 mm²
	Flexible with insulated ferrule	1 x	6 ... 16 mm²	10 ... 35 mm²
	Flexible	1 x	6 ... 16 mm²	10 ... 35 mm²
	Stranded acc. to UL/CSA	1 x	AWG 10-4	AWG 8-2
Stripping length			10 mm	12 mm
Tightening torque			2.5 Nm / 22 lb.in	4.5 Nm / 40 lb.in
Recommended screw driver			Pozidriv 2	Hexagon SW4

Technical data for PS2-xxx on request.

2CDC131050C0201-revA

Main accessories

MS116



IB132-Y



IB132-G



DMS132-Y



DMS132-G

IB132 are IP65 (UL/CSA Type 12) enclosures for single MMS installation. Additional mounting of auxiliary and signaling contacts, shunt trips and undervoltage release is possible. The handle is lockable in OFF position. For detailed specification see installation instruction.

DMS132 are IP65 (UL/CSA Type 12) door mounting kits for MMS installation in any enclosure. Additional mounting of auxiliary, signaling, shunt trips and undervoltage release is possible. The handle is lockable in OFF position. For detailed specification see installation instruction.

Suitable for	Description	Color	Type	Order code	Pkg qty	Weight (1 pce) kg
IP65 enclosures (UL/CSA Type 12)						
MS116	Padlockable max. 3 padlocks with bail diameter 4 ... 6.5 mm	Yellow/red	IB132-Y	1SAM201911R1011	1	0.370
		Grey/black	IB132-G	1SAM201911R1010	1	0.370
IP65 door mounting kits (UL/CSA Type 12)						
MS116	Padlockable max. 3 padlocks with bail diameter 4 ... 6.5 mm	Yellow/red	DMS132-Y	1SAM201912R1011	1	0.170
		Grey/black	DMS132-G	1SAM201912R1010	1	0.170

Indication I-O-T and ON-OFF-T
Please check for further equipment chapter General accessories.

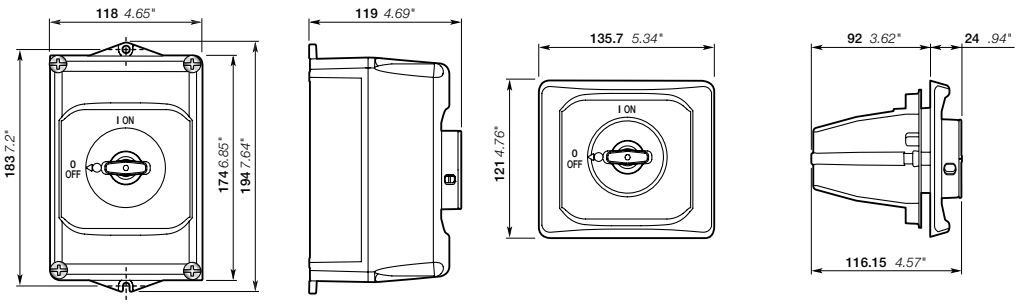

IB132 DMS132

Main dimensions mm, inches

2CDC131050C0201-revA

General accessories

MS116



2CDC241003F0011

MSHD-LB



2CDC241002S0011

MSHD-LY


2CDC241004F0011

MSMN


2CDC241001F0012

MSH-AR


2CDC241017V0013

MSAH1

With this solution of door coupling rotary mechanism it is possible to operate a manual motor starter in the back of a switch cabinet from outside. The door coupling mechanism prevents opening of the door of a switch cabinet with the manual motor starter in ON position.

The complete mechanism includes handle, shaft, driver, shaft alignment ring and shaft supporter.

Most accessories fit for 6 mm shafts with a maximum length of 180 mm. The degree of protection for handles MSHD is IP64 (UL/CSA Type 1, 3R, 12).

Suitable for	Description	Shaft length mm	Color	Type	Order code		Pkg qty	Weight (1 pce) kg
Shafts								
MS116	For MSHD handles. Shaft diameter 6 mm. Shaft extension for door coupling driver.	85		OXS6X85	1SCA101647R1001		1	0.020
		105		OXS6X105	1SCA108043R1001		1	0.020
		130		OXS6X130	1SCA101655R1001		1	0.030
		180		OXS6X180	1SCA101659R1001		1	0.040
IP64 handles (UL/CSA Type 1, 3R, 12)								
MS116	Padlockable max. 3 padlocks with bail diameter 5 ... 8 mm, door interlock in ON position defeatable, for use with 6 mm OXS6...types up to 180 mm or driver shafts MSOX.		Black	MSHD-LB (1)	1SAM201920R1001		1	0.065
			Yellow	MSHD-LY (1)	1SAM201920R1002		1	0.065
			Black	MSHD-LTB (2)	1SAM201920R1011		1	0.065
			Yellow	MSHD-LTY(2)	1SAM201920R1012		1	0.065
Driver								
MS116	Coupling driver for use with 6 mm OXS6... types up to 180 mm.			MSMN (3)	1SAM101923R0002		1	0.002
				MSMNO (4)	1SAM101923R0012		1	0.002
Shaft alignment ring								
MS116	The MSH-AR supports the long shafts for alignment to the handle inlet. It makes closing panel doors more easy. Use for OXS6X > 105 mm.			MSH-AR	1SAM201920R1000		1	0.010
Shaft supporter								
MS116	With the MSAH it is possible to support the shaft in the extension of handle (MSHD). It is mandatory for the usage of shafts >130 mm.			MSAH1	1SAM201909R1021		1	0.035

(1) Indication I-O and ON-OFF (recommended for MS116)
(2) Indication I-O and ON-OFF + Trip indication
(3) Coded - Positioning of ON indication dependent from mounting orientation of the MMS
(4) Uncoded - Positioning of ON indication independent from mounting orientation of the MMS


ABB
AX95-30
1L1
3L2
5L3
2T1
4T2
6T3

AX contactors and NX contactor relays

AX 3-pole contactors
28 Ordering details 3-pole contactors
34 Main accessories
37 Technical data 3-pole contactors
46 DC circuit switching
47 Electrical durability and utilization categories
48 Electrical durability
51 Star-delta starting of three-phase asynchronous motors
53 Terminal marking and positioning
54 Dimensions

NX contactor relays
58 Ordering details
59 Main accessories
60 Technical data
62 Terminal marking and positioning

Accessories for AX contactors and NX contactor relays
64 Auxiliary contact blocks
65 Technical data
68 Add-on auxiliary contacts
69 Electronic timers
72 Mechanical and electrical interlock units
74 Interface relays
76 Mechanical latching units
78 Surge suppressors for contactor coils
80 Additional terminal blocks
81 Function markers
82 Terminal connecting strips and shorting bars
83 Connection accessories for starting solutions
84 Phase to phase connections

85 **Voltage code table**

AX09 ... AX12 3-pole contactors
4 to 5.5 kW
AC operated



AX09... AX12

AX09 ... AX12 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC.

These contactors are of the block type design with:
- 3 main poles and 1 built-in auxiliary contact
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

IEC		Rated control circuit voltage Uc (1)		Auxiliary contacts fitted	Type	Order code	Weight (1 pce)
Rated operational power 400 V	current θ ≤ 40 °C						
AC-3	AC-1						
kW	A	V 50 Hz	V 60 Hz				kg
4	22	24	24	1 0	AX09-30-10-81	1SBL901074R8110	0.340
				0 1	AX09-30-01-81	1SBL901074R8101	0.340
		105	110...127	1 0	AX09-30-10-26	1SBL901074R2610	0.340
				0 1	AX09-30-01-26	1SBL901074R2601	0.340
		200	200...220	1 0	AX09-30-10-75	1SBL901074R7510	0.340
				0 1	AX09-30-01-75	1SBL901074R7501	0.340
		380...400	400...415	1 0	AX09-30-10-85	1SBL901074R8510	0.340
				0 1	AX09-30-01-85	1SBL901074R8501	0.340
5.5	25	24	24	1 0	AX12-30-10-81	1SBL911074R8110	0.340
				0 1	AX12-30-01-81	1SBL911074R8101	0.340
		105	110...127	1 0	AX12-30-10-26	1SBL911074R2610	0.340
				0 1	AX12-30-01-26	1SBL911074R2601	0.340
		200	200...220	1 0	AX12-30-10-75	1SBL911074R7510	0.340
				0 1	AX12-30-01-75	1SBL911074R7501	0.340
		380...400	400...415	1 0	AX12-30-10-85	1SBL911074R8510	0.340
				0 1	AX12-30-01-85	1SBL911074R8501	0.340

(1) For other voltage version see voltage code table.

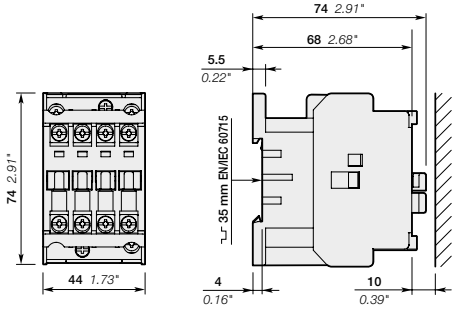

AX09, AX12

Main dimensions mm, inches

AX18 ... AX25 3-pole contactors
7.5 to 11 kW
AC operated



AX18

AX18 ... AX25 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC.

These contactors are of the block type design with:
- 3 main poles and 1 built-in auxiliary contact
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

IEC		Rated control circuit voltage Uc (1)		Auxiliary contacts fitted	Type	Order code	Weight (1 pce)
Rated operational power 400 V	current θ ≤ 40 °C						
AC-3	AC-1						
kW	A	V 50 Hz	V 60 Hz				kg
7.5	27	24	24	1 0	AX18-30-10-81	1SBL921074R8110	0.340
				0 1	AX18-30-01-81	1SBL921074R8101	0.340
		105	110...127	1 0	AX18-30-10-26	1SBL921074R2610	0.340
				0 1	AX18-30-01-26	1SBL921074R2601	0.340
		200	200...220	1 0	AX18-30-10-75	1SBL921074R7510	0.340
				0 1	AX18-30-01-75	1SBL921074R7501	0.340
		380...400	400...415	1 0	AX18-30-10-85	1SBL921074R8510	0.340
				0 1	AX18-30-01-85	1SBL921074R8501	0.340
11	32	24	24	1 0	AX25-30-10-81	1SBL931074R8110	0.340
				0 1	AX25-30-01-81	1SBL931074R8101	0.340
		105	110...127	1 0	AX25-30-10-26	1SBL931074R2610	0.340
				0 1	AX25-30-01-26	1SBL931074R2601	0.340
		200	200...220	1 0	AX25-30-10-75	1SBL931074R7510	0.340
				0 1	AX25-30-01-75	1SBL931074R7501	0.340
		380...400	400...415	1 0	AX25-30-10-85	1SBL931074R8510	0.340
				0 1	AX25-30-01-85	1SBL931074R8501	0.340

(1) For other voltage version see voltage code table.

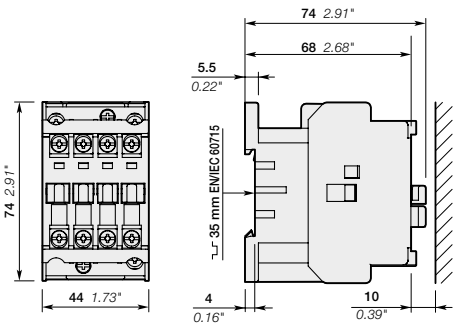

AX18

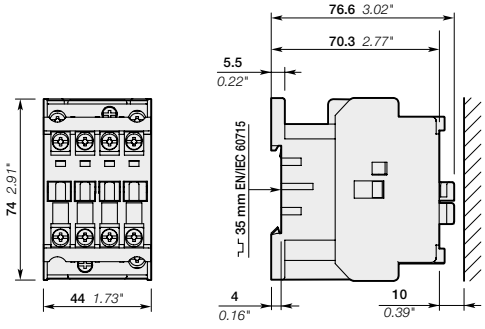

AX25

Main dimensions mm, inches

1SBC100455S0201

AX32, AX40 3-pole contactors
15 to 18.5 kW
AC operated



AX32, AX40

AX32, AX40 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC.

These contactors are of the block type design with:
- 3 main poles and 1 built-in auxiliary contact
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

IEC		Rated control circuit voltage Uc (1)		Auxiliary contacts fitted	Type	Order code	Weight (1 pce)
Rated operational power 400 V AC-3 kW	current θ ≤ 40 °C AC-1 A	V 50 Hz	V 60 Hz				kg
15	55	24	24	1 0	AX32-30-10-81	1SBL281074R8110	0.710
				0 1	AX32-30-01-81	1SBL281074R8101	0.710
		105	110...127	1 0	AX32-30-10-26	1SBL281074R2610	0.710
				0 1	AX32-30-01-26	1SBL281074R2601	0.710
		200	200...220	1 0	AX32-30-10-75	1SBL281074R7510	0.710
				0 1	AX32-30-01-75	1SBL281074R7501	0.710
		380...400	400...415	1 0	AX32-30-10-85	1SBL281074R8510	0.710
				0 1	AX32-30-01-85	1SBL281074R8501	0.710
18.5	60	24	24	1 0	AX40-30-10-81	1SBL321074R8110	0.710
				0 1	AX40-30-01-81	1SBL321074R8101	0.710
		105	110...127	1 0	AX40-30-10-26	1SBL321074R2610	0.710
				0 1	AX40-30-01-26	1SBL321074R2601	0.710
		200	200...220	1 0	AX40-30-10-75	1SBL321074R7510	0.710
				0 1	AX40-30-01-75	1SBL321074R7501	0.710
		380...400	400...415	1 0	AX40-30-10-85	1SBL321074R8510	0.710
				0 1	AX40-30-01-85	1SBL321074R8501	0.710

(1) For other voltage version see voltage code table.

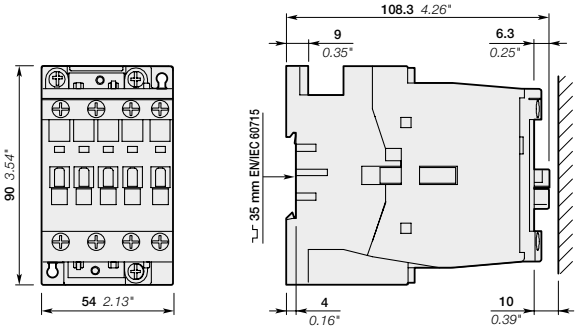

AX32, AX40

Main dimensions mm, inches

1SBC100456S0201 rev.B

AX50 ... AX80 3-pole contactors
22 to 37 kW
AC operated



AX50 ... AX80

AX50 ... AX80 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC.

These contactors are of the block type design with:
- 3 main poles
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details (without auxiliary block)

IEC		Rated control circuit voltage Uc (1)		Auxiliary contacts fitted	Type	Order code	Weight (1 pce)
Rated operational power 400 V AC-3	current θ ≤ 40 °C AC-1						
kW	A	V 50 Hz	V 60 Hz				kg
22	100	24	24	0 0	AX50-30-00-81	1SBL351074R8100	1.120
		105	110...127	0 0	AX50-30-00-26	1SBL351074R2600	1.120
		200	200...220	0 0	AX50-30-00-75	1SBL351074R7500	1.120
		380...400	400...415	0 0	AX50-30-00-85	1SBL351074R8500	1.120
30	115	24	24	0 0	AX65-30-00-81	1SBL371074R8100	1.120
		105	110...127	0 0	AX65-30-00-26	1SBL371074R2600	1.120
		200	200...220	0 0	AX65-30-00-75	1SBL371074R7500	1.120
		380...400	400...415	0 0	AX65-30-00-85	1SBL371074R8500	1.120
37	125	24	24	0 0	AX80-30-00-81	1SBL411074R8100	1.120
		105	110...127	0 0	AX80-30-00-26	1SBL411074R2600	1.120
		200	200...220	0 0	AX80-30-00-75	1SBL411074R7500	1.120
		380...400	400...415	0 0	AX80-30-00-85	1SBL411074R8500	1.120

(1) For other voltage version see voltage code table.

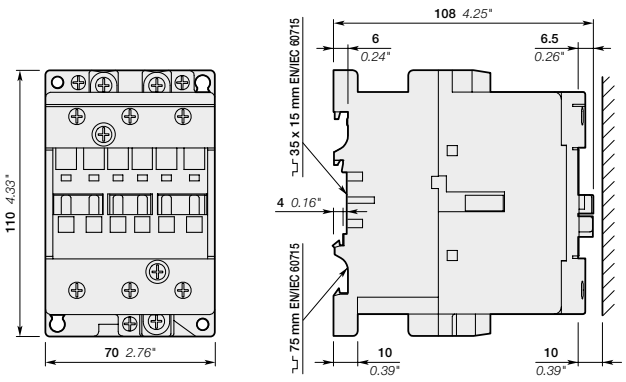

AX50, AX65, AX80

Main dimensions mm, inches

AX50 ... AX80 3-pole contactors
22 to 37 kW
AC operated with 1 N.O. + 1 N.C. auxiliary contacts



AX50 ... AX80

AX50 ... AX80 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC.

These contactors are of the block type design with:
- 3 main poles and 1 side mounted auxiliary contact block
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

IEC		Rated control circuit voltage Uc (1)		Auxiliary contacts fitted	Type	Order code	Weight (1 pce)
Rated operational power 400 V AC-3	current θ ≤ 40 °C AC-1						
kW	A	V 50 Hz	V 60 Hz				kg
22	100	24	24	1 1	AX50-30-11-81	1SBL351074R8111	1.160
		105	110...127	1 1	AX50-30-11-26	1SBL351074R2611	1.160
		200	200...220	1 1	AX50-30-11-75	1SBL351074R7511	1.160
		380...400	400...415	1 1	AX50-30-11-85	1SBL351074R8511	1.160
30	115	24	24	1 1	AX65-30-11-81	1SBL371074R8111	1.160
		105	110...127	1 1	AX65-30-11-26	1SBL371074R2611	1.160
		200	200...220	1 1	AX65-30-11-75	1SBL371074R7511	1.160
		380...400	400...415	1 1	AX65-30-11-85	1SBL371074R8511	1.160
37	125	24	24	1 1	AX80-30-11-81	1SBL411074R8111	1.160
		105	110...127	1 1	AX80-30-11-26	1SBL411074R2611	1.160
		200	200...220	1 1	AX80-30-11-75	1SBL411074R7511	1.160
		380...400	400...415	1 1	AX80-30-11-85	1SBL411074R8511	1.160

(1) For other voltage version see voltage code table.

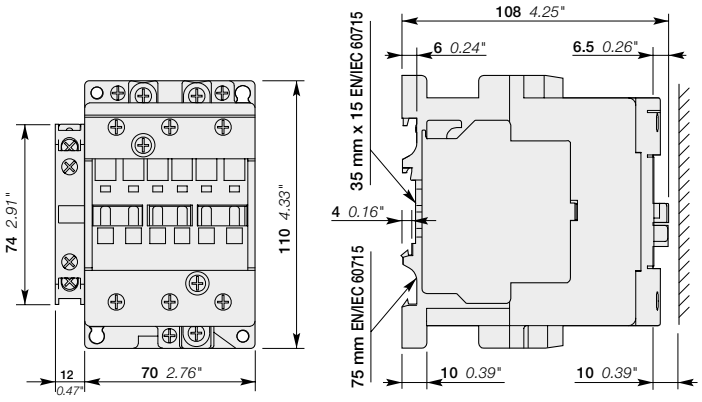

AX50, AX65, AX80

Main dimensions mm, inches

1SBC100458S0201-revA

AX95 ... AX150 3-pole contactors
45 to 75 kW
AC operated with 1 N.O. + 1 N.C. auxiliary contacts



AX95 ... AX150

AX95 ... AX150 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC.

These contactors are of the block type design with:
- 3 main poles and 1 side mounted auxiliary contact block
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

IEC Rated operational power 400 V AC-3 kW	current θ ≤ 40 °C AC-1 A	Rated control circuit voltage Uc (1) V 50 Hz	V 60 Hz	Auxiliary contacts fitted	Type	Order code	Weight (1 pce) kg
45	145	24	24	1 1	AX95-30-11-81	1SFL431074R8111	2.08
		105	110...127	1 1	AX95-30-11-26	1SFL431074R2611	2.08
		200	200...220	1 1	AX95-30-11-75	1SFL431074R7511	2.08
		380...400	400...415	1 1	AX95-30-11-85	1SFL431074R8511	2.08
55	160	24	24	1 1	AX115-30-11-81	1SFL981074R8111	2.08
		105	110...127	1 1	AX115-30-11-26	1SFL981074R2611	2.08
		200	200...220	1 1	AX115-30-11-75	1SFL981074R7511	2.08
		380...400	400...415	1 1	AX115-30-11-85	1SFL981074R8511	2.08
75	190	24	24	1 1	AX150-30-11-81	1SFL991074R8111	2.08
		105	110...127	1 1	AX150-30-11-26	1SFL991074R2611	2.08
		200	200...220	1 1	AX150-30-11-75	1SFL991074R7511	2.08
		380...400	400...415	1 1	AX150-30-11-85	1SFL991074R8511	2.08

(1) For other voltage version see voltage code table.

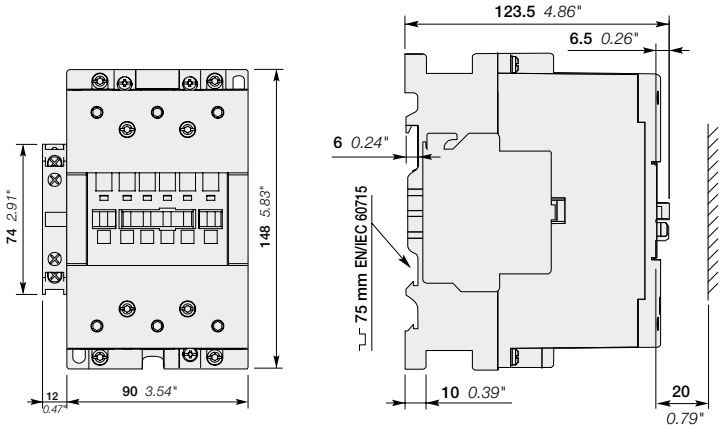

AX95, AX115, AX150

Main dimensions mm, inches

1SBC100168S0201-revA

AX09 ... AX150 3-pole contactors

Main accessories

Contactor and main accessories (other accessories available)

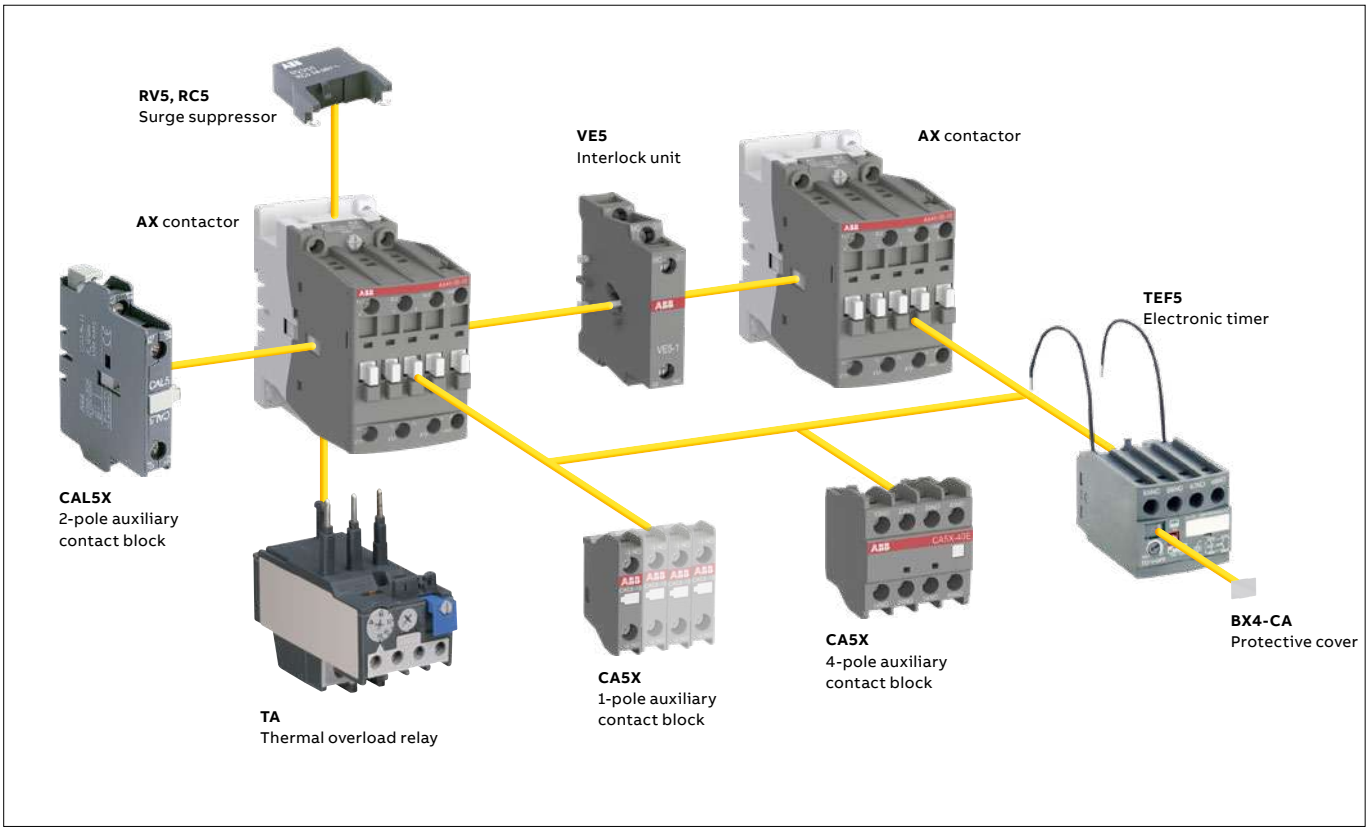

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

Contactor types	Main poles	Built-in auxiliary contacts	Front-mounted accessories Auxiliary contact blocks				Electronic timer		Side-mounted accessories Auxiliary contact blocks		Interlock unit
			1-pole CA5X		4-pole CA5X		TEF5		2-pole CAL		VM5 or VE5
AX09 ... AX25	3 0 3 0	1 0 0 1 (1)	1 to 4 x CA5X 1 to 2 x CE5 max (2)	or	1 x CA5X (4-pole)	or	1 x TEF5	+	1 to 2 x CAL5X-11	or	1 x VM5-1 or VE5-1 +1 x CAL5X-11
AX32, AX40	3 0 3 0	1 0 0 1 (1)	1 to 5 x CA5X 1 to 3 x CE5 max (3)	or	1 x CA5X (4-pole) + 1 x 1-pole CA5X or CE5 (3)	or	1 x TEF5 + 1 x CA5X (1-pole)	+	1 to 2 x CAL5X-11	or	1 x VM5-1 or VE5-1 +1 x CAL5X-11
AX50 ... AX80	3 0	0 0	1 to 6 x CA5X 1 to 5 x CE5 max (4)	or	1 x CA5X (4-pole) + 2 x 1-pole CA5X or CE5 (4)	or	1 x TEF5 + 2 x CA5X (1-pole)	+	2 x CAL5X-11	or	1 x VE5-2
AX50 ... AX80	3 0	1 1	1 to 6 x CA5X 1 to 5 x CE5 max (4)	or	1 x CA5X (4-pole) + 2 x 1-pole CA5X or CE5 (4)	or	1 x TEF5 + 2 x CA5X (1-pole)	+	1 x CAL5X-11	or	1 x VE5-2
AX95 ... AX150	3 0	1 1	1 to 6 x CA5X	or	1 x CA5X (4-pole) + 2 x 1-pole CA5X		–	+	1 x CAL18X-11	or	1 x VE5-2

(1) 2 N.C. CA5X auxiliary contacts maximum in mounting position 5. for mounting position refer technical data page.
(2) The total number of N.O. or N.C. CE5 and other N.C. CA5X is limited to 2. CE5 not allowed in mounting position 5.
(3) The total number of N.O. or N.C. CE5 and other N.C. CA5X is limited to 3. CE5 not allowed in mounting position 5.
(4) The total number of N.O. or N.C. CE5 and other N.C. CA5X is limited to 5. CE5 not allowed in mounting position 5.

Overload relays fitting details (1)

Contactor types	Thermal overload relays
AX09 ... AX25	TA25DU-M (0.1...32 A)
AX32, AX40	TA25DU-M (0.1...32 A) or TA42DU-M (18...42 A)
AX50 ... AX80	TA75DU-M (18...80 A)
AX95 ... AX150	TA80DU-M (29...80 A) or TA110DU-M (66...110 A)

The addition of a thermal overload relay on the contactor does not prevent fitting of many other accessories as shown above.
(1) Direct mounting - No kit required.

1SBC100216S0201-revA

AX09 ... AX150 3-pole contactors

Main accessories



CA5X-10



CA5X-4P



CAL5X-11



VE5-1

For contactors	Auxiliary contacts	Type	Order code	Pkg qty	Weight (1 pce) kg
Front-mounted instantaneous auxiliary contact blocks					
AX09 ... AX150 and NX 4-pole	1 –	CA5X-10	1SBN019010R1010	10	0.014
	– 1	CA5X-01	1SBN019010R1001	10	0.014
AX50 ... AX150	2 2	CA5X-22E	1SBN019040R1022	2	0.060
AX09 ... AX40-30-10	2 2	CA5X-22M	1SBN019040R1122	2	0.060
Side-mounted instantaneous auxiliary contact block, 2 poles					
AX09 ... AX80 and NX - 4 pole	1 1	CAL5X-11	1SBN019020R1011	2	0.050
AX95 ... AX150 (1)	1 1	CAL18X-11	1SFN019820R1011	2	0.050

Mechanical interlock units for two horizontal mounted contactors (2)

Left side contactor	Right side contactor	Mounting					
AX09 ... AX40	AX09 ... AX40	Mech.	– –	VM5-1	1SBN030100R1000	1	0.066

Mechanical and electrical interlock units for two horizontal mounted contactors

Left side contactor	Right side contactor	Mounting					
AX09 ... AX40	AX09 ... AX40	Mech. + Elect.	– 2	VE5-1	1SBN030110R1000	1	0.076
AX32 ... AX80	AX50 ... AX80	Mech. + Elect.	– 2	VE5-2	1SBN030210R1000	1	0.146
AX50 ... AX80	AX32 ... AX80	Mech. + Elect.	– 2	VE5-2	1SBN030210R1000	1	0.146
AX50 ... AX80	AX95 ... AX150	Mech. + Elect.	– 2	VE5-2 (3)	1SBN030210R1000	1	0.146
AX95 ... AX150	AX50 ... AX80	Mech. + Elect.	– 2	VE5-2 (3)	1SBN030210R1000	1	0.146
AX95 ... AX150	AX95 ... AX150	Mech. + Elect.	– 2	VE5-2	1SBN030210R1000	1	0.146

(1) See "Main accessory fitting details".
(2) Mechanical durability: VM5-1 = 5 millions cycles, VM300H = 1 million cycles.
(3) The combination of AX50 ... AX80 contactors interlocked with AX95 ... AX150 contactors cannot be mounted on symmetrical rail (75 mm, IEC/EN 60715).

AX09 ... AX150 3-pole contactors

Main accessories



TEF5-OFF

For contactors	Time delay range selected by switch	Delay type	Auxiliary contacts	Type	Order code	Pkg qty	Weight (1 pce) kg
Electronic timers							
AX09 ... AX80 NX 4 pole	0.1...1 s 1...10 s 10...100 s	ON-delay OFF-delay	1 1 1 1	TEF5-ON TEF5-OFF	1SBN020312R1000 1SBN020314R1000	1 1	0.065 0.065

Note: Rated control circuit voltage Uc 24...240 V 50/60 Hz or DC.



BEA

For contactors	MMS type	Type	Order code	Pkg qty	Weight (1 pce) kg
Connecting links with manual motor starters					
AX09 ... AX16	MS116-0.16 ... MS116-16	BEA16/116	1SBN081406R1000	10	0.020
AX25	MS116-0.16 ... MS116-16	BEA25/116	1SBN089306T1000	10	0.020
AX25	MS116-20 ... MS116-32	BEA25/132	1SBN089306T1001	10	0.020



RV5/50

For contactors	Rated control circuit voltage Uc V AC	Type	Order code	Pkg qty	Weight (1 pce) kg
Surge suppressors					
AX09 ... AX150	24...50	RV5/50	1SBN050010R1000	2	0.015
	50...133	RV5/133	1SBN050010R1001	2	0.015
	110...250	RV5/250	1SBN050010R1002	2	0.015
	250...440	RV5/440	1SBN050010R1003	2	0.015
AX09 ... AX40	24...50	RC5-1/50	1SBN050100R1000	2	0.012
	50...133	RC5-1/133	1SBN050100R1001	2	0.012
	110...250	RC5-1/250	1SBN050100R1002	2	0.012
	250...440	RC5-1/440	1SBN050100R1003	2	0.012
AX50 ... AX150	24...50	RC5-2/50	1SBN050200R1000	2	0.015
	50...133	RC5-2/133	1SBN050200R1001	2	0.015
	110...250	RC5-2/250	1SBN050200R1002	2	0.015
	250...440	RC5-2/440	1SBN050200R1003	2	0.015



WB75-A

For contactors	Rated control circuit voltage Uc 50Hz	60 Hz	Type	Order code	Pkg qty	Weight (1 pce) kg
Mechanical latching units						
AX09 ... AX80	24	24...28	WB75-A	FPTN372726R1001	1	0.120
	220...230	220...255	WB75-A	FPTN372726R1006	1	0.120

(1) See "Main accessory fitting details".

AX06 ... AX40 3-pole contactors

Technical data

Main pole - Utilization characteristics according to IEC

Contactor types	AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Standards		IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1					
Rated operational voltage Ue max.		690 V					
Rated frequency (without derating)		50 / 60 Hz					
Conventional free-air thermal current Ith							
acc. to IEC 60947-4-1, open contactors, θ ≤ 40 °C		24 A	26 A	28 A	32 A	65 A	65 A
With conductor cross-sectional area		4 mm²	4 mm²	4 mm²	6 mm²	16 mm²	16 mm²
AC-1 Utilization category							
For air temperature close to contactor							
Ie / Rated operational current AC-1	θ ≤ 40 °C	22 A	25 A	27 A	32 A	55 A	60 A
Ue max. ≤ 690 V, 50/60 Hz	θ ≤ 55 °C	22 A	22 A	25 A	27 A	55 A	60 A
	θ ≤ 70 °C	18 A	18 A	20 A	23 A	39 A	42 A
With conductor cross-sectional area		2.5 mm²	2.5 mm²	4 mm²	6 mm²	10 mm²	16 mm²
AC-3 Utilization category							
For air temperature close to contactor θ ≤ 55 °C							
Ie / Max. rated operational current AC-3 (1)							
M 3~ 3-phase motors	220-230-240 V	9 A	12 A	18 A	25 A	32 A	40 A
	380-400 V	9 A	12 A	18 A	25 A	32 A	40 A
	415 V	9 A	12 A	18 A	25 A	32 A	40 A
	440 V	9 A	9 A	12 A	16 A	32 A	37 A
	500 V	9 A	9 A	12 A	14 A	28 A	33 A
	690 V	7 A	7 A	9 A	10 A	21 A	25 A
Rated operational power AC-3 (1)							
M 3~ 1500 r.p.m. 50 Hz 1800 r.p.m. 60 Hz 3-phase motors	220-230-240 V	2.2 kW	3 kW	4 kW	6.5 kW	9 kW	11 kW
	380-400 V	4 kW	5.5 kW	7.5 kW	11 kW	15 kW	18.5 kW
	415 V	4 kW	5.5 kW	9 kW	11 kW	15 kW	18.5 kW
	440 V	4 kW	4 kW	5.5 kW	9 kW	18.5 kW	22 kW
	500 V	5.5 kW	5.5 kW	7.5 kW	9 kW	18.5 kW	22 kW
	690 V	5.5 kW	5.5 kW	7.5 kW	9 kW	18.5 kW	22 kW
Rated making capacity AC-3		10 x Ie AC-3 acc. to IEC 60947-4-1					
Rated breaking capacity AC-3		8 x Ie AC-3 acc. to IEC 60947-4-1					
AC-8a Utilization category							
(without thermal overload relay - Ue 400 V 50/60 Hz - θ ≤ 40 °C)							
Ie / Rated operational current AC-8a		12 A	16 A	22 A	30 A	40 A	50 A
Rated operational power AC-8a		5.5 kW	7.5 kW	11 kW	15 kW	20 kW	25 kW
Short-circuit protection device for contactors							
without thermal overload relay - Motor protection excluded (2)							
Ue ≤ 500 V AC - gG type fuse		25 A	25 A	32 A	32 A	63 A	63 A
Rated short-time withstand current Icw	1 s	250 A	280 A	300 A	300 A	600 A	600 A
at 40 °C ambient temperature,	10 s	100 A	120 A	145 A	200 A	400 A	400 A
in free air from a cold state	30 s	60 A	70 A	80 A	105 A	225 A	225 A
	1 min	50 A	55 A	60 A	85 A	150 A	150 A
	15 min	26 A	26 A	28 A	32 A	65 A	65 A
Maximum breaking capacity							
cos ϕ = 0.45	at 440 V	250 A	250 A	250 A	250 A	820 A	820 A
	at 690 V	90 A	90 A	90 A	90 A	340 A	340 A
Power dissipation per pole	Ie / AC-1	0.8 W	0.8 W	1 W	1.2 W	2.5 W	3 W
	Ie / AC-3	0.1 W	0.1 W	0.2 W	0.35 W	0.9 W	1.3 W
Max. electrical switching frequency	AC-1	600 cycle/h					
	AC-3	1200 cycle/h					
Mechanical durability							
Number of operating cycles		10 millions operating cycles					
Max. switching frequency		3600 cycles/h					

(1) For the corresponding kW/A values of 1500 r.p.m, 50 Hz or 1800 r.p.m, 60 Hz, 3-phase motors, see "Motor rated operational powers and currents".
(2) For the protection of motor starters against short circuits, see "Coordination with short-circuit protection devices".

1SBC100008S0201 - revA

AX50 ... AX150 3-pole contactors

Technical data

Main pole - Utilization characteristics according to IEC

Contactor types	AC operated	AX50	AX65	AX80	AX95	AX115	AX150
Standards		IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1					
Rated operational voltage Ue max.		690 V			1000 V		
Rated frequency (without derating)		50 / 60 Hz					
Conventional free-air thermal current Ith							
acc. to IEC 60947-4-1, open contactors, θ ≤ 40 °C		100 A	125 A	125 A	145 A	160 A	190 A
With conductor cross-sectional area		35 mm²	50 mm²	50 mm²	50 mm²	70 mm²	95 mm²
AC-1 Utilization category							
For air temperature close to contactor							
Ie / Rated operational current AC-1	θ ≤ 40 °C	100 A	115 A	125 A	145 A	160 A	190 A
Ue max. ≤ 690 V, 50/60 Hz	θ ≤ 55 °C	85 A	95 A	105 A	135 A	145 A	145 A
	θ ≤ 70 °C	70 A	80 A	85 A	115 A	130 A	130 A
With conductor cross-sectional area		35 mm²	50 mm²	50 mm²	50 mm²	70 mm²	95 mm²
AC-3 Utilization category							
For air temperature close to contactor θ ≤ 55 °C							
Ie / Max. rated operational current AC-3 (1)							
3-phase motors	220-230-240 V	53 A	65 A	80 A	96 A	115 A	150 A
	380-400 V	50 A	65 A	80 A	96 A	115 A	150 A
	415 V	50 A	65 A	80 A	96 A	115 A	150 A
	440 V	45 A	65 A	70 A	93 A	100 A	100 A
	500 V	45 A	55 A	65 A	80 A	100 A	100 A
	690 V	35 A	43 A	46 A	65 A	82 A	82 A
Rated operational power AC-3 (1)							
1500 r.p.m. 50 Hz	220-230-240 V	15 kW	18.5 kW	22 kW	25 kW	30 kW	45 kW
1800 r.p.m. 60 Hz	380-400 V	22 kW	30 kW	37 kW	45 kW	55 kW	75 kW
3-phase motors	415 V	25 kW	37 kW	40 kW	55 kW	59 kW	75 kW
	440 V	25 kW	37 kW	40 kW	55 kW	59 kW	59 kW
	500 V	30 kW	37 kW	45 kW	55 kW	59 kW	59 kW
	690 V	30 kW	37 kW	40 kW	55 kW	75 kW	75 kW
Rated making capacity AC-3		10 x Ie AC-3 acc. to IEC 60947-4-1					
Rated breaking capacity AC-3		8 x Ie AC-3 acc. to IEC 60947-4-1					
AC-8a Utilization category							
(without thermal overload relay - Ue 400 V 50/60 Hz - θ ≤ 40 °C)							
Ie / Rated operational current AC-8a		63 A	85 A	95 A	120 A	140 A	-
Rated operational power AC-8a		30 kW	45 kW	50 kW	59 kW	75 kW	-
Short-circuit protection device for contactors							
without thermal overload relay - Motor protection excluded (2)							
Ue ≤ 500 V AC - gG type fuse		100 A	125 A	160 A	160 A	200 A	315 A
Rated short-time withstand current Icw	1 s	1000 A	1000 A	1000 A	1320 A	1320 A	1320 A
at 40 °C ambient temperature,	10 s	650 A	650 A	650 A	800 A	800 A	800 A
in free air from a cold state	30 s	370 A	370 A	370 A	500 A	500 A	500 A
	1 min	250 A	250 A	250 A	350 A	350 A	350 A
	15 min	110 A	135 A	135 A	160 A	160 A	175 A
Maximum breaking capacity							
cos ϕ = 0.45	at 440 V	1300 A	1300 A	1300 A	1160 A	1160 A	1160 A
	at 690 V	630 A	630 A	630 A	800 A	800 A	800 A
Power dissipation per pole	Ie / AC-1	5 W	6.5 W	7 W	6.5 W	7.5 W	10.5 W
	Ie / AC-3	1.3 W	1.5 W	2.3 W	2.7 W	3.9 W	6.5 W
Max. electrical switching frequency	AC-1	600 cycle/h			300 cycles/h		
	AC-3	600 cycle/h			300 cycles/h		
Mechanical durability							
Number of operating cycles		10 millions operating cycles					
Max. switching frequency		3600 cycles/h					

(1) For the corresponding kW/A values of 1500 r.p.m, 50 Hz or 1800 r.p.m, 60 Hz, 3-phase motors, see "Motor rated operational powers and currents".
(2) For the protection of motor starters against short circuits, see "Coordination with short-circuit protection devices".

1SBC100219S0201-revA

AX09 ... AX40 3-pole contactors

Technical data

Main pole - Utilization characteristics according to UL / NEMA / CSA

Contactor types	AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Standards		UL 60947-4-1, CSA C22.2 NO. 60947-4-1-07					
Maximum operational voltage		600 V					
UL / CSA general use rating							
600 V AC		21 A	25 A	30 A	30 A	50 A	60 A
With conductor cross-sectional area		AWG 10	AWG 10	AWG 10	AWG 10	AWG 8	AWG 6
UL / CSA maximum 1-phase motor rating							
Full load current	120 V AC	9.8 A	13.8 A	16 A	24 A	34 A	34 A
	240 V AC	10 A	12 A	17 A	17 A	40 A	40 A
Horse power rating	120 V AC	1/2 hp	3/4 hp	1 hp	2 hp	3 hp	3 hp
	240 V AC	1.5 hp	2 hp	3 hp	3 hp	7.5 hp	7.5 hp
UL / CSA maximum 3-phase motor rating							
Full load current (1)	200-208 V AC	7.8 A	11 A	17.5 A	25.3 A	32.2 A	32.2 A
	220-240 V AC	6.8 A	9.6 A	15.2 A	22 A	28 A	42 A
	440-480 V AC	7.6 A	11 A	14 A	21 A	34 A	40 A
	550-600 V AC	9 A	11 A	17 A	17 A	32 A	41 A
Horse power rating (1)	200-208 V AC	2 hp	3 hp	5 hp	7.5 hp	10 hp	10 hp
	220-240 V AC	2 hp	3 hp	5 hp	7.5 hp	10 hp	15 hp
	440-480 V AC	5 hp	7.5 hp	10 hp	15 hp	25 hp	30 hp
	550-600 V AC	7.5 hp	10 hp	15 hp	15 hp	30 hp	40 hp
Short-circuit protection device for contactors without thermal overload relay - Motor protection excluded							
High fault current		100 kA	100 kA	100 kA	100 kA	100 kA	100 kA
Fuse rating		30 A	30 A	30 A	45 A	200 A	200 A
Fuse type, 600 V		J	J	J	J	J	J
Maximum electrical switching frequency							
For general use		600 cycles/h					
For motor use		1200 cycles/h					

(1) For the corresponding kW/A or hp/A values of 1500 r.p.m, 50 Hz or 1800 r.p.m, 60 Hz, 3-phase motors, see "Motor rated operational powers and currents".

1SBC100241S0201-revA

AX50 ... AX150 3-pole contactors

Technical data

Main pole - Utilization characteristics according to UL / NEMA / CSA

Contactor types	AC operated	AX50	AX65	AX80	AX95	AX115	AX150
Standards		UL 60947-4-1, CSA C22.2 NO. 60947-4-1-07			UL 508, CSA C22.2 N°14, UL 60947-1 / 60947-4-1A and CSA 60947-1 / 60947-4-1A		
Maximum operational voltage		600 V					
UL / CSA general use rating							
600 V AC		80 A	90 A	105 A	150 A	150 A	170 A
With conductor cross-sectional area		AWG 4	AWG 3	AWG 2	AWG 1	AWG 1/0	AWG 2/0
UL / CSA maximum 1-phase motor rating							
Full load current	120 V AC	34 A	56 A	80 A	–	–	–
	240 V AC	50 A	50 A	68 A	–	–	–
Horse power rating	120 V AC	3 hp	5 hp	7-1/2 hp	–	–	–
	240 V AC	10 hp	10 hp	15 hp	–	–	–
UL / CSA maximum 3-phase motor rating							
Full load current (1)	200-208 V AC	48.3 A	62.1 A	78.2 A	92 A	92 A	120 A
	220-240 V AC	54 A	68 A	80 A	80 A	104 A	130 A
	440-480 V AC	52 A	77 A	77 A	77 A	96 A	124 A
	550-600 V AC	52 A	77 A	77 A	77 A	99 A	125 A
Horse power rating (1)	200-208 V AC	15 hp	20 hp	25 hp	30 hp	30 hp	40 hp
	220-240 V AC	20 hp	25 hp	30 hp	30 hp	40 hp	50 hp
	440-480 V AC	40 hp	60 hp	60 hp	60 hp	75 hp	100 hp
	550-600 V AC	50 hp	75 hp	75 hp	75 hp	100 hp	125 hp
Short-circuit protection device for contactors without thermal overload relay - Motor protection excluded							
High fault current		100 kA	100 kA	100 kA	100 kA	100 kA	100 kA
Fuse rating		100 A	200 A	200 A	200 A	200 A	(2)
Fuse type, 600 V		J	J	J	J	J	(2)
Maximum electrical switching frequency							
For general use		600 cycles/h			300 cycles/h		
For motor use		600 cycles/h			300 cycles/h		

(1) For the corresponding kW/A or hp/A values of 1500 r.p.m, 50 Hz or 1800 r.p.m, 60 Hz, 3-phase motors, see "Motor rated operational powers and currents".
(2) In preparation.

1SBC100459S0201-revA

AX09 ... AX40 3-pole contactors

Technical data

General technical data

Contactor types		AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Rated insulation voltage Ui								
acc. to IS / IEC 60947-4-1			690 V					
acc. to UL / CSA			600 V					
Rated impulse withstand voltage Uimp.			6 kV					
Ambient air temperature close to contactor								
Operation	Fitted with thermal overload relay		-25...+55 °C (1)					
	Without thermal overload relay		-40...+70 °C					
Storage			-60...+80 °C					
Climatic withstand			acc. to IEC 60068-2-30 and 60068-2-11 - UTE C 63-100 specification II					
Maximum operating altitude (without derating)			3000 m					
Shock withstand								
acc. to IEC 60068-2-27 and EN 60068-2-27								
Mounting position 1								
		Shock direction	1/2 sinusoidal shock for 11 ms: no change in contact position, closed or open position					
		A	20 g					
		B1	10 g closed position / 5 g open position					
		B2	15 g					
		C1	20 g					
		C2	20 g					

(1) The max. operational current is 23 A for AX25 with TA25DU-25M.

Magnet system characteristics

Contactor types		AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Coil operating limits		AC supply	at θ ≤ 55 °C 0.85...1.1 x Uc					
acc. to IS / IEC 60947-4-1			Please also refer to "Mounting characteristics and conditions for use"					
AC control voltage 50/60 Hz								
Rated control circuit voltage Uc		at 50 Hz	24...440 V					
		at 60 Hz	24...440 V					
Coil consumption	Average pull-in value	50 Hz	70 VA				120 VA	
		60 Hz	80 VA				140 VA	
		50/60 Hz (1)	74 VA / 70 VA				125 VA / 120 VA	
	Average holding value	50 Hz	8 VA / 2 W				12 VA / 3 W	
		60 Hz	8 VA / 2 W				12 VA / 3 W	
		50/60 Hz (1)	8 VA / 2 W				12 VA / 3 W	
Drop-out voltage			approx. 40...65 % of Uc					
Operating time								
Between coil energization and:		N.O. contact closing	10...26 ms				8...21 ms	
		N.C. contact opening	7...21 ms				6...18 ms	
Between coil de-energization and:		N.O. contact opening	4...15 ms				4...11 ms	
		N.C. contact closing	9...20 ms				7...14 ms	

(1) 50/60 Hz coils: see "Coil voltage code table".

Mounting characteristics and conditions for use

Contactor types		AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Mounting positions			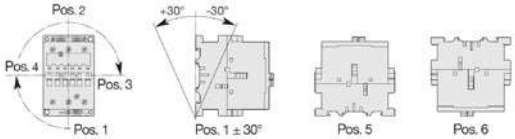 Max. N.O. or N.C. built-in and add-on N.O. or N.C. auxiliary contacts: see accessory fitting details for 3-pole contactor AX09 ... AX80					
Control voltage / Ambient temperature								
Mounting positions	1, 1±30°, 2, 3, 4, 5	at θ ≤ 55 °C	0.85...1.1 x Uc					
		at 55 °C < θ ≤ 70 °C	Uc					
	6	at θ ≤ 55 °C	0.95...1.1 x Uc					
		at θ > 55 °C	Unauthorized					
Mounting distances			The contactors can be assembled side by side					
Fixing								
On rail according to IEC 60715, EN 60715			35 x 7.5 mm or 35 x 15 mm					
By screws (not supplied)			2 x M4 screws placed diagonally					

1SBC100243S0201-revA

AX50 ... AX150 3-pole contactors

Technical data

General technical data

Contactor types	AC operated	AX50	AX65	AX80	AX95	AX115	AX150
Rated insulation voltage Ui							
acc. to IEC 60947-4-1		690 V			1000 V		
acc. to UL / CSA		600 V			–		
Rated impulse withstand voltage Uimp.		6 kV			8 kV		
Ambient air temperature close to contactor							
Operation	Fitted with thermal overload relay	-25...+55 °C (1)					
	Without thermal overload relay	-40...+70 °C					
Storage		-60...+80 °C			-40 to +70 °C		
Climatic withstand		acc. to IEC 60068-2-30 and 60068-2-11 - UTE C 63-100 specification II			acc. to IEC 60068-2-30		
Maximum operating altitude (without derating)		3000 m					
Shock withstand acc. to IEC 60068-2-27 and EN 60068-2-27 Mounting position 1							
	Shock direction	1/2 sinusoidal shock for 11 ms: no change in contact position, closed or open position (2)					
	A	20 g					
	B1	10 g closed position / 5 g open position					
	B2	15 g					
	C1	20 g					
	C2	20 g					

(1) The max. operational current is 74A for AX80 with TA75DU-80M.
(2) These values are not valid for rail mounting with contactors AX95 ... AX150.

Magnet system characteristics

Contactor types		AC operated	AX50	AX65	AX80	AX95	AX115	AX150
Coil operating limits acc. to IEC 60947-4-1		AC supply	at θ ≤ 55 °C 0.85...1.1 x Uc			At θ ≤ 70 °C 0.85 ... 1.1 x Uc		
			Please also refer to "Mounting characteristics and conditions for use"					
AC control voltage 50/60 Hz								
Rated control circuit voltage Uc		at 50 Hz	24...440 V					
		at 60 Hz	24...440 V					
Coil consumption	Average pull-in value	50 Hz	180 VA			350 VA		
		60 Hz	210 VA			450 VA		
		50/60 Hz (1)	190 VA / 180 VA			410 VA / 365 VA		
	Average holding value	50 Hz	18 VA / 5.5 W			22 VA / 6.5 W		
		60 Hz	18 VA / 5.5 W			26 VA / 8 W		
		50/60 Hz (1)	18 VA / 5.5 W			27 VA / 7.5 W		
Drop-out voltage			approx. 40...65 % of Uc					
Operating time								
Between coil energization and:		N.O. contact closing	8...27 ms			10...25 ms		
		N.C. contact opening	7...22 ms			7...22 ms		
Between coil de-energization and:		N.O. contact opening	4...11 ms			7...15 ms		
		N.C. contact closing	7...14 ms			10...18 ms		

(1) 50/60 Hz coils: see "Coil voltage code table".

Mounting characteristics and conditions for use

Contactor types		AC operated	AX50	AX65	AX80	AX95	AX115	AX150
Mounting positions			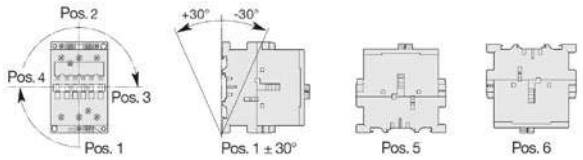					
			Add on max. N.O. or N.C. auxiliary contacts: see accessory fitting details for 3-pole contactor AX50 ... AX150					
Control voltage / Ambient temperature								
Mounting positions	1, 1±30°, 2, 3, 4, 5	at θ ≤ 55 °C	0.85...1.1 x Uc					
		at 55 °C≤ θ ≤ 70 °C	Uc			0.85...1.1 x Uc		
	6	at θ ≤ 55 °C	0.95...1.1 x Uc					
		at θ ≤ 55 °C	Unauthorized					
Mounting distances			The contactors can be assembled side by side					
Fixing								
On rail according to IEC 60715, EN 60715			35 x 15 mm or 75 x 25 mm			-		
By screws (not supplied)			2 x M6 screws placed diagonally			2 x M6 screws placed diagonally		

1SBC100220S0201-revA

AX09 ... AX40 3-pole contactors

Technical data

Connecting characteristics

Contactor types	AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Main terminals		 Screw terminals with cable clamp				 Screw terminals with double connector 2 x (5.6 x 6.5 mm)	
Connection capacity (min. ... max.)							
Main conductors (poles)							
Rigid Solid (≤ 4 mm²)	1 x	1...4 mm²			1...6 mm²	2.5...16 mm²	
Rigid Stranded (≥ 6 mm²)	2 x	1...4 mm²			1...6 mm²	2.5...16 mm²	
Flexible with non insulated ferrule	1 x	0.75...2.5 mm²			0.75...4 mm²	2.5...10 mm²	
	2 x	0.75...2.5 mm²			0.75...4 mm²	2.5...10 mm²	
Flexible with insulated ferrule	1 x	-			0.75...4 mm²	2.5...10 mm²	
	2 x	-			0.75...2.5 mm²	2.5...10 mm²	
Bars or lugs	L <	7.7 mm			9.6 mm	-	
	l >	3.7 mm			3.7 mm	-	
Connection capacity acc. to UL/CSA	1 or 2 x	AWG 8...1			AWG 16...10	AWG 8...4	
Stripping length		10 mm				14 mm	
Tightening torque		1 Nm / 9 lb.in			1.2 Nm / 11 lb.in	2.3 Nm / 20 lb.in	
Auxiliary conductors (built-in auxiliary terminals + coil terminals)							
Rigid solid	1 x	1...4 mm²					
	2 x	1...4 mm²					
Flexible with non insulated ferrule	1 x	0.75...2.5 mm²					
	2 x	0.75...2.5 mm²					
Lugs	L <	7.7 mm				8 mm	
	l >	3.7 mm				3.7 mm	
Connection capacity acc. to UL/CSA	1 or 2 x	AWG 18...14					
Stripping length		10 mm					
Tightening torque							
Coil terminals		1 Nm / 9 lb.in					
Built-in auxiliary terminals		1 Nm / 9 lb.in					
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529							
Main terminals		IP20 (only front side)					
Coil terminals		IP20				IP20	
Built-in auxiliary terminals		IP20 (only front side)				IP20	
Screw terminals		Delivered in open position, screws of unused terminals must be tightened					
Main terminals		M3.5				M5	
Screwdriver type		Flat Ø 5.5 / Pozidriv 2				Flat Ø 6.5 / Pozidriv 2	
Coil terminals		M3.5					
Screwdriver type		Flat Ø 5.5 / Pozidriv 2					
Built-in auxiliary terminals		M3.5					
Screwdriver type		Flat Ø 5.5 / Pozidriv 2					

1SBC100014S0201-revA

AX50 ... AX150 3-pole contactors

Technical data

Connecting characteristics

Contactor types	AC operated		AX50	AX65	AX80	AX95	AX115	AX150
Main terminals			 Screw terminals with single connector (13 x 10 mm)			 Screw terminals with single connector (14 x 14 mm)		
Connection capacity (min. ... max.)								
Main conductors (poles)								
Rigid	Solid (≤ 4 mm²)	1 x	6...50 mm²			10...95 mm²		
	Stranded (≥ 6 mm²)	2 x	6...25 mm²			6...35 mm²		
Flexible with ferrule		1 x	6...35 mm²			10...70 mm² (1)		
		2 x	6...16 mm²			6...35 mm² (1)		
Flexible with insulated ferrule		1 x	6...35 mm²			10...70 mm² (1)		
		2 x	6...16 mm²			6...35 mm² (1)		
Bars or lugs		L <	-			30 mm (2)		
		I >	-			6 mm		
Connection capacity acc. to UL / CSA			AWG 8 ... 1			AWG 6 ... 2/0		
Stripping length			16 mm			9 mm		
Tightening torque	Recommended		4.00 Nm / 35 lb.in			8 Nm / 71 lb.in		
	Max.		4.50 Nm			9 Nm		
Auxiliary conductors (built-in auxiliary terminals + coil terminals)								
Rigid solid		1 x	1....4 mm²			0.75...2.5 mm²		
		2 x	1....4 mm²			0.75...2.5 mm²		
Flexible with ferrule		1 x	1...2.5 mm²			0.75...2.5 mm²		
		2 x	0.75...2.5 mm²					
Lugs		L <	8 mm²					
		I >	3.7 mm²					
Connection capacity acc. to UL / CSA		1 or 2x	AWG 18 ... 14			AWG 18 ... 14		
Stripping length								
Coil terminals			9 mm			9 mm		
Built-in auxiliary terminals			10 mm					
Tightening torque								
Coil terminals	Recommended		1 Nm / 9 lb.in					
	Max.		1.2 Nm					
Built-in auxiliary terminals	Recommended		-					
	Max.		-					
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529								
Main terminals			IP10					
Coil terminals			IP20					
Built-in auxiliary terminals			-					
Screw terminals			Delivered in open position, screws of unused terminals must be tightened					
Main terminals			M6			M8		
	Screwdriver type		Flat Ø 6.5 / Pozidriv 2			Hexagon socket (s = 4 mm)		
Coil terminals			M3.5					
	Screwdriver type		Flat Ø 5.5 / Pozidriv 2					
Built-in auxiliary terminals			-					
	Screwdriver type		-					

(1) AX95 -AX150: use flexible without ferrule.
(2) With LW110 enlargement piece, see "Accessories".

1SBC100214S0201-revA

AX09 ... AX40 3-pole contactors

Technical data

Built-in auxiliary contacts according to IEC - Other auxiliary contacts see "Accessories"

Contactor types	AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Rated operational voltage Ue max.		690 V					
Rated frequency (without derating)		50 / 60 Hz					
Conventional free air thermal current Ith - θ ≤ 40 °C		16 A					
Ie / Rated operational current AC-15 acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A					
	220-240 V 50/60 Hz	4 A					
	380-440 V 50/60 Hz	3 A					
	500 V 50/60 Hz	2 A					
	690 V 50/60 Hz	2 A					
Making capacity AC-15		10 x Ie AC-15 acc. to IEC 60947-5-1					
Breaking capacity AC-15		10 x Ie AC-15 acc. to IEC 60947-5-1					
Ie / Rated operational current DC-13 acc. to IEC 60947-5-1	24 V DC	6 A / 144 W					
	48 V DC	2.8 A / 134 W					
	72 V DC	2 A / 144 W					
	110 V DC	1.1 A / 121 W					
	125 V DC	1.1 A / 138 W					
	220 V DC	0.55 A / 121 W					
	250 V DC	0.55 A / 138 W					
Short-circuit protection device gG type fuse		10 A					
Rated short-time withstand current Icw	for 1.0 s	100 A					
	for 0.1 s	140 A					
Minimum switching capacity with failure rate acc. to IEC 60947-5-4		12 V / 3 mA					
Non-overlapping time between N.O. and N.C. contacts		≥ 2 ms					
Power dissipation per pole at 6 A		0.1 W					
Max. electrical switching frequency	AC-15	1200 cycles/h					
	DC-13	900 cycles/h					
Mechanically linked contacts acc. to annex L of IEC 60947-5-1		Built-in N.O. or N.C. auxiliary contacts and additional N.O. or N.C. auxiliary contacts of 4-pole CA5X are mechanically linked contacts.					
Mirror contacts acc. to annex F of IEC 60947-4-1		Built-in N.C. auxiliary contacts or additional N.C. auxiliary contacts (CA5X, CAL5X-11) are mirror contacts.					

Built-in auxiliary contacts according to UL / CSA

Contactor types	AC operated	AX09	AX12	AX18	AX25	AX32	AX40
Max. operational voltage		600 V AC, 600 V DC					
Pilot duty		A600, P300					
AC thermal rated current		10 A					
AC maximum volt-ampere making		7200 VA					
AC maximum volt-ampere breaking		720 VA					
DC thermal rated current		5 A					
DC maximum volt-ampere making-breaking		138 VA					

1SBC100016S0201-revA

AX09 ... AX80 contactors

DC circuit switching

General

- The arc switching on DC is more difficult than on AC.
- For selecting a contactor it is essential to determine the current, the voltage and the L/R time constant of the controlled load.
- For information, typical time constant values are quoted hereafter: non inductive loads such as resistance furnaces (L/R ≈ 1 ms), inductive loads such as shunt motors (L/R ≈ 2 ms) or series motors (L/R ≈ 7.5 ms).
- The addition of a resistor in parallel with an inductive winding helps in the elimination of the arcs.
- All the poles required for breaking must be connected in series between the load and the source polarity not linked to earth (or chassis).

Technical data

- The tables indicate for the standard contactors the Ie max. operating currents depending on: the utilization category (i.e. L/R) DC-1, DC-3, DC-5 as defined in the IEC 60947-4-1 publication, the operating voltage Ue and the pole coupling details.
- Ampere values quoted in these tables are valid for a -25...+70 °C temperature close to the contactors, as long as these values do not exceed the AC-1 Ampere values for the corresponding ambient temperature.
- Max. switching frequency: 300 cycles/h.

Selection table

Contactor types		AX09	AX12	AX18	AX25	AX32	AX40	AX50	AX65	AX80
Utilization category DC-1, L/R ≤ 1 ms										
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	8	10	15	20	-	-	-	-	-
	220 V	-	-	-	-	-	-	-	-	-
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	22	25	27	30	50	60	100	110	120
	220 V	8	10	15	20	-	-	-	-	-
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	22	25	27	30	50	60	100	110	120
	220 V	22	25	27	30	50	60	100	110	120
Utilization category DC-3, L/R ≤ 2 ms										
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	5	6	7	8	-	-	-	-	-
	220 V	-	-	-	-	-	-	-	-	-
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	22	25	27	30	50	60	100	110	120
	220 V	5	6	7	8	-	-	-	-	-
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	22	25	27	30	50	60	100	110	120
	220 V	22	25	27	30	50	60	100	110	120
Utilization category DC-5, L/R ≤ 7.5 ms										
	≤ 72 V	7	9	12	16	30	40	50	63	75
	110 V	3	4	4	4	-	-	-	-	-
	220 V	-	-	-	-	-	-	-	-	-
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	8	10	15	20	45	50	80	90	100
	220 V	3	4	4	4					
	≤ 72 V	22	25	27	30	50	60	100	110	120
	110 V	22	25	27	30	50	60	100	110	120
	220 V	7	9	12	16	30	40	50	63	75

1SBC100496502O1

3-pole contactors

Electrical durability and utilization categories

General

Utilization categories determine the current making and breaking conditions relating to the characteristics of the loads to be controlled by the contactors. International standard IEC 60947-4-1 and European standard EN 60947-4-1 are the standards to be referred to.

If Ic is the current to be broken by the contactor and Ie the rated operational current normally drawn by the load, then:

- Categories AC-1 and AC-3: ..... Ic = Ie
- Category AC-2: ..... Ic = 2.5 x Ie
- Category AC-4: ..... Ic = 6 x Ie

Generally speaking Ic = m x Ie where m is a multiple of the load operational current.

On next pages, the curves corresponding to categories AC-1, AC-3 and AC-4 represent the electrical durability variation of standard contactors in relation to the breaking current Ic.

Electrical durability is expressed in millions of operating cycles.

Curve utilization mode

Electrical durability forecast and contactor selection for categories AC-1, AC-2, AC-3 or AC-4

- Note the characteristics of the load to be controlled:
  - Operational voltage ..... Ue
  - Current normally drawn ..... Ie (Ue / Ie / kW relation for motors, see "Motor rated operational powers and currents").
  - Utilization category ..... AC-1, AC-2, AC-3 or AC-4
  - Breaking current ..... Ic = Ie for AC-1 and for AC-3 ; Ic = 2.5 x Ie for AC-2 ; Ic = 6 x Ie for AC-4
- Define the number of operating cycles N required.
- On the diagram corresponding to the operational category, select the contactor with the curve immediately above the intersection point (Ic ; N).

Electrical durability forecast and contactor selection for mixed duty motor control: AC-3 (Ic = Ie) type switching off while "motor running" and, occasionally, AC-4 (Ic = 6 x Ie) type switching off while "motor accelerating"

- Note the characteristics of the motor to be controlled:
  - Operational voltage ..... Ue
  - Current normally drawn while "motor running" ..... Ie (Ue / Ie / kW relation for motors, see "Motor rated operational powers and currents")
  - Breaking current for AC-3 ..... Ic = Ie
  - Breaking current for AC-4 while "motor accelerating"..... Ic = 6 x Ie
  - Percentage of AC-4 operating cycles ..... K (on the basis of the total number of operating cycles)
- Define the total number of operating cycles N required.
- Note the smallest contactor rating compatible for AC-3 (Ue / Ie) on Main pole utilization characteristic table (see “Technical data”).
- For the selected contactor make a note of the following in relation to the voltage using diagram AC-3 in next pages:
  - The number of operating cycles A for Ic = Ie (AC-3)
  - The number of operating cycles B for Ic = 6 x Ie (AC-4)
- Calculate the estimated number of cycles N’ (N’ is always below A)

$$N' = \frac{A}{1 + 0.01\,K\,(A/B - 1)}$$

- If N' is too low in relation to the target N, calculate the estimated number of cycles for a higher contactor rating.

Case of uninterrupted duty

For uninterrupted duty, some verifications of preventing maintenance are necessary to check the functionality of the concerned product (consult us).

The combined effect of environmental conditions and the proper temperature of the product may require some disposals.

As a matter of fact, for this duty, the use duration prevails over the number of operating cycles.

1SBC101314S0201

3-pole contactors

Electrical durability

Electrical durability for AC-1 utilization category - Ue ≤ 690 V

Switching non-inductive or slightly inductive loads. The breaking current Ic for AC-1 is equal to the rated operational current of the load.

Ambient temperature and maximum electrical switching frequency: see "Technical data".

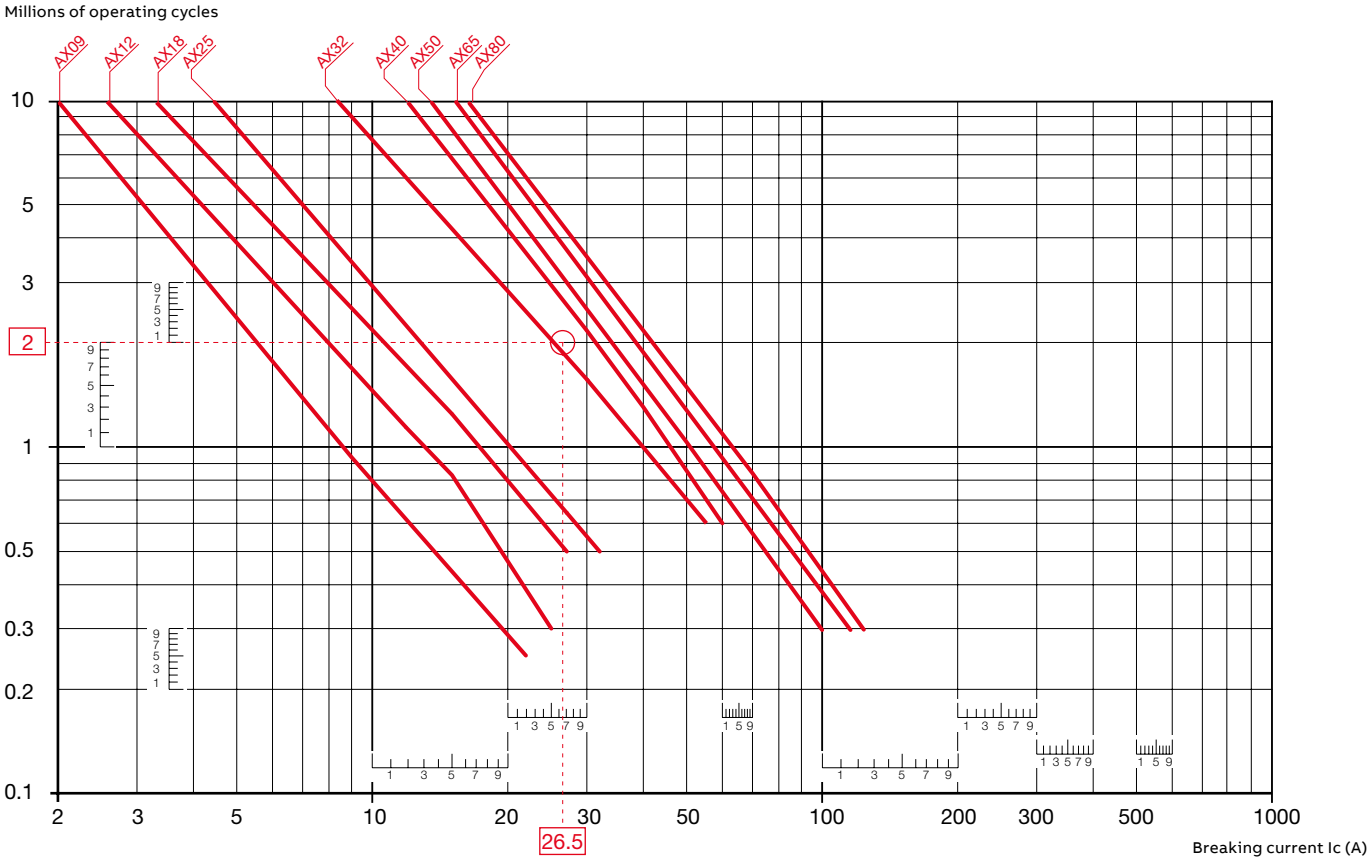

Example:

Ic / AC-1 = 26.5 A – Electrical durability required = 2 millions operating cycles.

Using the AC-1 curves above select the AX32 contactor at intersection "○" (26.5 A / 2 millions operating cycles).

1SFC101320C0201-revA

3-pole contactors

Electrical durability

Electrical durability for AC-3 utilization category - Ue ≤ 440 V.
Switching cage motors: starting and switching off running motors. The breaking current Ic for AC-3 is equal to the rated operational current Ie (Ie = motor full load current).
Ambient temperature and maximum electrical switching frequency: see "Technical data".

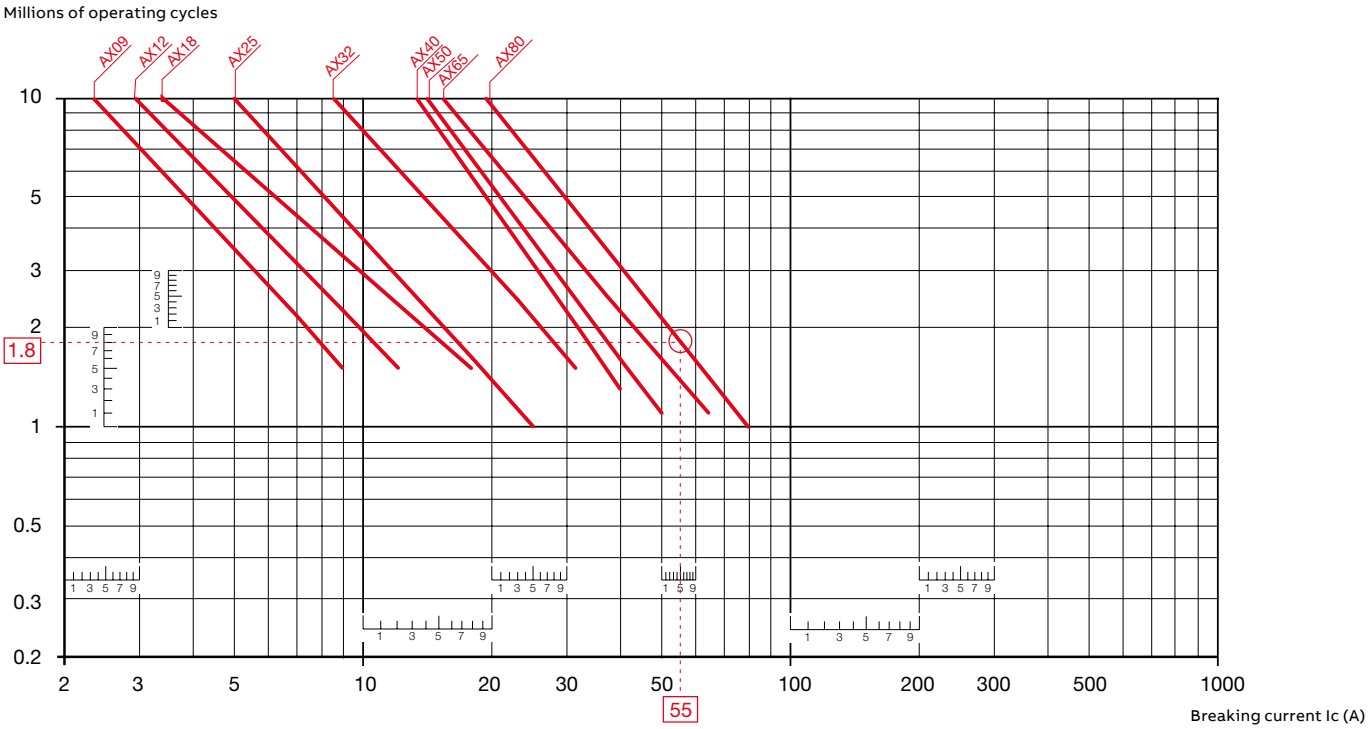

Example:
Motor power 30 kW for AC-3 - Ue = 400 V and Ie = 55 A utilization – Electrical durability required = 1.8 million operating cycles.
For AC-3: Ic = Ie. Select the AX80 contactor at intersection "○" (55 A / 1.8 million operating cycles) on the curves (AC-3 - Ue ≤ 440 V).

1SFC101321C0201-revA

3-pole contactors
Electrical durability

Electrical durability for AC-4 utilization category - Ue ≤ 440 V
Ambient temperature ≤ 55 °C
Switching cage motors: starting, reverse operation and step-by-step operation. The breaking current Ic is equal to 6 x Ie for AC-4, keeping in mind that Ie is the motor rated operational current (Ie = motor full-load current).
Maximum electrical switching frequency: see "Technical data".

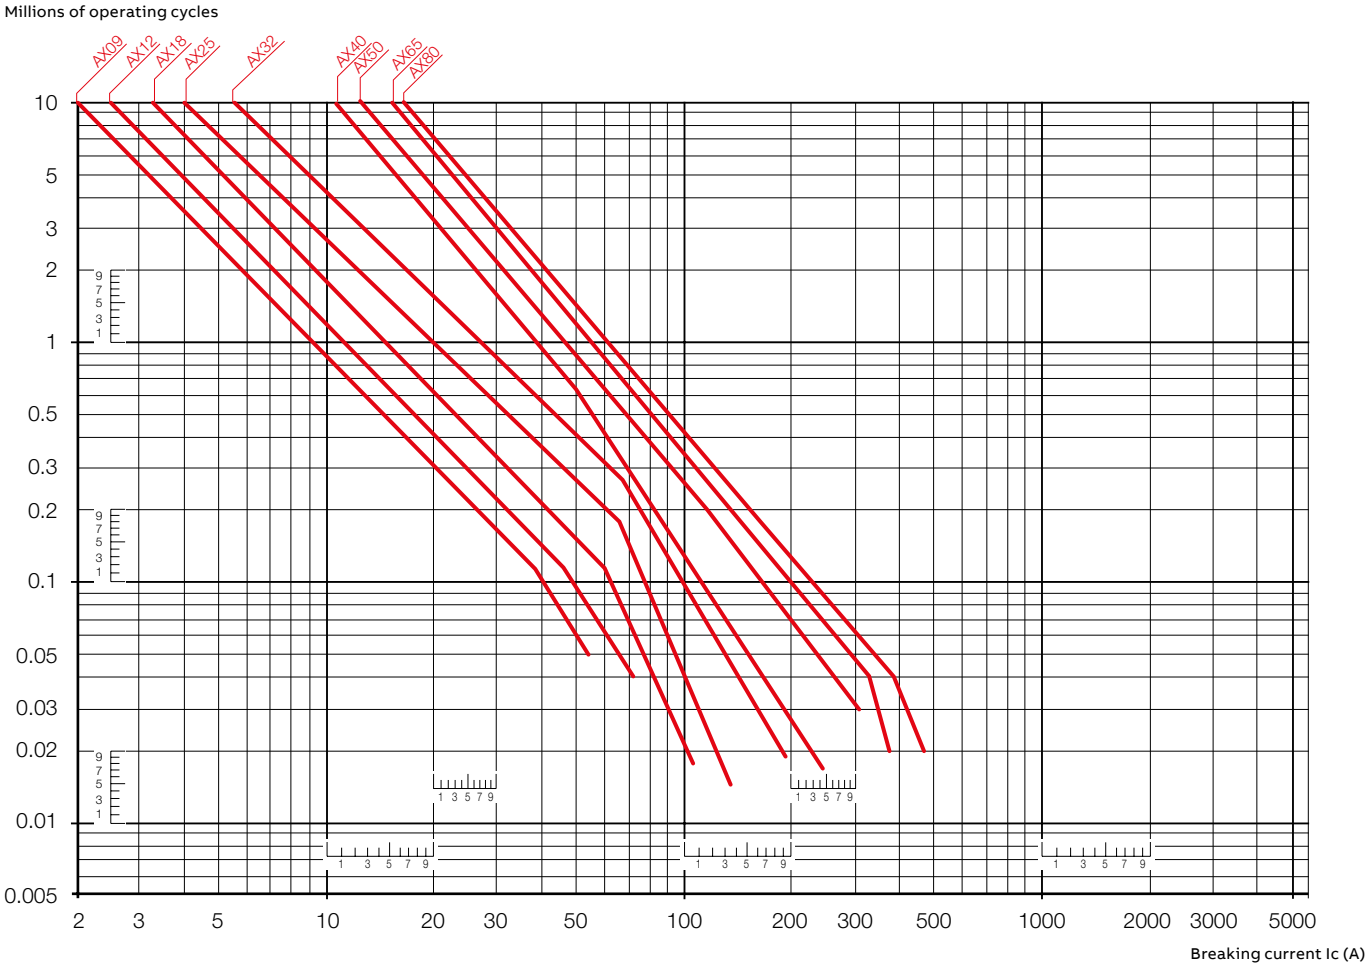

Star-delta starting of three-phase asynchronous motors

Contactor selection

General

Star-delta starting is the most common method to reduce the starting current of a motor. This system can be used on all the squirrel cage motors, which are normally used in delta connection.
In this type of starting, it is recommended to choose motors having high starting torque i.e. much higher than the resistive torque in order to reach sufficient high speed when the motor is connected in star.

Star-delta starting

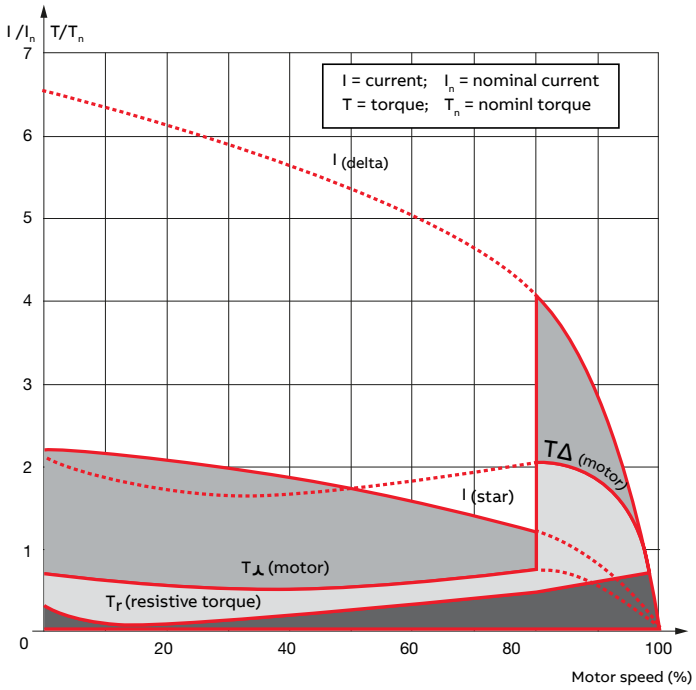

Technical Data
When starting:
inrush current is reduced to a third of direct starting current
motor torque is reduced to a third or even less of direct starting torque.
Transient current is generated when switching from star to delta connection.

Utilization
During the initial starting phase ("star" connection), the resistive torque of the driven load must remain, irrespective of speed, less than the "star" motor torque until "star-delta" switching occurs.
This starting mode is therefore ideal for machines having high starting torque such as:

- pumps
- centrifugal compressors
- wood-working machines, etc.

In order to prevent a high current peak, at least 85% of nominal speed must be reached before switching from star to delta.

Precautions
Motor nominal voltage in delta connection must be equal to that of the mains.
Example:
A motor for 415 V star-delta starting must be designed for 415 V in "delta" connection. Its usual designation is "415 V / 690 V motor". The motor must be constructed with 6 terminal windings.

Sequence
Starting is a three-stage process:
1st stage - "Star" connection
Press the "On" button on the control circuit to close the KM2 "star" contactor. The KM1 "line" contactor then closes and the motor starts. Countdown of programmed starting time (normally 6 to 16 s) then begins.
2nd stage - "Star" to "Delta" switching
When the programmed starting time is over, the KM2 "star" contactor opens.
3rd stage - "Delta" connection
A transition time (or dwelling time) of 50 ms is fixed between opening of the "star" contactor and closing of the "delta" contactor by the use of CT-SDS timer. This prevents short circuit between "star" and "delta".

Note: An electrical interlock between star and delta is mandatory such as VE 5 or through auxiliary contacts.
Furthermore, in open transition, the current interruption may reach up to 95 ms: it shall be checked that this duration is compatible with the application i.e. mainly if the decreasing in rotation speed is acceptable during the starting phase.

1SBC101882S0201-revA

Star-delta starting of three-phase asynchronous motors

Contactor selection

Rated operational power - AC-3									Max. starting time from cold state (1) seconds	Line contactor	Delta contactor	Star contactor	Overload relay (2)	Timer
220-230 V kW	240 V kW	380 V kW	400 V kW	415 V kW	440 V kW	500 V kW	660 V kW	690 V kW						
7.5	9	15	15	15	11	11	11	11	15	AX18	AX18	AX12	TA25DU M	CT-SDS.22S
11	11	22	22	22	15	15	15	15	15	AX25	AX25	AX18	TA25DU M	CT-SDS.22S
15	15	25	30	30	30	30	30	30	15	AX32	AX32	AX25	TA42DU M	CT-SDS.22S
18.5	22	37	37	37	37	37	37	37	30	AX40	AX40	AX32	TA42DU M	CT-SDS.22S
25	30	45	45	45	45	55	55	55	30	AX50	AX50	AX32	TA75DU M	CT-SDS.22S
30	37	55	55	55	55	55	55	55	30	AX65	AX65	AX40	TA75DU M	CT-SDS.22S
37	45	55	75	75	75	75	75	75	30	AX80	AX80	AX50	TA75DU M	CT-SDS.22S
45	55	75	90	90	90	90	90	90	20	AX95	AX95	AX65	TA110DU-M	CT-SDS.22S
55	55	90	110	110	110	110	132	132	20	AX115	AX115	AX80	TA110DU-M	CT-SDS.22S
75	75	132	132	132	110	110	132	132	20	AX150	AX150	AX95	TA110DU-M	CT-SDS.22S

(1) Usual time value = 6...16 s.
(2) The setting current value is : nominal motor current x 0.58



CT-SDS...

Ordering details - Electronic timer

Timing function	Time ranges	Ouput	Rated control supply voltage	Type	Order code	Pkg qty	Weight (1 pce) kg
Star-delta change-over (3)	7 (0.05 s - 10 min)	2 n/o contacts, 3 LEDs	28-48 V DC 24-240 V AC	CT-SDS.22S	1SVR730210R3300	1	0.114
			380-440 V AC	CT-SDS.23S	1SVR730211R2300	1	0.118
ON-delay (4)	10 (0.05 s - 300h)	2 c/o SPDT contacts	24-240 V AC/DC	CT-ERS.21S	1SVR730100R0300	1	0.152

(3) 50 ms transition time
(4) No transition time

Power circuit diagram

AX09 ... AX150 contactors

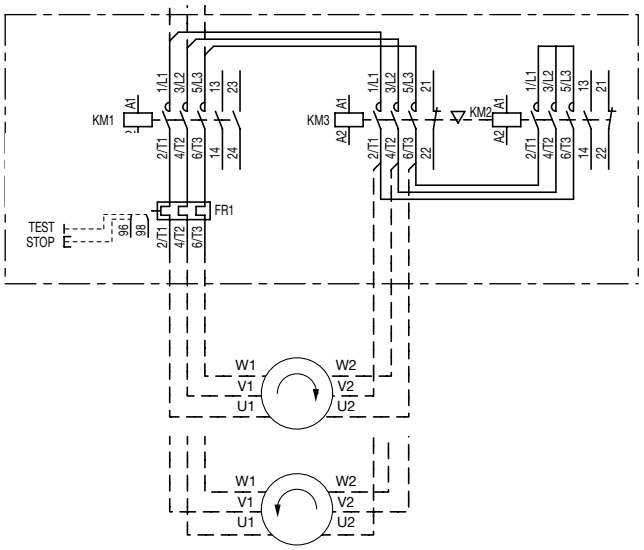

Control circuit diagrams - Remote control

AX09 ... AX150 contactors

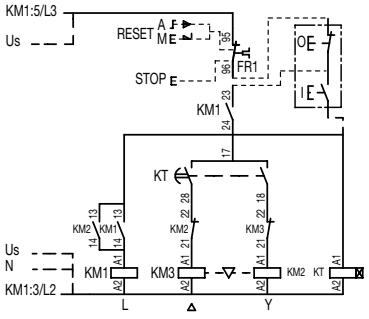

1SBC100179S0201-revA

AX09 ... AX150 3-pole contactors

Terminal marking and positioning

AX09 ... AX150 contactors - AC operated

Standard devices without addition of auxiliary contacts









Standard devices with factory mounted auxiliary contacts





Other possible contact combinations with auxiliary contacts added by the user

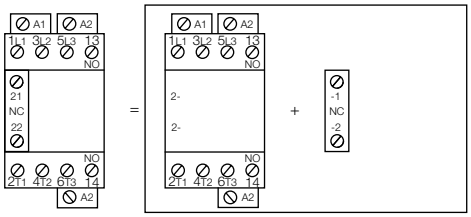

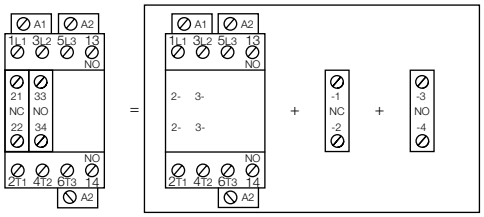



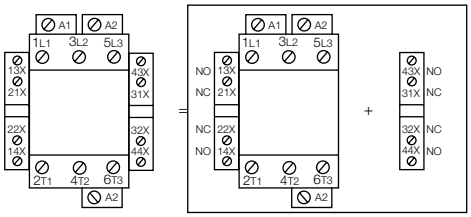

AX09 ... AX40 3-pole contactors

Dimensions

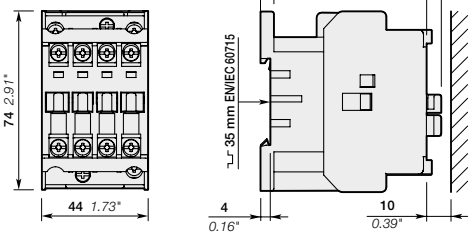

AX09, AX12, AX18, NX



AX25

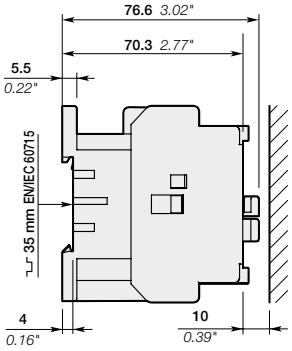



AX09, AX12, AX18, AX25, NX

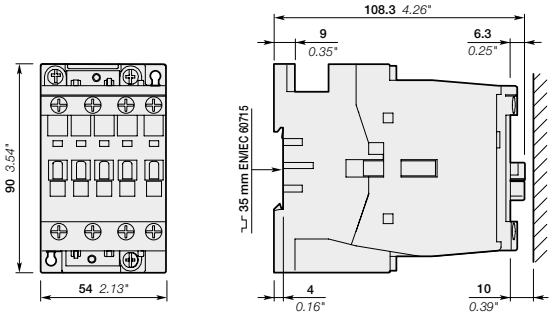

AX32, AX40



AX32, AX40

Main dimensions mm, inches

1SBC100222S0201-revA

AX50 ... AX150 3-pole contactors

Dimensions

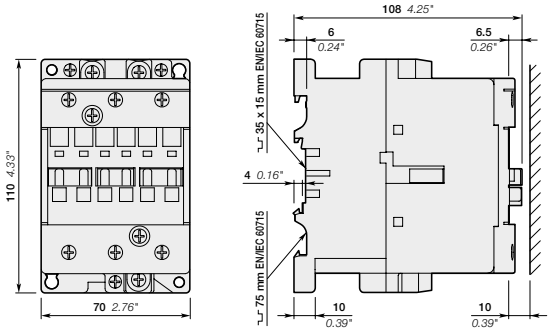

AX50, AX65, AX80



AX50, AX65, AX80

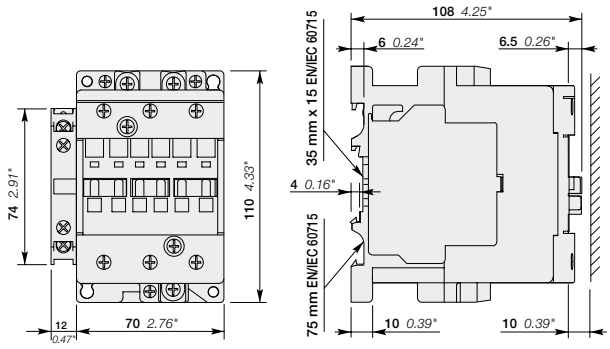

AX50, AX65, AX80 + CAL5X-11



AX50, AX65, AX80 + CAL5X-11

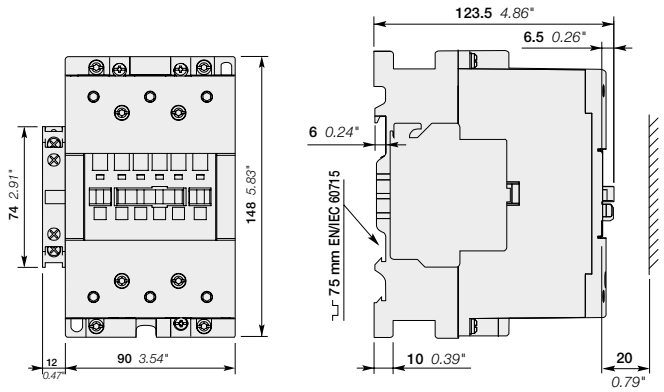

AX95, AX115, AX150 + CAL18X-11

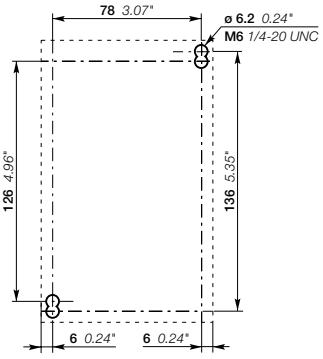

AX95, AX115, AX150 + CAL18X-11

Main dimensions mm, inches

1SBC100225O201-revA

NX contactor relays

Ordering details

NX contactor relays
58 AC operated
59 Main accessories

60 **Technical data**

62 **Terminal marking and positioning**

85 **Voltage code table**

NX contactor relays

AC operated



NX40E

NX contactor relays are used for switching auxiliary circuits and control circuits.

These contactor relays are of the block type design with:

- 4 poles. Contactor relays have mechanically linked auxiliary contact elements
- control circuit: AC operated
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Number of contacts	Rated control circuit voltage Uc (1)		Type	Order code	Weight (1 pce)
	V 50 Hz	V 60 Hz			kg
	24	24	NX22E-81	1SBH901074R8122	0.340
	105	110...127	NX22E-26	1SBH901074R2622	0.340
	200	200...220	NX22E-75	1SBH901074R7522	0.340
	380...400	400...415	NX22E-85	1SBH901074R8522	0.340
	24	24	NX31E-81	1SBH901074R8131	0.340
	105	110...127	NX31E-26	1SBH901074R2631	0.340
	200	200...220	NX31E-75	1SBH901074R7531	0.340
	380...400	400...415	NX31E-85	1SBH901074R8531	0.340
	24	24	NX40E-81	1SBH901074R8140	0.340
	105	110...127	NX40E-26	1SBH901074R2640	0.340
	200	200...220	NX40E-75	1SBH901074R7540	0.340
	380...400	400...415	NX40E-85	1SBH901074R8540	0.340

(1) For other voltage version see voltage code table.

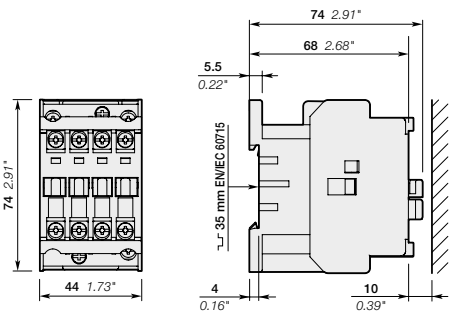

NX22E, NX31E, NX40E

Main dimensions mm, inches

1SBC100460S0201-revA

NX contactor relays
Main accessories

Contactor relay and main accessories (other accessories available)

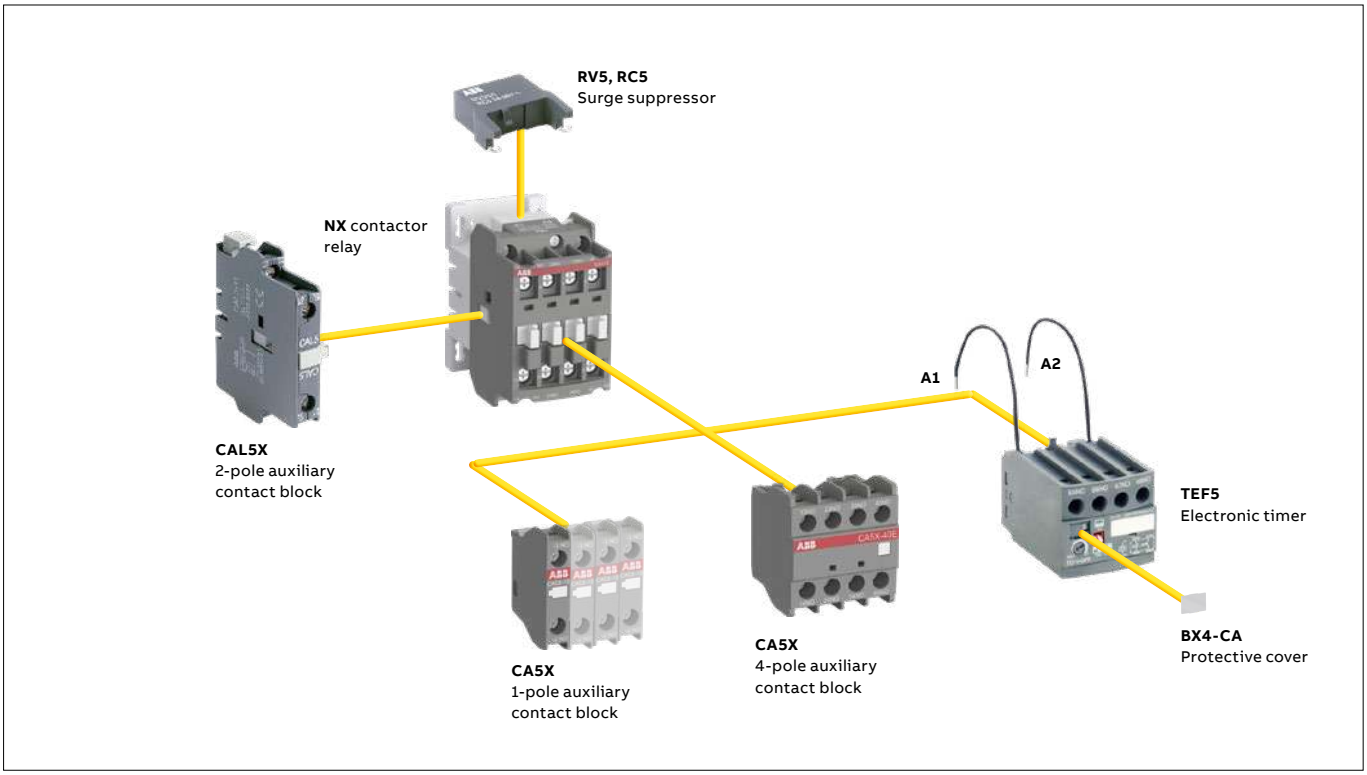

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

Contactor types	Main poles	Front-mounted accessories						Side-mounted accessories
		Auxiliary contact blocks				Electronic timer		Auxiliary contact blocks
		1-pole CA5X		4-pole CA5X		TEF5		2-pole CAL5X-11
NX	2 2 E (1)	1 to 4 x CA5X (or 1 x CE5) (2)	or	1 x CA5X (4-pole)	or	1 x TEF5	+	1 to 2 x CAL5X-11
	3 1 E (1) 4 0 E	1 to 4 x CA5X (1 to 2 x CE5 max) (3)	or	1 x CA5X (4-pole)	or	1 x TEF5	+	1 to 2 x CAL5X-11

(1) 2 N.C. front mounted auxiliary contacts maximum in mounting position 5.
(2) CE5 auxiliary contacts not allowed in mounting position 5.
(3) The total number of N.O. or N.C. CE5 and other N.C. CA5X auxiliary contacts is limited to 2.

1SBC100021S0201

NX contactor relays

Technical data

Contact utilization characteristics according to IEC

Contactor relay types	AC operated	**NX**
Standards		IEC 60947-1 / 60947-5-1 and EN 60947-1 / 60947-5-1
Rated operational voltage Ue max.		690 V
Rated frequency (without derating)		50 / 60 Hz
Conventional free-air thermal current Ith θ ≤ 40 °C		16 A
Ie / Rated operational current AC-15		
acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A
	220-230 V 50/60 Hz	4 A
	380-415 V 50/60 Hz	3 A
	500 V 50/60 Hz	2 A
	690 V 50/60 Hz	2 A
Rated making capacity AC-15		10 x Ie AC-15 acc. to IEC 60947-5-1
Rated breaking capacity AC-15		10 x Ie AC-15 acc. to IEC 60947-5-1
Ie / Rated operational current DC-13		
acc. to IEC 60947-5-1	24 V DC	6 A / 144 W
	48 V DC	2.8 A / 134 W
	72 V DC	1 A / 72 W
	110 V DC	0.55 A / 60 W
	125 V DC	0.55 A / 69 W
	220 V DC	0.30 A / 66 W
	250 V DC	0.30 A / 75 W
Short-circuit protection device for contactors		
Ue ≤ 500 V AC - gG type fuse		10 A
Rated short-time withstand current Icw		
at 40 °C ambient temperature,	for 1.0 s	100 A
in free air from a cold state	for 0.1 s	140 A
Minimum switching capacity		17 V / 5 mA
with failure rate acc. to IEC 60947-5-4		10-6
Non-overlapping time between N.O. and N.C. contacts		≥ 2 ms
Power dissipation per pole at 6 A		0.1 W
Max. electrical switching frequency	AC-15	1200 cycles/h

Contact utilization characteristics according to UL / CSA

Contactor relay types	AC operated	**NX**
Standards		UL 508, CSA C22.2 N°14-05
Max. operational voltage		600 V AC
Pilot duty		A600, Q300

General technical data

Contactor relay types	AC operated	**NX**
Rated insulation voltage Ui		
acc. to IEC 60947-5-1		690 V
acc. to UL / CSA		600 V
Rated impulse withstand voltage Uimp.		6 kV
Ambient air temperature		
Operation in free air		-40...+70 °C
Storage		-60...+80 °C
Climatic withstand		acc. to IEC 60068-2-30 and 60068-2-11 - UTE C 63-100 specification II
Maximum operating altitude (without derating)		3000 m
Mechanical durability		
Number of operating cycles		≥ 20 millions operating cycles
Max. switching frequency		6000 cycles/h
Shock withstand		
acc. to IEC 60068-2-27 and EN 60068-2-27		
Mounting position 1		
	Shock direction	1/2 sinusoidal shock for 11 ms: no change in contact position, closed or open position
	A	20 g
	B1	5 g
	B2	15 g
	C1	20 g
	C2	20 g

1SBC100022S0201

NX contactor relays

Technical data

Magnet system characteristics

Contactor relay types			AC operated	NX
Coil operating limits			**AC supply**	at θ ≤ 55 °C 0.85...1.1 x Uc
acc. to IEC 60947-4-1				Please also refer to "Mounting characteristics and conditions for use"
AC control voltage 50/60 Hz				
Rated control circuit voltage Uc			**at 50 Hz**	24...440 V
			at 60 Hz	24...440 V
Coil consumption	**Average pull-in value**		**50 Hz**	70 VA
			60 Hz	80 VA
			50/60 Hz (1)	74 VA / 70 VA
	Average holding value		**50 Hz**	8 VA / 2 W
			60 Hz	8 VA / 2 W
			50/60 Hz (1)	8 VA / 2 W
Drop-out voltage				approx. 40...65 % of Uc
Operating time				
Between coil energization and:		**N.O. contact closing**		10...26 ms
		N.C. contact opening		7...21 ms
Between coil de-energization and:		**N.O. contact opening**		4...11 ms
		N.C. contact closing		9...16 ms

(1) 50/60 Hz coils: see "Coil voltage code table".

Mounting characteristics and conditions for use

Contactor relay types		AC operated	NX
Mounting positions			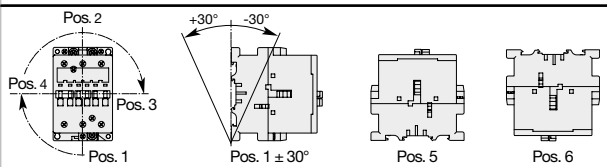
			Add-on N.O. or N.C. auxiliary contacts: see accessory fitting details for contactor relays
Control voltage / Ambient temperature			
Mounting positions	1, 1±30°, 2, 3, 4, 5	at θ ≤ 55 °C	0.85...1.1 x Uc
		at θ ≤ 70 °C	Uc
	6	at θ ≤ 55 °C	0.95...1.1 x Uc
		at θ ≤ 70 °C	unauthorized
Mounting distances			The contactors can be assembled side by side
Fixing			
On rail according to IEC 60715, EN 60715			35 x 7.5 mm or 35 x 15 mm
By screws (not supplied)			2 x M4 screws placed diagonally

Connecting characteristics

Contactor relay typesa			AC operated	NX
Main terminals				 Screw terminals with cable clamp
Connection capacity (min. ... max.)				
Main conductors (poles + coil terminals)				
Rigid			1 x	1...4 mm²
			2 x	1...4 mm²
Flexible with ferrule			1 x	0.75...2.5 mm²
			2 x	0.75...2.5 mm²
Bars or lugs		Pole terminals	L <	7.7 mm
			l <	3.7 mm
		Coil terminals	L <	8 mm
			l <	3.7 mm
Connection capacity acc. to UL / CSA			1 or 2 x	AWG 18...14
Stripping length				10 mm
Tightening torque				1 Nm / 9 lb.in
Degree of protection				
acc. to IEC 60947-1 and IEC 60529				
All terminals				IP20 (only front side)
Screw terminals				Delivered in open position, screws of unused terminals must be tightened
All terminals				M3.5
			Screwdriver type	Flat Ø 5.5 / Pozidriv 2

1SBC100023S0201

NX contactor relays

Terminal marking and positioning

NX contactor relays - AC operated

Standard devices without addition of auxiliary contacts



NX22E



NX31E



NX40E



NX22E



NX31E



NX40E

Other possible contact combinations with auxiliary contacts added by the user

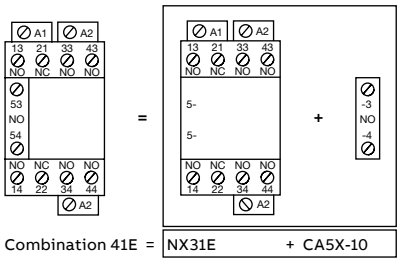

Combination 41E = NX31E + CA5X-10

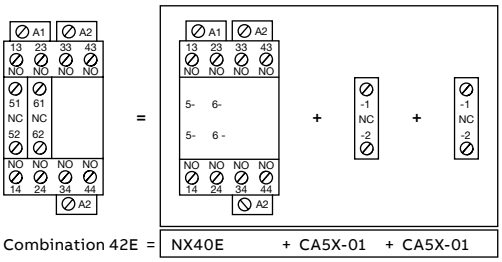

Combination 42E = NX40E + CA5X-01 + CA5X-01



Combination 41E



Combination 42E

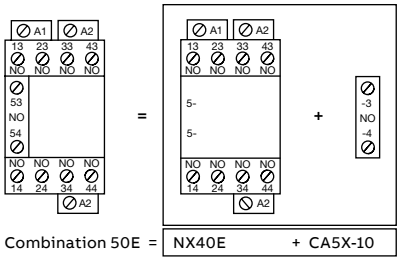

Combination 50E = NX40E + CA5X-10

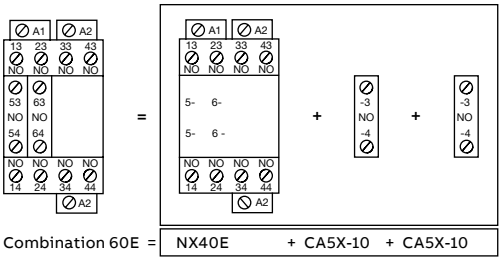

Combination 60E = NX40E + CA5X-10 + CA5X-10



Combination 50E



Combination 60E

Accessories for AX09 ... AX150 3-pole contactors and NX contactor relays

Auxiliary contact blocks
64 Ordering details
65 Technical data
68 Terminal marking and positioning

Electronic timers
69 Ordering details
70 Technical data

Mechanical and electrical interlock units
72 Ordering details
73 Technical data

Interface relays
74 Ordering details
75 Technical data

Mechanical latching units
76 Ordering details
77 Technical data

Surge suppressors for contactor coils
78 Ordering details
79 Technical data

80 **Additional terminal blocks**

81 **Function markers**

82 **Terminal connecting strips and shorting bars**

83 **Connection accessories for starting solutions**

84 **Phase to phase connections**

1SBC101062S0201

Auxiliary contact blocks


AX07015

CA5X-10


AX07013 CA5X 4P

CA5X-4P


1SBC573752F0301

CAL5X-11

The auxiliary contact blocks are used for the operation of auxiliary circuits and control circuits for standard industrial environments.

Types of auxiliary contact blocks for front mounting:

- CA5X 1 or 4-pole block, instantaneous with N.O., N.C. contacts.

Select the 4-pole auxiliary contact blocks CA5X-..E, CA5X-..M, according to the contactor type for compliance with the standard requirements (see "Terminal Marking and Positioning").

Types of auxiliary contact blocks for side mounting:

- CAL... 2-pole block instantaneous N.O. + N.C. contacts.

For clipping onto the right- and/or left-hand side of the contactors.

The auxiliary contact blocks are equipped with screw type connecting terminals delivered open, protected against accidental direct contact and bear the corresponding function marking.

For contactors	Auxiliary contacts	Type	Order code	Pkg qty	Weight (1 pce)
					kg
Front-mounted instantaneous auxiliary contact blocks					
AX09 ... AX150 and	1 –	CA5X-10	1SBN019010R1010	10	0.014
NX 4-pole	– 1	CA5X-01	1SBN019010R1001	10	0.014
AX50 ... AX150	2 2	CA5X-22E	1SBN019040R1022	2	0.060
AX09 ... AX40-30-10	2 2	CA5X-22M	1SBN019040R1122	2	0.060
Side-mounted instantaneous auxiliary contact block, 2 pole					
AX09 ... AX80 and NX - 4 pole	1 1	CAL5X-11	1SBN019020R1011	2	0.050
AX95 ... AX150	1 1	CAL18X-11	1SFN019820R1011	2	0.050

For each contactor or contactor relay, refer to "Accessories fitting details" table.

Auxiliary contact blocks

Technical data

Contact utilization characteristics according to IEC

Types		Front mounted	Side mounted	
		1-pole CA5X, 4-pole CA5X	CAL5X-11	CAL18X-11, CAL18X-11B
Standards		IEC 60947-5-1 and EN 60947-5-1		
Rated insulation voltage Ui acc. to IEC 60947-5-1		690 V		
Rated operational voltage Ue max.		24...690 V AC		
Conventional thermal current Ith - θ ≤ 40 °C		16 A		
Ie / Rated operational current AC-15 acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A		
	220-240 V 50/60 Hz	4 A		
	380-440 V 50/60 Hz	3 A		
	500-690 V 50/60 Hz	2 A		
Making capacity		10 x Ie AC-15 acc. to IEC 60947-5-1		
Breaking capacity		10 x Ie AC-15 acc. to IEC 60947-5-1		
Ie / Rated operational current DC-13 acc. to IEC 60947-5-1	24 V DC	6 A / 144 W		
	48 V DC	2.8 A / 134 W		
	72 V DC	1 A / 72 W		
	110 V DC	0.55 A / 60 W		
	125 V DC	0.55 A / 69 W		
	220 V DC	0.3 A / 66 W		
	250 V DC	0.3 A / 75 W		
Short-circuit protection device gG type fuse		10 A		
Rated short-time withstand current Icw	for 1.0 s	100 A		
θ = 40 °C	for 0.1 s	140 A		
Minimum switching capacity				
AX09 ... AX80 contactors		12 V / 3 mA		–
with failure rate acc. to IEC 60947-5-4		≤ 10-6		–
AX95 ... AX150 contactors		24 V / 50 mA	–	24 V / 50 mA (0.5 million of operating cycles)
with failure rate acc. to IEC 60947-5-4		–	–	≤ 10-6
AX185 ... AX205 contactors		–	–	24 V / 50 mA (0.5 million of operating cycles)
with failure rate acc. to IEC 60947-5-4		–	–	≤ 10-6
AX260 ... AX370 contactors		–	–	–
with failure rate acc. to IEC 60947-5-4		–	–	–
Power dissipation per pole at 6 A		0.1 W		0.15 W
Mechanical durability				
Number of operating cycles		10 millions (AX09 ... AX80) 3 millions (AX95 ... AX150)	10 millions	5 millions (AX95 ... AX205)
Max. switching frequency		3600 cycles/h		
Max. electrical switching frequency	AC-15	1200 cycles/h		
	DC-13	900 cycles/h		

Contact utilization characteristics according to UL / CSA

Standards		UL 508, CSA C22.2 N°14
Max. operational voltage		**600 V AC, 250 V DC**
Pilot duty		**A600, Q300**
AC thermal taed current		10 A

Connecting characteristics

Connection capacity (min. ... max.)				
Rigid solid	1 x	1...4 mm²		
	2 x	1...4 mm²		
Flexible with ferrule	1 x	0.75...2.5 mm²		
	2 x	0.75...2.5 mm²		
Lugs	L ≤	7.7 mm	8 mm	
	l >	3.7 mm	3.7 mm	
Tightening torque		1 Nm / 9 lb.in		
Connection capacity acc. to UL / CSA	1 or 2 x	AWG 18...14		–
Stripping length		1-pole: 11 mm	10 mm	–
		4-pole: 10 mm		
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529	Terminals	IP20		
Screw terminals		Delivered in open position, screws of unused terminals must be tightened		
All terminals		M3.5		
Screwdriver type		Flat Ø 5.5 / Pozidriv 2		

1SBC100182S0201-revA

Auxiliary contact blocks

for severe industrial environments



CE5-01W

The auxiliary contact blocks are used for the operation of auxiliary and control circuits for severe industrial environments.

Types of auxiliary contact blocks for front mounting:

1-pole block, instantaneous with N.O. contact or N.C. contact, designed in 2 protection versions:

CE5-..D with built-in microswitch IP40, degree of protection (IP20 on terminals)

CE5-..W with built-in microswitch IP67, degree of protection (IP20 on terminals).

The auxiliary contact blocks are equipped with screw type connecting terminals delivered open, protected against accidental direct contact and bear the corresponding function marking each side of the mechanical latch).

For contactors	Auxiliary contacts		Type	Order code	Pkg qty	Weight (1 pce)
						kg
Front-mounting instantaneous auxiliary contact blocks, 1-pole						
AX09 ... AX80, NX	1	–	CE5-10D0.1	1SBN010015R1010	1	0.020
	–	1	CE5-01D0.1	1SBN010015R1001	1	0.020
	1	–	CE5-10D2	1SBN010017R1010	1	0.020
	–	1	CE5-01D2	1SBN010017R1001	1	0.020
	1	–	CE5-10W0.1	1SBN010016R1010	1	0.020
	–	1	CE5-01W0.1	1SBN010016R1001	1	0.020
	1	–	CE5-10W2	1SBN010018R1010	1	0.020
	–	1	CE5-01W2	1SBN010018R1001	1	0.020

For each contactor type, refer to "Accessory fitting details" table.

Auxiliary contact blocks

Technical data

Contact utilization characteristics according to IEC

Types			**Front-mounted** 1-pole CE5-..0.1	1-pole CE5-..2
Standards			IEC 60947-5-1 and EN 60947-5-1	
Rated insulation voltage Ui acc. to IEC 60947-5-1			250 V	
Rated operational voltage Ue max.			125 V	250 V
Conventional thermal current Ith - θ ≤ 40 °C			0.1 A	2 A
Ie / Rated operational current acc. to IEC 60947-5-1			AC-14	AC-15
	24-127 V 50/60 Hz		0.1 A	2 A
	220-240 V 50/60 Hz		–	2 A
Making capacity acc. to IEC 60947-5-1			6 x Ie AC-14	10 x Ie AC-15
Breaking capacity acc. to IEC 60947-5-1			6 x Ie AC-14	10 x Ie AC-15
Ie / Rated operational current DC-12 acc. to IEC 60947-5-1				
		24 V DC	0.1 A	2 A
		48 V DC	0.1 A	1 A
		72 V DC	0.1 A	0.3 A
		110 V DC	0.1 A	0.2 A
		125 V DC	–	0.2 A
		220 V DC	–	0.1 A
Short-circuit protection device			0.1 A (FF type fuses) (1)	10 A (FF type fuses) (1)
Minimum switching capacity				
AX09 ... AX80, NX contactors			3 V / 1 mA	17 V / 1 mA
With failure rate acc. to IEC 60947-5-4			–	≤ 10^{-7}
Mechanical durability	Number of operating cycles		5 millions for CE5-..D0.1	5 millions for CE5-..D2
			2.5 millions for CE5-..W0.1	2.5 millions for CE5-..W2
	Max. switching frequency		3600 cycles/h	
Electrical durability	Number of operating cycles		2.5 millions for CE5-..D0.1	1 million for CE5-..D2
			0.7 millions for CE5-..W0.1	0.3 millions for CE5-..W2
	Max. switching frequency	AC-14	1200 cycles/h	
		AC-15	1200 cycles/h	
		DC-12	900 cycles/h	

Contact utilization characteristics according to UL / CSA

Standards	UL 508, CSA C22.2 N°14	
Max. operational voltage	125 V AC / 110 V DC	250 V AC / 220 V DC
Pilot duty		
AC thermal rated current	0.1 A	2 A

Connecting characteristics

Connection capacity (min. ... max.)				
	Rigid solid	1 x	1...4 mm²	
		2 x	1...4 mm²	
	Flexible with ferrule	1 x	0.75...2.5 mm²	
		2 x	0.75...2.5 mm²	
	Lugs	L <	7.7 mm	
		I >	3.7 mm	
Connection capacity acc. to UL / CSA		1 or 2 x	AWG 18...14	
Tightening torque			1 Nm	
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529		Terminals	IP20	
		Microswitches	IP40 for CE5-..D0.1	IP40 for CE5-..D2
			IP67 for CE5-..W0.1	IP67 for CE5-..W2
Screw terminals			Delivered in open position, screws of unused terminals must be tightened	
All terminals			M3.5	
Screwdriver type			Flat Ø 5.5 / Pozidriv 2	

(1) or HRC fuses for very fast action (6.3 x 32 mm size).

1SBC100228S0201-revA

Add-on auxiliary contacts

Terminal marking and positioning

1-pole auxiliary contacts



CA5X-01



CA5X-10



CE5-01



CE5-10

2-pole auxiliary contacts



CAL5X-11, CAL18X-11
(L. h. s. mounted)



CAL5X-11, CAL18X-11
(R. h. s. mounted)

4-pole auxiliary contacts



CA5X-22E



CA5X-22M

1SBC100183S0201

Electronic timers



TEF5-OFF

TEF5 frontal electronic timers are used for realizing timing function and are available in ON-delay and OFF-delay versions.

Compact solution in cabinet compared to separate timers

TEF5 electronic timers are front-mounted and locked on AX contactors or NX contactor relays. A mechanical indicator allows to show the state of the contactor.

TEF5 electronic timers are supplied by direct wiring to the coil terminals A1 - A2 of the contactor or contactor relay. A varistor is integrated on the timer to offer a built-in protection against surges in the contactor coil.

Available for a wide control voltage range 24...240 V AC / DC

TEF5-ON or TEF5-OFF allow time-delayed functions up to 100 s in 3 distinct time ranges, independently of the control system. The time delay ranges are selected by a switch and the time delay can be adjusted by means of a rotary switch. The timing function is activated by closing or opening the device on which the timer is mounted. The OFF-delay version operates without additional control supply.

For contactors, contactor relays	**Time delay range** selected by switch	**Delay type**	**Rated control circuit voltage Uc** V 50/60 Hz or DC	**Auxiliary contacts**	**Type**	**Order code**	**Weight Pkg (1 pce)** kg
AX09 ... AX80 NX 4-pole	0.1...1 s 1...10 s 10...100 s	ON-delay	24...240	1 1	TEF5-ON	1SBN020312R1000	0.065
		OFF-delay	24...240	1 1	TEF5-OFF	1SBN020314R1000	0.065

Electronic timers
Technical data

Contact utilization characteristics according to IEC

Types			TEF5-ON	TEF5-OFF
Standards			IEC 60947-5-1 and EN 60947-5-1	
Rated insulation voltage Ui acc. to IEC 60947-5-1			400 V	
Rated impulse withstand voltage Uimp			4 kV	
Rated operational voltage Ue max.			240 V	
Rated frequency (without derating)			50 / 60 Hz	
Conventional thermal current Ith - θ ≤ 40 °C			5 A	
Ie / Rated operational current AC-15 acc. to IEC 60947-5-1		24-127 V 50/60 Hz	3 A	
		220-240 V 50/60 Hz	1.5 A	
Making capacity			10 x Ie AC-15 acc. to IEC 60947-5-1	
Breaking capacity			10 x Ie AC-15 acc. to IEC 60947-5-1	
Ie / Rated operational current DC-13 acc. to IEC 60947-5-1		24 V DC	1 A / 24 W	
Short-circuit protection device gG type fuse			6 A	
Rated short-time withstand current Icw		for 1.0 s	8 A	
θ = 40 °C		for 0.1 s	8 A	
Minimum switching capacity			12 V / 3 mA	
with failure rate acc. to IEC 60947-5-4		24 V DC	10^{-7}	
Power dissipation per pole at 3 A			0.1 W	
Function diagram			ON-delay	OFF-delay
			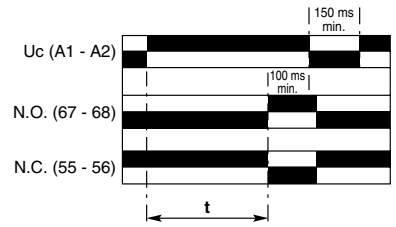	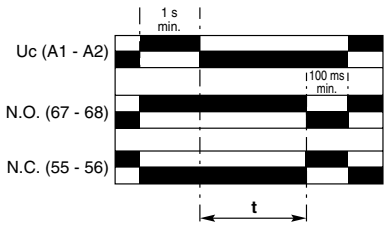
			Bistable relay inside. Before use, once apply Uc then switch it off in order to initialize position of the contacts.	
Control circuit voltage				
AC control voltage	Rated control circuit voltage Uc		24...240 V AC	
50/60 Hz	Average consumption		1.5 mA RMS	1 mA RMS
DC control voltage	Rated control circuit voltage Uc		24...240 V DC	
	Average consumption		1.5 mA	1 mA
Rated frequency limits			50 / 60 Hz	
Supply voltage range			0.85...1.1 x Uc (at θ ≤ 70 °C)	
Overvoltage protection			Varistor included	
Time delay range (t) selected by switch		0.1...1 s		
		1...10 s		
		10...100 s		
On-load reiteration accuracy under constant conditions			≤ 1 %	
Minimum ON period			0.1 s	1 s
Recovery time			0.15 s	0.1 s
Ambient air temperature	Operation		-25 °C ... +70 °C	
	Storage		-40 °C ... +80 °C	
Climatic withstand			Category B according to IEC 60947-1 Annex Q	
Maximum operating altitude			2000 m	
Mounting positions			Acc. to mounting positions permitted on contactors or contactor relays	
Shock withstand acc. to IEC 60068-2-27 and EN 60068-2-27 (Mounting position 1)			1/2 sinusoidal shock for 11 ms: no change in contact position Same as contactor or contactor relay	
Mechanical durability				
	Number of operating cycles		5 millions operating cycles	
	Max. switching frequency		3600 cycles/h	1800 cycles/h
Max. electrical switching frequency				
		AC-15	1200 cycles/h	
		DC-13	900 cycles/h	

Electronic timers

Technical data

Contact utilization characteristics according to UL / CSA

Types	TEF5-ON	TEF5-OFF
Standards	UL 508, CSA C22.2 N°14	
Rated insulation voltage Ui acc. to UL / CSA	300 V	
Max. operational voltage	240 V	
Pilot duty	B300, R300	
AC thermal rated current	5 A	
AC maximum volt-ampere making	3600 VA	
AC maximum volt-ampere breaking	360 VA	
DC thermal rated current	1 A	
DC maximum volt-ampere making-breaking	28 VA	

Connecting characteristics

Connection capacity (min. ... max.)			
	Rigid solid	1 x	1...2.5 mm²
		2 x	1...2.5 mm²
	Flexible with non insulated ferrule	1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
	Flexible with insulated ferrule	1 x	0.75...2.5 mm²
		2 x	0.75...1.5 mm²
	Lugs	L ≤	8 mm
		l >	3.7 mm
Connection capacity acc. to UL / CSA		1 or 2 x	AWG 18...14
Stripping length			10 mm
Tightening torque			1 N.m / 9 lb.in
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			IP20
Screw terminals			Delivered in open position, screws of unused terminals should be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2
Terminal Marking			 

1SBC101674S0201_AC

Mechanical and electrical interlock units


1SBC580411F0301

VM300H

Mechanical interlock units

The VM mechanical interlock units are designed for the interlocking of two AX contactors.
When mounted between two contactors, the VM mechanical interlock unit prevents one of the contactors from closing as long as the other contactor is closed.

Left side contactor	Right side contactor	Mounting	Auxiliary contacts	Type	Order code	Pkg qty	Weight (1 pce) kg
Mechanical interlock units for two horizontal mounted contactors (1)							
AX09 ... AX40	AX09 ... AX40	Horizontal	– –	VM5-1	1SBN030100R1000	1	0.066
Mechanical interlock units for two vertical mounted contactors							
Up contactor	**Down contactor**	**Mounting**					
AX95 ... AX150	AX150 ... AX205	Vertical	– –	VM300V	1SFN034701R1000	1	0.150

Mechanical and electrical interlock sets

The VM mechanical interlock units are designed for the interlocking of two AX contactors.
When mounted between two contactors, the VM mechanical interlock unit prevents one of the contactors from closing as long as the other contactor is closed.
The VE units include 2 N.C. contacts for electrical interlocking function.



1SBC100055V0014

VE5-1

Left side contactor	Right side contactor	Mounting	Auxiliary contacts	Type	Order code	Pkg qty	Weight (1 pce) kg
Mechanical interlock units for two horizontal mounted contactors							
AX09 ... AX40	AX09 ... AX40	Horizontal	– 2	VE5-1	1SBN030110R1000	1	0.076
AX32 ... AX80	AX50 ... AX80	Horizontal	– 2	VE5-2	1SBN030210R1000	1	0.146
AX50 ... AX80	AX32 ... AX80	Horizontal	– 2	VE5-2	1SBN030210R1000	1	0.146
AX50 ... AX80	AX95 ... AX150	Horizontal	– 2	VE5-2 (2)	1SBN030210R1000	1	0.146
AX95 ... AX150	AX50 ... AX80	Horizontal	– 2	VE5-2 (2)	1SBN030210R1000	1	0.146
AX95 ... AX150	AX95 ... AX150	Horizontal	– 2	VE5-2	1SBN030210R1000	1	0.146

(1) Mechanical durability: VM5-1 = 5 millions cycles, VM300H = 1 million cycles.
VM19 = 0,5 million cycles, VM205/260 = 1 million cycles, VM300V = 1 million cycles.
(2) The combination of AX50 ... AX80 contactors interlocked with AX95 ... AX150 contactors cannot be mounted on symmetrical rail (75 mm, IEC/EN 60715).

Mechanical and electrical interlock units

Technical data

Contact utilization characteristics according to IEC

Types			VE5-1	VE5-2
Standards			IEC 60947-5-1 and EN 60947-5-1	
Rated insulation voltage Ui				
acc. to IEC 60947-5-1			690 V	
Rated operational voltage Ue max.			24...690 V	
Conventional thermal current Ith - θ ≤ 40 °C			16 A	
Ie / Rated operational current AC-15				
acc. to IEC 60947-5-1		24-127 V 50/60 Hz	6 A	
		220-240 V 50/60 Hz	4 A	
		380-440 V 50/60 Hz	3 A	
		500-690 V 50/60 Hz	2 A	
Making capacity			10 x Ie AC-15 acc. to IEC 60947-5-1	
Breaking capacity			10 x Ie AC-15 acc. to IEC 60947-5-1	
Ie / Rated operational current DC-13				
acc. to IEC 60947-5-1		24 V DC	6 A	
		48 V DC	2.8 A	
		72 V DC	1 A	
		125 V DC	0.55 A	
		250 V DC	0.3 A	
Short-circuit protection device - gG type fuse			10 A	
Rated short-time withstand current Icw		for 1.0 s	100 A	
θ = 40 °C		for 0.1 s	140 A	
Power dissipation per pole at 6 A			0.15 W	
Mechanical durability				
Number of operating cycles			5 millions operating cycles	
Max. switching frequency			600 cycles/h	

Utilization characteristics according to UL / CSA

Standards		UL 508, CSA C22.2 N°14
Max. operational voltage		600 V

Connecting characteristics

Connection capacity (min. ... max.)			
	Rigid solid	1 x	1...4 mm²
		2 x	1...4 mm²
	Flexible with ferrule	1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
	Lugs	L <	8 mm
		I >	3.5 mm
Tightening torque	Recommended		1 Nm
	Max.		1.2 Nm
Degree of protection			IP20
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2
Terminal marking			

Technical note: when, during switching, the arc time is estimated to more than 40 ms, the closing signal of one of the two contactors must be delayed with respect to the opening signal of the other contactor in order to prevent a short-circuit.

1SBC100028S0201

Interface relays



1SBC101005F0014

RA5-1

RA5-1 interface relay is designed to receive 24 V DC signals delivered by PLC's or other sources with a low output power and to restore them with sufficient power to operate the coils of the relevant AX50, AX65 and AX80 contactors.

RA5-1 interface relay is made up of a miniature electromechanical relay equipped with a N.O. contact and with a low consumption 24 V DC coil.

The interface relay coil is controlled by the PLC while the N.O. contact ensures switching of the power contactor.

Coil switching gives rise to overvoltages which have adverse effects on the electronic devices, insulators and, more generally, on component lifetime. The RA5-1 is equipped with surge suppressors:

- on the 24 V DC relay coil via a diode,
- on the power contactor coil via a varistor.

Furthermore, the RA5-1 is protected against relay pole reversal by a diode inserted between the E1 and E2 input terminals.

For contactors	Coil voltages	Rated control circuit voltage Uc	Type	Order code	Pkg qty	Weight (1 pce)
	V 50/60 Hz	V DC				kg
AX50 ... AX80	24...250	24	RA5-1	1SBN060300R1000	1	0.050
			RA5-1	1SBN060300T1000	10	0.050

Interface relays

Technical data

Type			RA5-1
Utilization characteristics according to IEC			
Standards			IEC 60255-5
Rated insulation voltage Ui acc. to IEC 60947-4-1			250 V AC
Ambient air temperature			
In free air operation	at Uc = 24 V DC (between E1 and E2)		-25...+70 °C
		from 0.85 to 1.1 x Uc	-25...+55 °C
Storage			-40...+70 °C
Climatic withstand			Complies with that of associated contactors
Maximum operating altitude			3000 m
Mounting positions			No limitation
Fixing			Using the contactor A1 and A2 teminal connecting parts
Connecting characteristics			
Connection capacity (min. ... max.)			
Rigid solid		1 x	1...4 mm²
		2 x	1...4 mm²
Flexible with ferrule		1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
Lugs		L <	8 mm
		l >	3.5 mm
Tightening torque			
Recommended			1 Nm
Max.			1.2 Nm
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			Protection against direct contact in acc. with EN 50274 RA5-1 wired and mounted on the associated contactor
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2
Working data			
Surge suppression			
For contactor coil			Varistor
For interface relay coil			Diode
Protection against polarity reversal between terminals E1 and E2			Diode
Interface relay operating time			Closing and drop-out ≤ 10 ms
Total operating time, interface relay + contactor			
Between energization and:		N.O. contact closing	20...37 ms
		N.C. contact opening	17...32 ms
Between de-energization and:		N.O. contact opening	17...25 ms
		N.C. contact closing	20...28 ms
Electrical input data			
Control voltage (E1 and E2 terminals) Uc			
Rated value			24 V DC
Max. range at ambient temperature 20 °C			19...30 V DC
Max. consumption for Uc = 24 V DC, θ = 20 °C			0.3 W
"0" status (relay open)		for Uc	≤ 2.4 V DC
		for Ic	< 1 mA
"1" status (relay closed)		for Uc	≥ 19 V DC
Max. short supply interruption immunity time			2 ms
Electrical output data			
Switching voltage (A0 and A2 terminals)			≤ 250 V AC
Electrical durability			
Number of operating cycles			2 millions
Connection			



The "E1+" and "E2-" input terminals must be connected, according to their polarity, to the PLC output.
The RA5-1 is equipped with two terminal pads for connection to the A1 and the A2 terminals of the contactor coil.
This coil is supplied between the A0 and the A2 terminals of the RA 5-1.
Mounting: terminals pads clamped inside the contactor coil terminals.

1SBC100245S0201-AC

Mechanical latching units



WB75-A



Terminal marking

For converting standard contactors into latched contactors.

The WB75-A block contains a mechanical latching device with electromagnetic impulse unlatching (AC or DC) or manual unlatching.

Captive screw type connecting terminals, built-in cable clamps, M3.5 (+,-) pozidriv 2 screw with screwdriver guidance; delivered untightened and protected against accidental direct contact.

Operation

After closing, the contactor continues to be held in the closed position by the latching mechanism without supply voltage at the contactor coil terminals.

Contactor opening can be controlled:

- electrically by an impulse (AC or DC) on the WB75-A block coil.
  (the coil is not designed to be permanently energized)
- manually by pressing the pushbutton on the front face of the WB75-A block.

Mounting

The WB75-A block is clipped onto the front face of the 1-stack contactor where it takes up two slots. The two other slots may accept CA5X single pole auxiliary contacts (1 block on each side of the mechanical latch).

For contactors	Rated control circuit voltage Uc		Type	Order code	Pkg qty	Weight (1 pce)
	V 50 Hz or DC	V 60 Hz				kg
AX09 ... AX80	24	24...28	WB75-A	FPTN372726R1001	1	0.120
	42	42...48	WB75-A	FPTN372726R1002	1	0.120
	48	48...55	WB75-A	FPTN372726R1003	1	0.120
	110	110...127	WB75-A	FPTN372726R1004	1	0.120
	220...230	220...255	WB75-A	FPTN372726R1006	1	0.120
	230...240	230...277	WB75-A	FPTN372726R1005	1	0.120
	380...415	380...440	WB75-A	FPTN372726R1007	1	0.120
	415...440	440...480	WB75-A	FPTN372726R1008	1	0.120

Mechanical latching units

Technical data

Type			WB75-A
Utilization characteristics according to IEC			
Rated insulation voltage Ui acc. to IEC 60947-1			690 V
Max. electrical impulse time			
On AC coil (with load factor 5 %)			20 s
On DC coil (with load factor 3 %)			8 s
Min. electrical impulse time			
For latching (energizing of the contactor coil)		AC	50 ms
For pull-out (energizing of the WB block coil)		AC	30 ms
Coil operating limits		AC or DC supply	0.85...1.1 x Uc
AC control voltage 50/60 Hz			
Rated control circuit voltage Uc			24...480 V AC
Coil consumption	Average pull-in value		90 VA
	Average holding value		60 VA
DC control voltage			
Rated control circuit voltage Uc			24...440 V DC
Coil consumption	Average pull-in value		110 W
	Average holding value		110 W
Operating time			
On contactor closing (latching)			
Between coil energization and:	N.O. contact closing		No difference with the operation of a contactor without mechanical latching unit
	N.C. contact opening		No difference with the operation of a contactor without mechanical latching unit
On contactor opening (unlatching)			
Between WB coil energization and:	N.O. contact opening		5...25 ms
	N.C. contact closing		7...28 ms
Mechanical durability			
Number of operating cycles			1 million operating cycles
Max. switching frequency			3600 cycles/h with on-load factor of 8 %
Connecting characteristics			
Connection capacity (min. ... max.)			
Rigid solid		1 x	1...4 mm²
		2 x	1...4 mm²
Flexible with ferrule		1 x	0.75...2.5 mm²
		2 x	0.75...2.5 mm²
Lugs		L <	8 mm
		l >	3.5 mm
Tightening torque		Recommended	1 Nm
		Max.	1.2 Nm
Screw terminals			Delivered in open position, screws of unused terminals must be tightened
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2

Surge suppressors for contactor coils



The operation of inductive circuits causes overvoltages, in particular on opening of the contactor coil.

The electromagnetic energy stored in the coil during contactor closing is restored on opening in the form of surges, the slope and amplitude of which may rise to several kilovolts. A number of drawbacks are observed ranging from interference on the electronic devices to breakdown of insulators and even destruction of certain sensitive components.
The graph opposite reproduces the oscillogram showing voltage discharges at the terminals of a 42 V / 50 Hz coil without peak clipping. The coil was switched by 8 series-connected poles of a contactor relay.

Following a burst of discharges with a very steep slope a damped oscillation emerges with a peak value of 3500 V.

Overvoltage Factor
The overvoltage factor k is defined as the ratio of the maximum overvoltage peak value Ûs to the peak value Ûc of the coil rated control voltage Uc:

$$k = \frac{\hat{U}s\ max.}{\hat{U}c} \quad \text{or in AC:} \quad k = \frac{\hat{U}s\ max.}{Uc\sqrt{2}}$$

For example the following is obtained for the above graph: $k = \frac{3500}{42\sqrt{2}} \approx 60$


1SBC574001F0301

RV5/50


1SBC573891F0301

RC5-1/50

To reduce the harmful effects of these overvoltages, ABB has developed a range of surge suppressors designed to reduce the k factor defined above and to limit or even completely eliminate the high pre-damping voltage frequencies.

Each case is different, but the technical data tolerances and the generous sizing of parts have enabled us to reduce the number of variants.

We have chosen the following solutions: varistors and RC blocks.

Note: A varistor is a resistor whose value decreases to a very large extent when a certain voltage is applied at its terminals.

For contactors	Rated control circuit voltage Uc V AC	Type	Order code	Pkg qty	Weight (1 pce) kg
AX09 ... AX150	24...50	RV5/50	1SBN050010R1000	2	0.015
	50...133	RV5/133	1SBN050010R1001	2	0.015
	110...250	RV5/250	1SBN050010R1002	2	0.015
	250...440	RV5/440	1SBN050010R1003	2	0.015
AX09 ... AX40	24...50	RC5-1/50	1SBN050100R1000	2	0.012
	50...133	RC5-1/133	1SBN050100R1001	2	0.012
	110...250	RC5-1/250	1SBN050100R1002	2	0.012
	250...440	RC5-1/440	1SBN050100R1003	2	0.012
AX50 ... AX150	24...50	RC5-2/50	1SBN050200R1000	2	0.015
	50...133	RC5-2/133	1SBN050200R1001	2	0.015
	110...250	RC5-2/250	1SBN050200R1002	2	0.015
	250...440	RC5-2/440	1SBN050200R1003	2	0.015

1SBC100462S0201-revA

Surge suppressors for contactor coils

Technical data

Varistor	RV5/50	RV5/133	RV5/250	RV5/440
Rated control circuit voltage Uc	24...50 V AC	50...133 V AC	110...250 V AC	250...440 V AC
Residual overvoltage (clipping voltage)	132 V AC	270 V AC	480 V AC	825 V AC
Opening time growth factor	1.1...1.5			
Operating temperature	-20...+70 °C			
Connection to the coil terminals (parallel mounting)	Clip-on for both fixing and connection.			
Fixing	Clipped onto the top part of the contactor base without change in contactor overall dimensions.			
Advantages	High energy absorption: good damping - Unpolarized system.			
Drawback	Clipping as from Uvdr (1), thus voltage front up to this point.			

(1) Uvdr = Varistor operating voltage (voltage dependent resistor), tolerance ±10 %.

RC type	RC5-1/50 RC5-2/50	RC5-1/133 RC5-2/133	RC5-1/250 RC5-2/250	RC5-1/440 RC5-2/440
Rated control circuit voltage Uc	24...50 V AC	50...133 V AC	110...250 V AC	250...440 V AC
Residual overvoltage (clipping voltage)	2 to 3 x Uc max.			
Opening time growth factor	1.2...1.3			
Operating temperature	-20...+70 °C			
Connection to the coil terminals (parallel mounting)	Clip-on for both fixing and connection.			
Fixing	Clipped onto the top part of the contactor base without change in contactor overall dimensions.			
Advantages	Very fast clipping - Attenuation of steep fronts and thus of high frequencies. No operating delays.			

Wiring diagrams



Varistor



RC type

Dimensions



RV5, RC5

1SBC100463S0201

Additional terminal blocks


1SBC580742F0301

LD75


1SBC580723F0301

LD110

The LD terminal block is designed to increase the connecting capacity of the contactor on which it is fitted and for preparation of the wiring before final connection on the contactor.

The LD blocks are 3-pole terminal blocks with tunnel terminals. The available range can be used on AX50 to AX150 contactors.

The LD75 and LD110 terminal blocks are fixed in the 3 independent slots located above the built-in connectors.

For contactors	Type	Order code	Pkg qty	Weight (1 pce) kg
AX50 ... AX80	LD75	1SBN073508R1000	1	0.115
AX95 ... AX150	LD110 (1)	1SFN074308R1000	1	0.150

(1) up to 160 A AC-1.

Technical data

Types			LD75	LD110
Rated insulation voltage Ui				
acc. to IEC 60947-4-1				
acc. to UL / CSA				
Main terminals			 Screw terminals with single connector 10 x 11 mm	 Screw terminals with single connector 12 x 12 mm
Connection capacity (min. ... max.)				
Rigid	Solid (≤ 4 mm²)	1 x	6...50 mm²	10...70 mm²
	Stranded (≥ 6 mm²)	2 x	6...25 mm²	10...35 mm²
Flexible with ferrule		1 x	6...35 mm²	10...50 mm²
		2 x	6...16 mm²	10...25 mm²
Bars			10 mm	12 mm
Tightening torque			4 Nm	6 Nm
Degree of protection acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529				
Screw terminals			M6	M8
	Screwdriver type		Pozidriv 2	Hexagon socket (s = 4 mm)

Note: The utilization of LD additional terminal blocks keeps the possibility to connect the following cables directly in the contactor main terminals but the BED and BEM connecting sets can no longer be used.

	LD75	LD110
Possible cross section of rigid cable in the contactor terminals	50 mm²	95 mm²

Function markers

Terminals for control lead connections



BA5-50

Function markers AX09 ... AX150

Set of 50 function markers designed to be clipped onto the front face of devices. Details can be added to these markers using a ball point pen, indelible felt-tip pen or pentel white.

Self-adhesive labels (not supplied) can also be added to them.

Marker dimensions: 7 x 19 mm (0.276" x 0.748").

For contactors	Type	Order code	Pkg qty	Weight (1 pce) kg
AX09 ... AX150 and accessories	BA5-50	1SBN110000R1000	1	0.017



BA4



LK75-F

Terminals for control lead connections

Terminals designed to connect the control conductors to the main poles of the AX50 ... AX80 contactors.

Accessories clipped into the slots placed above each power terminal connector.

The LK75 are fitted with a pin designed to hold them in place until the connector has been fully clamped with its power cable.

- Degree of protection IP20
- Connecting terminal delivered in open position: cable clamp and M3.5 (+,-) pozidriv 2 screw.
- Cable cross-sectional area:
  - 1 or 2 rigid conductors 1...4 mm²
  - 1 or 2 flexible conductors with cable end 0.75...2.5 mm²
- Tightening torque for the LK screw:
  - recommended 1.00 Nm
  - maxi.1.20 Nm

For contactors	Type	Order code	Pkg qty	Weight (1 pce) kg
AX50 ... AX80	LK75-F	1SBN073552R1002	2	0.006



LK positioning

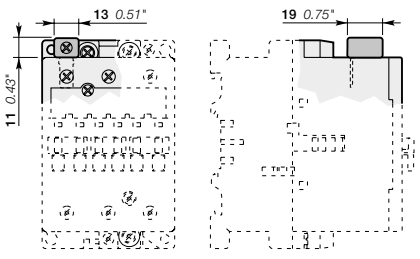

LK75-F

Main dimensions mm, inches

Terminal connecting strips and shorting bars



LY16

Parallel and series connection of 3-pole contactors:

- To obtain a star point (3 parallel-connected poles): LY allows 3 phases to be short-circuited.
- To connect poles in parallel and thus increase the AC load passing through the flow path made up of the parallel-connected poles: LP (2 poles); LY (3 poles).
- For the maximum permissible current values with parallel-connected poles see "Parallel connection of main poles".

The relevant cable cross-sectional area may limit the maximum permissible current. Consult information in table below.

- To connect poles in series and thus increase the DC load controlled by the poles: LP.

Types	for connection of "n" poles	with terminal	insulated
LP	n = 2	no	yes
LY	n = 3	no	yes

For contactors	max. nominal continuous current with "n" poles A	mm²	Type	Order code	Pkg qty	Weight (1 pce) kg
AX09	30	6	LP16	FPEP407000R0001	10	0.002
AX12	32	6				
AX18	34	6				
NX	-	6				
AX09	33	6	LY16	FPEP407002R0001	10	0.005
AX12	36	6				
AX18	39	6				

Connection accessories for starting solutions



BEA

Connection links between contactors and manual motor starters

The BEA connecting links are used to connect a contactor to associated manual motor starters. These are then used together as DOL or reversing starters in type 1 or type 2 coordination, complying with IEC 60947-4-1 and EN 60947-4-1.

The BEA insulated 3-pole connecting link (touch safe) ensures the electrical linking between the contactor and the corresponding manual motor starter.

For contactors	Manual motor starter	Type	Order code	Pkg qty	Weight (1 pce) kg
AX09 ... AX18	MS116-0.16 ... MS116-16	BEA16/116	1SBN081406R1000	10	0.020
AX25	MS116-0.16 ... MS116-16	BEA25/116	1SBN089306T1000	10	0.020
AX25	MS116-20 ... MS116-32	BEA25/132	1SBN089306T1001	10	0.020



BEM ... connections

Connection sets for reversing contactors

Connections between the main poles of two 3-pole contactors mounted side by side as reversing contactors with mechanical or electrical interlock.

The sets are made up of three upstream connections and three downstream connections.

- BER16V ... BER40V: Insulated, stranded, rigid copper wires
- BEM75-30 ... BEM110-30: Insulated, solid copper bars

On the AX contactors, the power supply by bars or cables equipped with lugs is directly connected to the terminal pads of the main poles. For flange connectors, LX terminal extension pieces should be used.



BEM 75-30

For contactors	Type	Order code	Pkg qty	Weight (1 pce) kg
AX09 ... AX18	BER16V	1SBN081411R1000	1	0.045
AX32, AX40	BER40V	1SBN082411R1000	1	0.085
AX50 ... AX80	BEM75-30	1SBN083501R1000	1	0.243
AX95 ... AX150	BEM110-30 (1)	1SFN084301R1000	1	0.450

(1) up to 160 A AC-1

Phase to phase connections

Connection sets for star-delta starters



BEP, BES

Phase to phase connections

Connections between the main poles of two 3-pole contactors horizontal mounted.

This set is made up of three downstream or upstream connections.

For contactors	Type	Order code	Pkg qty	Weight (1 pce) kg
AX50 ... AX80	BES75-30	1SBN083504R1000	1	0.130
AX95 ... AX150	BES110 (1)	1SFN084304R1000	1	0.250

(1) up to 160 A AC-1.



BED 110

Connections sets for star-delta starters

Connections between the main poles of a star-delta starter.

These sets are made up of:

- Three line contactor / delta contactor connections, upstream side
- Three connections for star and delta contactors, downstream side
- The necessary elements to create the star point upstream of the star contactor.
- Insulated, solid copper bars.

BED are designed for both star and delta contactors with or without mechanical interlock unit.

For line and delta contactors	For star contactors	Interlock unit between delta and star contactors	Type	Order code	Pkg qty	Weight (1 pce) kg
AX150	AX95	VE5-2	BED110 (1)	1SFN084503R1000	1	0.500

(1) up to 160 A AC-1.



BED 185

Voltage code table

The below tables indicate the available coil voltages and corresponding digits for order codes. When placing an order, please give the order code. Select a standard contactor from ordering detail pages. Change the coil voltage code in the order code according to the table below. Example: for contactor AX40-30-10 and coil 200 V 50 Hz, the order code is 1SBL321074R7510.

AX contactors

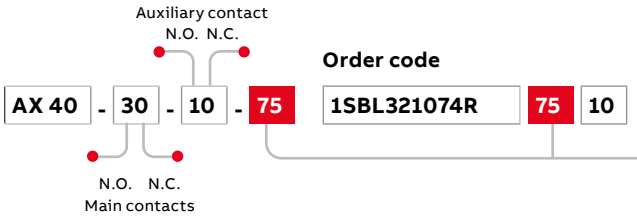

Order code

1SBL321074R	75	10

AC coil code
Contactors: AX

	50 Hz	60 Hz
81	**24 V**	**24 V**
26	**105 V**	**110...127 V**
75	**200 V**	**200...220 V**
85	380...**400 V**	**400**...415 V

Codes in bold for dual frequency coils.

NX contactor relays



Order code

1SBH901074R	75	40

AC coil code
Contactors: NX

	50 Hz	60 Hz
81	**24 V**	**24 V**
26	**105 V**	**110...127 V**
75	**200 V**	**200...220 V**
85	380...**400 V**	**400**...415 V

Codes in bold for dual frequency coils.

1SBC100467S0201

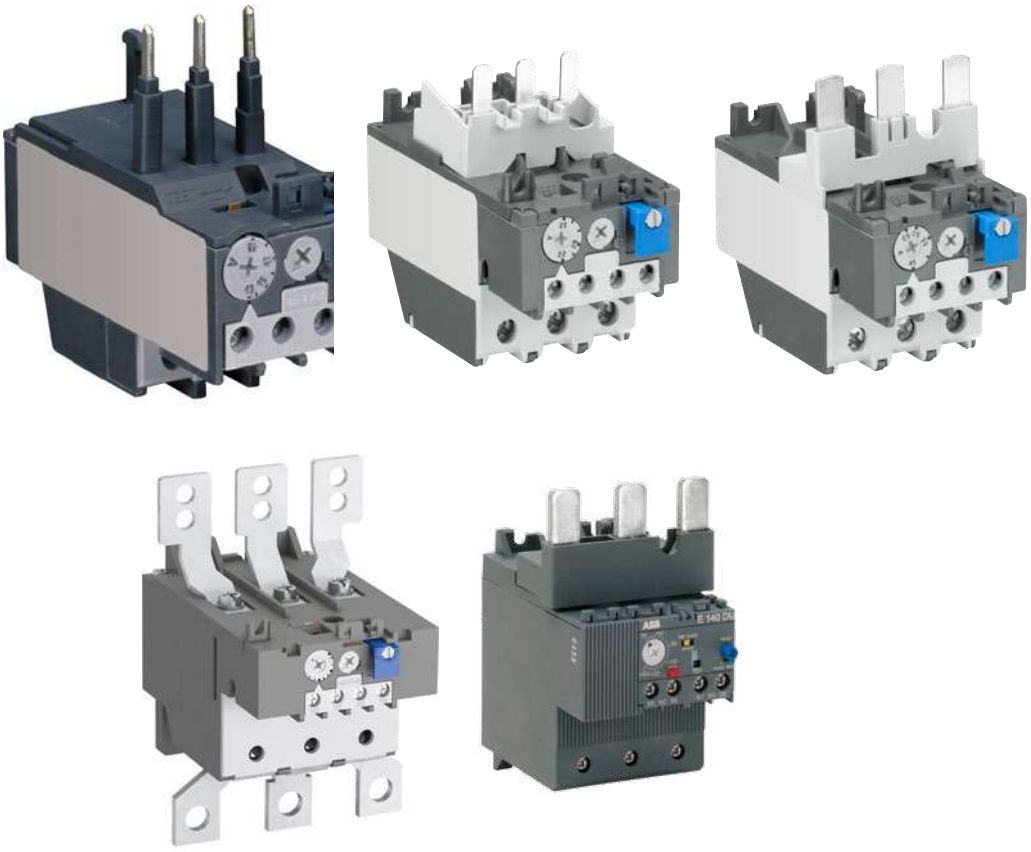

Overload relays

Overview
88 Thermal overload relays

TA25DU-M (0.10 … 32 A)
89 Ordering details
90 Technical data
93 Accessories
98 Dimensions

TA42DU-M (18 … 42 A)
89 Ordering details
90 Technical data
93 Accessories
98 Dimensions

TA75DU-M (18…80 A)
89 Ordering details
90 Technical data
93 Accessories
98 Dimensions

TA80DU-M (29…80 A)
94 Ordering details
95 Technical data
99 Dimensions

TA110DU-M (66 … 110 A)
94 Ordering details
95 Technical data
99 Dimensions

Overload relays

Thermal overload relay







Type	TA25DU-M	TA42DU-M	TA75DU-M	TA80DU-M	TA110DU-M
Current range	0.10 ... 32 A	18 ... 42 A	18 ... 80 A	29 ... 80 A	66 ... 110 A
Trip class	10A	10A	10A	10A	10A
Single mounting kit	DB25	DB80	DB80	DB80	DB200
For contactors	AX09 ... AX40	AX32 ... AX40	AX50 ... AX80	AX95 ... AX150	AX95 ... AX150

2CDC106131C0201I–revA

Thermal overload relays TA25DU-M / TA42DU-M / TA75DU-M

0.10 to 80 A



TA25DU-M



TA42DU-M



TA75DU-M

The TA25DU-M / TA42DU-M and TA75DU-M thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- Two electrically isolated auxiliary contacts – 1 N.O. + 1 N.C.
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications

Setting range A	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
TA25DU-M					
0.10 ... 0.16	0.50 A, Fuse type F	10A	TA25DU-0.16M	1SAZ211201R2005	0.150
0.16 ... 0.25	0.63 A, Fuse type F	10A	TA25DU-0.25M	1SAZ211201R2009	0.150
0.25 ... 0.40	1.25 A, Fuse type F	10A	TA25DU-0.4M	1SAZ211201R2013	0.150
0.40 ... 0.63	2 A, Fuse type gG / -	10A	TA25DU-0.63M	1SAZ211201R2017	0.150
0.63 ... 1.00	4 A, Fuse type gG / 2 A aM	10A	TA25DU-1.0M	1SAZ211201R2021	0.150
1.00 ... 1.40	6 A, Fuse type gG / 2 A aM	10A	TA25DU-1.4M	1SAZ211201R2023	0.150
1.30 ... 1.80	6 A, Fuse type gG / 4 A aM	10A	TA25DU-1.8M	1SAZ211201R2025	0.150
1.70 ... 2.40	6 A, Fuse type gG / 4 A aM	10A	TA25DU-2.4M	1SAZ211201R2028	0.150
2.20 ... 3.10	10 A, Fuse type gG / 6 A aM	10A	TA25DU-3.1M	1SAZ211201R2031	0.150
2.80 ... 4.00	10 A, Fuse type gG / 6 A aM	10A	TA25DU-4.0M	1SAZ211201R2033	0.150
3.50 ... 5.00	16 A, Fuse type gG / 10 A aM	10A	TA25DU-5.0M	1SAZ211201R2035	0.150
4.50 ... 6.50	20 A, Fuse type gG / 16 A aM	10A	TA25DU-6.5M	1SAZ211201R2038	0.150
6.00 ... 8.50	20 A, Fuse type gG / 20 A aM	10A	TA25DU-8.5M	1SAZ211201R2040	0.150
7.50 ... 11.00	35 A, Fuse type gG / 25 A aM	10A	TA25DU-11M	1SAZ211201R2043	0.150
10.00 ... 14.00	35 A, Fuse type gG / 25 A aM	10A	TA25DU-14M	1SAZ211201R2045	0.150
13.00 ... 19.00	50 A, Fuse type gG / 35 A aM	10A	TA25DU-19M	1SAZ211201R2047	0.170
18.00 ... 25.00	63 A, Fuse type gG / 50 A aM	10A	TA25DU-25M	1SAZ211201R2051	0.170
24.00 ... 32.00	80 A, Fuse type gG / 63 A aM	10A	TA25DU-32M	1SAZ211201R2053	0.200
TA42DU-M					
18 ... 25	63 A, Fuse type gG / 50 A aM	10A	TA42DU-25M	1SAZ311201R2001	0.335
22 ... 32	80 A, Fuse type gG / 63 A aM	10A	TA42DU-32M	1SAZ311201R2002	0.335
29 ... 42	100 A, Fuse type gG / 80 A aM	10A	TA42DU-42M	1SAZ311201R2003	0.335
TA75DU-M					
18 ... 25	63 A, Fuse type gG / 50 A aM	10A	TA75DU-25M	1SAZ321201R2001	0.335
22 ... 32	80 A, Fuse type gG / 63 A aM	10A	TA75DU-32M	1SAZ321201R2002	0.335
29 ... 42	100 A, Fuse type gG / 80 A aM	10A	TA75DU-42M	1SAZ321201R2003	0.335
36 ... 52	125 A, Fuse type gG / 100 A aM	10A	TA75DU-52M	1SAZ321201R2004	0.335
45 ... 63	160 A, Fuse type gG / 125 A aM	10A	TA75DU-63M	1SAZ321201R2005	0.335
60 ... 80	200 A, Fuse type gG / 160 A aM	10A	TA75DU-80M	1SAZ321201R2006	0.370

2CDC106098C0201-revA

Thermal overload relays TA25DU-M / TA42DU-M / TA75DU-M

Technical data

Main circuit – Utilization characteristics according to IEC/EN

Type	TA25DU-M	TA42DU-M	TA75DU-M
Standards	IEC/EN 60947–4–1, IEC/EN 60947-5-1, IEC/EN 60947-1		
Rated operational voltage Ue	690 V AC		
Rated frequency	DC, 50/60 Hz		
Frequency range	0 ... 400 Hz		
Trip class	10A		
Number of poles	3		
Duty time	100 %		
Operating frequency without early tripping	Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"		
Rated impulse withstand voltage Uimp	6 kV		
Rated insulation voltage Ui	690 V AC		

Auxiliary circuit according to IEC/EN

Type		TA25DU-M	TA42DU-M	TA75DU-M
Rated operational voltage Ue		500 V AC, 440 V DC		
Conventional free air thermal current Ith	N.C., 95-96	10 A		
	N.O., 97-98	6 A		
Rated frequency		DC, 50/60 Hz		
Number of poles		1 N.O. + 1 N.C.		
Ie / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category				
110-120 V	N.C., 95-96	3.00 A		
	N.O., 97-98	1.50 A		
220-230-240 V	N.C., 95-96	3.00 A		
	N.O., 97-98	1.50 A		
440 V	N.C., 95-96	1.00 A		
	N.O., 97-98	1.00 A		
480-500 V	N.C., 95-96	1.00 A		
	N.O., 97-98	1.00 A		
Ie / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category				
24 V	N.C., 95-96	1.25 A		
	N.O., 97-98	1.25 A		
60 V	N.C., 95-96	0.25 A		
	N.O., 97-98	0.25 A		
110-120-125 V	N.C., 95-96	0.25 A		
	N.O., 97-98	0.25 A		
250 V	N.C., 95-96	0.12 A		
	N.O., 97-98	0.04 A		
Minimum switching capacity		17 V / 3 mA		
Short-circuit protective device	N.C., 95-96	10 A, Fuse type gG		
	N.O., 97-98	6 A, Fuse type gG		
Rated impulse withstand voltage Uimp		6 kV		
Rated insulation voltage Ui		690 V		

Technical diagram – Intermittent periodic duty

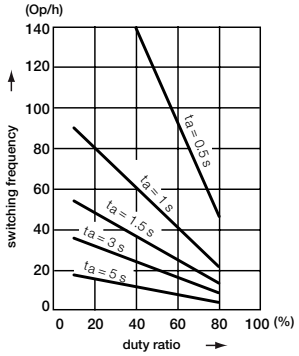

ta: Motor starting time - TA25DU-M, TA42DU-M, TA75DU-M

2CDC106098C0201-revA

Thermal overload relays TA25DU-M / TA42DU-M / TA75DU-M

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA25DU-M / TA42DU-M / TA75DU-M
Standards	UL 508, CSA 22.2 No. 14
Maximum operational voltage	600 V AC/DC
Trip rating	125 % of FLA
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"
Short-circuit protective device	See table "Full load amps and short-circuit protective device"

Auxiliary circuit according to UL/CSA

Type		TA25DU-M / TA42DU-M / TA75DU-M
Contact rating	N.C., 95-96	B600
	N.O., 97-98	C600
Conventional free-air thermal current		5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device			
		480 / 600 V AC		480 / 600 V AC	
		Short circuit rating RMS symmetrical	Fuse K5 / RK5	Short circuit rating RMS symmetrical	Fuse J
TA25DU-0.16M	0.16 A	5000 A	1 A	50000 A	30 A
TA25DU-0.25M	0.25 A	5000 A	1 A	50000 A	30 A
TA25DU-0.4M	0.40 A	5000 A	3 A	50000 A	30 A
TA25DU-0.63M	0.63 A	5000 A	3 A	50000 A	30 A
TA25DU-1.0M	1.0 A	5000 A	6 A	50000 A	30 A
TA25DU-1.4M	1.4 A	5000 A	6 A	50000 A	30 A
TA25DU-1.8M	1.8 A	5000 A	6 A	50000 A	30 A
TA25DU-2.4M	2.4 A	5000 A	10 A	50000 A	30 A
TA25DU-3.1M	3.1 A	5000 A	10 A	50000 A	30 A
TA25DU-4.0M	4.0 A	5000 A	15 A	50000 A	30 A
TA25DU-5.0M	5.0 A	5000 A	20 A	50000 A	30 A
TA25DU-6.5M	6.5 A	5000 A	25 A	50000 A	30 A
TA25DU-8.5M	8.5 A	5000 A	35 A	50000 A	30 A
TA25DU-11M	11 A	5000 A	45 A	50000 A	35 A
TA25DU-14M	14 A	5000 A	60 A	50000 A	60 A
TA25DU-19M	19 A	5000 A	60 A	50000 A	60 A
TA25DU-25M	25 A	5000 A	70 A	50000 A	100 A
TA25DU-32M	32 A	5000 A	100 A	50000 A	100 A
TA42DU-25M	25 A	5000 A	80 A	50000 A	100 A
TA42DU-32M	32 A	5000 A	100 A	50000 A	100 A
TA42DU-42M	42 A	5000 A	150 A	50000 A	200 A
TA75DU-25M	25 A	5000 A	80 A	50000 A	100 A
TA75DU-32M	32 A	5000 A	100 A	50000 A	100 A
TA75DU-42M	42 A	5000 A	150 A	50000 A	200 A
TA75DU-52M	52 A	5000 A	175 A	50000 A	200 A
TA75DU-63M	63 A	10000 A	200 A	50000 A	200 A
TA75DU-80M	80 A	10000 A	250 A	50000 A	200 A

2CDC106098C0201-revA

Thermal overload relays TA25DU-M / TA42DU-M / TA75DU-M

Technical data

General technical data

Type			TA25DU-M	TA42DU-M	TA75DU-M
Pollution degree			3		
Phase loss sensitive			Yes		
Ambient air temperature					
	Operation	Open - compensated	-25 ... +55 °C		
		Open	-25 ... +55 °C		
	Storage		-40 ... +70 °C		
Ambient air temperature compensation			Acc. to IEC/EN60947-4-1		
Maximum operating altitude permissible			2000 m		
Resistance to shock acc. to IEC 60068-2-27			12g / 15 ms		
Mounting position			Position 1-6		
Mounting			Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit on DIN rail (35 mm)		
Degree of protection		Housing	IP20		
		Main circuit terminals	IP10		

Electrical connection - main circuit

Type			TA25DU-M (0.16 ... 11 A)	TA25DU-M (14 ... 25 A)	TA25DU-M (32 A)
Connecting capacity					
	Rigid	1 x	0.75 ... 4 mm²	1.5 ... 6 mm²	1.5 ... 10 mm²
		2 x	0.75 ... 4 mm²	1.5 ... 6 mm²	-
	Flexible with ferrule	1 x or 2 x	0.75 ... 4 mm²	1.5 ... 4 mm²	1.5 ... 6 mm²
	Flexible	1 x or 2 x	0.75 ... 4 mm²	1.5 ... 4 mm²	1.5 ... 6 mm²
	Stranded acc. to UL/CSA	1 x or 2 x	AWG 16-8	AWG 16-8	AWG 10-8
	Flexible acc. to UL/CSA	1 x or 2 x	AWG 16-8	AWG 16-8	AWG 10-8
Stripping length			12 mm	12 mm	15 mm
Tightening torque			1.5 ... 1.9 Nm / 12 in·lb	1.5 ... 1.9 Nm / 12 in·lb	2.5 ... 3.2 Nm / 20 in·lb
Recommended screw driver			M4 (Pozidriv 2)	M4 (Pozidriv 2)	M5 (Pozidriv 2)

Type			TA42DU-M	TA75DU-M
Connecting capacity				
	Rigid	1 x	2.5 ... 25 mm²	
		2 x	2.5 ... 16 mm²	
	Flexible with ferrule	1 x	2.5 ... 25 mm²	
		2 x	2.5 ... 10 mm²	
	Stranded acc. to UL/CSA	1 x or 2 x	AWG 8-1	
	Flexible acc. to UL/CSA	1 x or 2 x	AWG 8-1	
Stripping length			14 mm	
Tightening torque			4.5 Nm / 40 in·lb	
Recommended screw driver			M6 (Pozidriv 2)	

Auxiliary circuit

Type			TA25DU-M	TA42DU-M	TA75DU-M
Connecting capacity					
	Rigid	1 x or 2 x	0.75 ... 4 mm²		
	Flexible	1 x or 2 x	0.75 ... 2.5 mm²		
	Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14		
	Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14		
Stripping length			9 mm		
Tightening torque			1 ... 1.3 Nm / 12 in·lb		
Recommended screw driver			M3.5 (Pozidriv 2)		

2CDC106098C0201-revA

Thermal overload relays TA25DU-M / TA42DU-M / TA75DU-M

Accessories



DX25



DB25/25A



KPR-101L



DB80

The single mounting kits offer the possibility to mount the overload relays separately from the contactor.

For thermal overload relays	Description	Type	Order code		Weight (1 pce) kg
Terminal block and mounting kits					
TA25DU-0.16M; ... 25M / DB25/25 A	Terminal block 10 mm²	DX25	1SAZ201307R0002		0.030
TA25DU-0.16M ... 25M	Single mounting kit	DB25/25A	1SAZ201108R0001		0.055
TA25DU-32M	Single mounting kit	DB25/32A	1SAZ201108R0002		0.080
TA42DU-M / TA75DU-M	Single mounting kit	DB80	1SAZ301110R0001		0.155
Reset push button					
TA25DU-M / TA42DU -M / TA75DU -M	Reset push button*	KPR-101L	1SFA616162R1014		0.027

* The remote reset coil is to be connected to auxiliary contact 97-98 of TA25DU-M.
The coil is not suitable for continuous operation. Impulse duration: maximum 0.2 seconds.

Thermal overload relays TA80DU-M / TA110DU-M

29 to 110 A



TA80DU-M



TA110DU-M



DB80



KPR-101L

The TA80DU-M and TA110DU-M thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- Two electrically isolated auxiliary contacts – 1 N.O. + 1 N.C.
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications

Setting range A	Short-circuit protective device	Trip class	Type	Order code	Weight (1 pce) kg
TA80DU-M					
29 ... 42	100 A, Fuse type gG / 80 A aM	10A	TA80DU-42M	1SAZ331201R2003	0.360
36 ... 52	125 A, Fuse type gG / 100 A aM	10A	TA80DU-52M	1SAZ331201R2004	0.365
45 ... 63	160 A, Fuse type gG / 125 A aM	10A	TA80DU-63M	1SAZ331201R2005	0.365
60 ... 80	200 A, Fuse type gG / 160 A aM	10A	TA80DU-80M	1SAZ331201R2006	0.375
TA110DU-M					
66 ... 90	200 A, Fuse type gG / 160 A aM	10A	TA110DU-90M	1SAZ411201R2001	0.750
80 ... 110	224 A, Fuse type gG / 200 A aM	10A	TA110DU-110M	1SAZ411201R2002	0.755

Ordering details accessories

For thermal overload relays	Description	Type	Order code	Weight (1 pce) kg
TA80DU-M	Single mounting kit	DB80	1SAZ301110R0001	0.155
TA110DU-M	Single mounting kit	DB200	1SAZ401110R0001	0.225
TA80DU-M / TA110DU-M	Reset push button	KPR-101L	1SFA616162R1014	0.027

2CDC106132C0201-revA

Thermal overload relays TA80DU-M / TA110DU-M

Technical data

Main circuit – Utilization characteristics according to IEC/EN

Type		TA80DU-M	TA110DU-M
Standards		IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1	
Rated operational voltage Ue		690 V AC	
Rated frequency		DC, 50/60 Hz	
Frequency range		0 ... 400 Hz	
Trip class		10A	
Number of poles		3	
Duty time		100 %	
Operating frequency without early tripping		Up to 15 operations/h, see "Technical diagram – Intermittent periodic duty"	
Rated impulse withstand voltage Uimp		6 kV	
Rated insulation voltage Ui		690 V AC	

Auxiliary circuit according to IEC/EN

Type		TA80DU-M	TA110DU-M
Rated operational voltage Ue		500 V AC, 440 V DC	
Conventional free air thermal current Ith	N.C., 95-96	10 A	
	N.O., 97-98	6 A	
Rated frequency		DC, 50/60 Hz	
Number of poles		1 N.O. + 1 N.C.	
Ie / Rated operational current AC-15 acc. to IEC/EN 60947-5-1 for utilization category			
110-120 V	N.C., 95-96	3.00 A	
	N.O., 97-98	1.50 A	
220-230-240 V	N.C., 95-96	3.00 A	
	N.O., 97-98	1.50 A	
440 V	N.C., 95-96	1.00 A	
	N.O., 97-98	1.00 A	
480-500 V	N.C., 95-96	1.00 A	
	N.O., 97-98	1.00 A	
Ie / Rated operational current DC-13 acc. to IEC/EN 60947-5-1 for utilization category			
24 V	N.C., 95-96	1.25 A	
	N.O., 97-98	1.25 A	
60 V	N.C., 95-96	0.25 A	
	N.O., 97-98	0.25 A	
110-120-125 V	N.C., 95-96	0.25 A	
	N.O., 97-98	0.25 A	
250 V	N.C., 95-96	0.12 A	
	N.O., 97-98	0.04 A	
Minimum switching capacity		17 V / 3 mA	
Short-circuit protective device	N.C., 95-96	10 A, Fuse type gG	
	N.O., 97-98	6 A, Fuse type gG	
Rated impulse withstand voltage Uimp		6 kV	
Rated insulation voltage Ui		690 V	

Technical diagram – Intermittent periodic duty

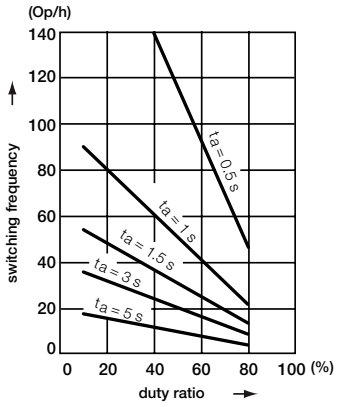

ta: Motor starting time - TA80DU-M, TA110DU-M

Thermal overload relays TA80DU-M / TA110DU-M

Technical data

Main circuit – Utilization characteristics according to UL/CSA

Type	TA80DU-M	TA110DU-M
Standards	UL 508, CSA 22.2 No. 14	
Maximum operational voltage	600 V AC/DC	
Trip rating	125 % of FLA	
Full load amps (FLA)	See table "Full load amps and short-circuit protective device"	
Short-circuit rating RMS symmetrical	See table "Full load amps and short-circuit protective device"	
Short-circuit protective device	See table "Full load amps and short-circuit protective device"	

Auxiliary circuit according to UL/CSA

Type		TA80DU-M / TA110DU-M
Contact rating	N.C., 95-96	B600
	N.O., 97-98	C600
Conventional free-air thermal current		5 A

Full load amps and short-circuit protective device

Type	Full load amps (FLA)	Short-circuit protective device			
		480 / 600 V AC		480 / 600 V AC	
		Short circuit rating RMS symmetrical	Fuse K5 / RK5	Short circuit rating RMS symmetrical	Fuse J
TA80DU-42M	42 A	5000 A	150 A	50000 A	200 A
TA80DU-52M	52 A	5000 A	175 A	50000 A	200 A
TA80DU-63M	63 A	10000 A	200 A	50000 A	200 A
TA80DU-80M	80 A	10000 A	250 A	50000 A	200 A
TA110DU-90M	90 A	10000 A	250 A	65000 A	200 A
TA110DU-110M	110 A	10000 A	250 A	65000 A	200 A

2CDC106134C0201-revA

Thermal overload relays TA80DU-M / TA110DU-M

Technical data

General technical data

Type			TA80DU-M	TA110DU-M
Pollution degree			3	
Phase loss sensitive			Yes	
Ambient air temperature				
	Operation	Open - compensated	-25 ... +55 °C	
		Open	-25 ... +55 °C	
	Storage		-40 ... +70 °C	
Ambient air temperature compensation			Acc. to IEC/EN60947-4-1	
Maximum operating altitude permissible			2000 m	
Resistance to shock acc. to IEC 60068-2-27			12g / 15 ms	
Mounting position			Position 1-6	
Mounting			Mount on the contactor and tighten the screws of the main circuit terminals or with single mounting kit	
Degree of protection		Housing	IP20	
		Main circuit terminals	IP10	

Electrical connection - Main circuit

Type			TA80DU-M	TA110DU-M
Connecting capacity				
	Rigid	1 x	2.5 ... 25 mm²	16 ... 35 mm²
		2 x	2.5 ... 16 mm²	-
	Flexible with ferrule	1 x	2.5 ... 25 mm²	16 ... 35 mm²
		2 x	2.5 ... 10 mm²	-
	Lugs		-	-
	Stranded acc. to UL/CSA	1 x or 2 x	AWG 8-1	AWG 6-2/0
	Flexible acc. to UL/CSA	1 x or 2 x	AWG 8-1	AWG 6-2/0
Stripping length			14 mm	25 mm
Tightening torque			4.5 Nm / 40 lb.in	7.2 ... 9.6 Nm
Recommended screw driver			M6 (Pozidriv 2)	M8 (Hexagon 4)

Auxiliary circuit

Type			TA80DU-M	TA110DU-M
Connecting capacity				
	Rigid	1 x or 2 x	0.75 ... 4 mm²	
	Flexible with ferrule	1 x or 2 x	0.75 ... 2.5 mm²	
	Flexible	1 x or 2 x	0.75 ... 2.5 mm²	
	Stranded acc. to UL/CSA	1 x or 2 x	AWG 18-14	
	Flexible acc. to UL/CSA	1 x or 2 x	AWG 18-14	
Stripping length			9 mm	
Tightening torque			1 ... 1.3 Nm / 12 lb.in	
Recommended screw driver			M3.5 (Pozidriv 2)	

2CDC106135C0201I-revA

Thermal overload relays TA25DU-M / TA42DU-M / TA75DU-M

Dimensions

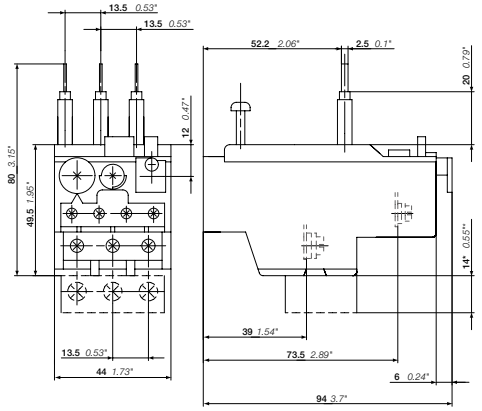

TA25DU-M + DX25



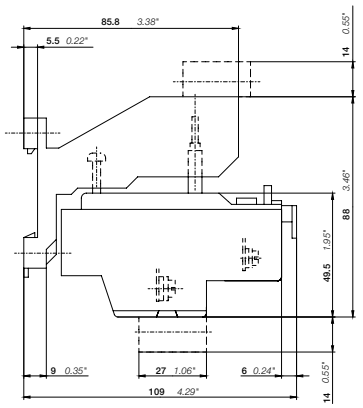



TA25DU-M + DB25 + DX25

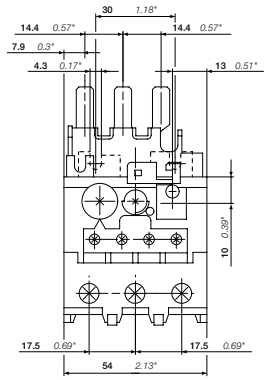

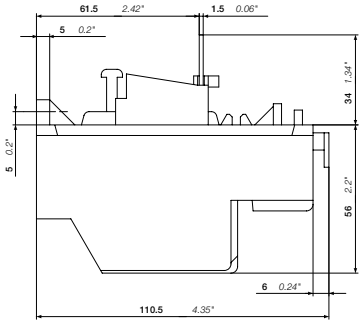

TA42DU-M

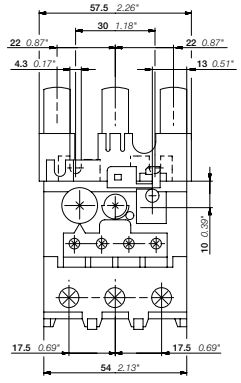

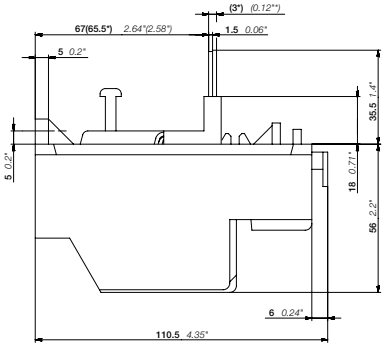

TA75DU-M



TA75DU-M + DB80
TA42DU-M + DB80

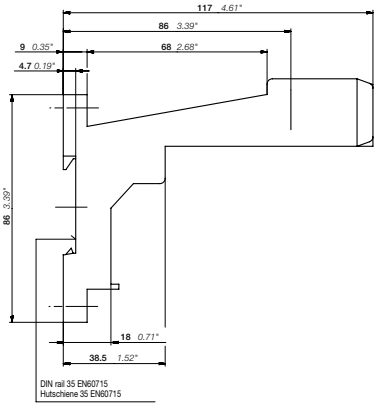

Main dimensions mm, inches

Thermal overload relays TA80DU-M / TA110DU-M

Dimensions

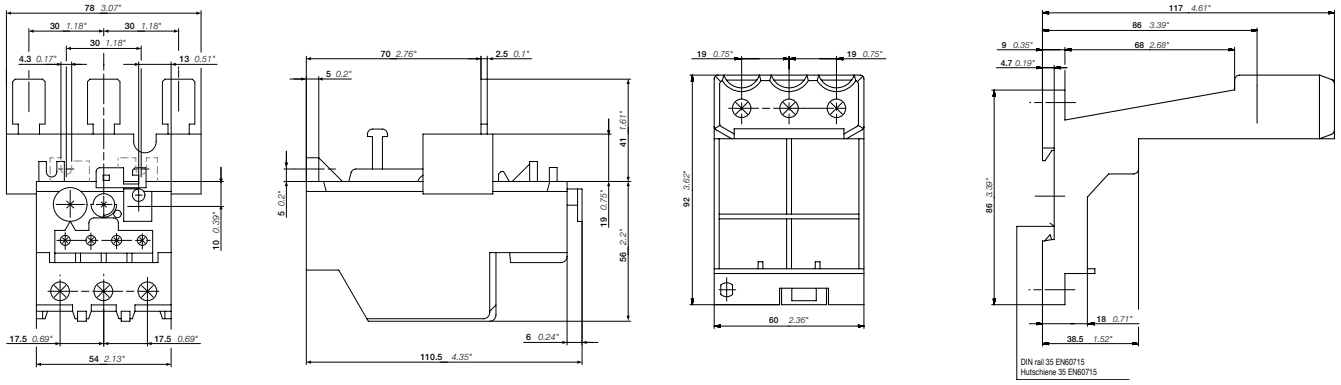

TA80DU-M

TA80DU-M + DB80

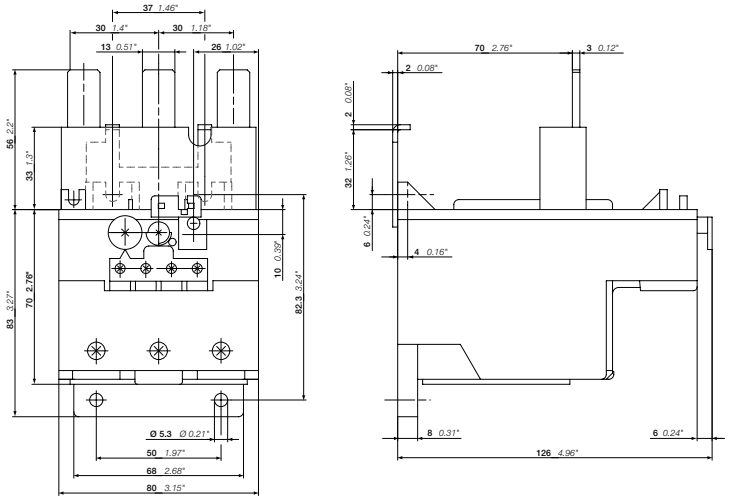

TA110DU-M

Main dimensions mm, inches

General technical data

102 **Coordination with short-circuit protection devices**
103 **Terms and technical definitions**
105 **Standards and utilization categories**
107 **Degrees of protection**

Coordination with short-circuit protection devices

In compliance with standards IEC 60947-4-1 and EN 60947-4-1, we define for the contactors and starters the type, rating and characteristics of the short-circuit protection devices SCPD which allow selective protection against overloads and ensure protection against short circuits.

Basic functions

Any starter is designed to:
- start motors,
- ensure continuous functioning of motors,
- disconnect motors from the supply line,
- guarantee protection of motors against overloads.

The starter is typically made up of a switching device (contactor) and an overload protection device (thermal overload relay or electronic overload relay).

These two devices MUST be coordinated with equipment capable of providing protection against short circuit (SCPD: short circuit protective device): typically a circuit breaker with magnetic release only or a switch fuse. These are not necessarily part of the starter.

Applicable standards

IEC 60947-4-1 (EN 60947-4-1) and UL 60947-4-1 between the branch circuit protective device and the motor starter precisely defines the different points to be considered in order to carry out correct coordination.

Complete coordination for a combination includes the following points:
- Selectivity test between the overload relay and the short-circuit protection device SCPD.
- Short-circuit condition tests:
- at prospective "r" currents - These currents depend on the rated operational current of the starter (Ie AC-3) and are given by the standard (Table 13). For example:
  r = 1kA for Ie AC-3 < 16 A
  r = 3 kA for 16 A < Ie AC-3 < 63 A
  r = 5 kA for 63 A < Ie AC-3 < 125 A etc.
- at the rated conditional short-circuit current "Iq" - This is the maximum prospective current that the combination can withstand, for example 50 kA.

Types of coordination

IEC 60947-4-1 (EN 60947-4-1) UL 60947-4-1 between the branch circuit protective device and the motor starter defines two types of coordination according to the expected level of service continuity. Acceptable extreme damage for the switchgear is divided into two types.
- Type 1: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will not be able to then operate without being repaired or having parts replaced.
- Type 2: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will be able to operate afterwards. The risk of contacts light welding is acceptable. In this case, the manufacturer must stipulate the measures to be taken with respect to maintenance of the equipment.

The complete ABB offer

ABB has acquired years of experience with respect to problems of coordination and is able to make a complete offer based on tests performed in its qualified laboratories.
This offer includes 400 V, 500 V, 690 V networks.

A complete data base of coordination tables, according to IEC 60947-4-1 (EN 60947-4-1), is available on the ABB Website.

In the coordination tables the following short-circuit protection devices are recommended:
- Moulded case circuit-breakers (MCCBs)
- Miniature circuit-breakers (MCBs)
- Switch-disconnector-fuses (aM, gG and BS)
- Manual Motor Starters (MMS).

General remarks applicable to all tables

• Each table is defined for a maximum ambient temperature of 40 °C. For higher temperatures, apply a derating factor according to the following rules:

- Fuses: factor of 0.8 applied to In for an ambient temperature of 70 °C
- MCCBs and MCBs: factor of 0.8 applied to In for an ambient temperature of 60 °C
- The starter derating factor depends on the operating conditions of thermal overload relays:

  Factor of 0.9 applied to In for an ambient temperature of 70 °C.
- Each table is defined for motor currents: 3-phase motors, 4-pole
- **Normal starting** means a starting time < 2 s.
- **Difficult starting** means an accelerating time 10 s < **ts** < 30 s

  Tripping classes of thermal overload relays according to IEC 60947-4-1 (EN 60947-4-1): 10A and 10
  Tripping classes of electronic overload relays according to IEC 60947-4-1 (EN 60947-4-1): 10E, 20E, 30E selectable
- In the tables with MCCBs, these are fitted with the magnetic relay alone. Setting is always carried out at > 12.3 Ie AC-3 so that the transient current peak occurring during starting does not lead to tripping.

1SBC101590S0201-revA

Terms and technical definitions

Circuits
- auxiliary circuit: All the conductive parts of a contactor designed to be inserted in a different circuit from the main circuit and the contactor control circuits.
- control circuit: All the conductive parts of a contactor (other than the main circuit and the auxiliary circuit) used to control the contactor's closing operation or opening operation or both.
- main circuit: All the conductive parts of a contactor designed to be inserted in the circuit that it controls.

Thermal overload relay tripping classes
IEC 60947-4-1 defines tripping classes 10 A, 10, 20 and 30. Types 10 A, 10, etc. correspond to the maximum tripping time for a making current at 7.2 times the setting current. Furthermore, for each class the standard specifies the tripping time for 1.5 times the setting current and sets the non tripping condition at 1.05 times the setting current. All these data are summarized in the table below.

Extract from IEC 60947-4-1:

Tripping class		10 A	10	20	30
Max. tripping time for 1.5 times the setting current (warm state)	s	120	240	480	720
Tripping time for 7.2 times the setting current (cold state)	s	2 - 10	4 - 10	6 - 20	9 - 30
For 1.05 times the setting current		No tripping			

Coordination of protections against short circuit
The goal here is to protect electromechanical starters and softstarters.
Any starter is designed to:
- start motors,
- ensure continuous functioning of motors,
- disconnect motors from the supply line,
- guarantee protection of motors against overloads.

The starter is typically made up of a switching device (contactor) and an overload protection device (thermal overload relay or electronic overload relay). These two devices MUST be coordinated with equipment capable of providing protection against short circuit (SCPD: short circuit protective device): typically a circuit breaker with magnetic release only or a switch fuse. These are not necessarily part of the starter.

The characteristics of the starter must comply with the international standard IEC 60947-4-1 which defines the above items as follows:
contactor: a mechanical switching device having only one position of rest, operated otherwise than by hand, capable of making, carrying and breaking currents under normal circuit conditions including overload conditions.
overload release: overload relay or release which operates in the case of overload and also in case of loss of phase.
circuit-breaker: defined by IEC 60947-2 as a mechanical switching device, capable of making, carrying and breaking currents under normal circuit conditions and also making, carrying for a specified time and breaking currents under specified abnormal circuit conditions.
IEC publication 60947-4-1 defines coordination types "1" and "2":
- Type "1" coordination requires that, in the event of a short-circuit, the contactor or starter does not endanger persons or installations and will not then be able to operate without being repaired or parts being replaced.
- Type "2" coordination requires that, in short-circuit conditions, the contactor or starter does not endanger persons or installations and will be able to operate afterwards. The risk of contacts being light welded is acceptable. In this case, the manufacturer must stipulate the measures to be taken with respect to maintenance of the equipment.

Rated operational current Ie.
Current rated by the manufacturer. It is mainly based on the rated operational voltage Ue, the rated frequency, the utilization category, the rated duty and the type of protective enclosure, if necessary.

Conventional free air thermal current Ith
Current that the contactor can withstand in free air for a duty time of 8 hours without the temperature rise of its various parts exceeding the maximum values given by the standard.

Operating cycle or cycle
Includes one making operation and one breaking operation.

Cycle time
This is the sum of the current flow time and the no-current time for given cycle.

1SBC100036S0201-revA

Terms and technical definitions

Electrical durability
Number of on-load operating cycles that the contactor is able to carry out. It depends on the operational current, the operational voltage and the utilization category.

Mechanical durability
Number of no-current operating cycles that a contactor is able to carry out.

Assessed failure rate
Defined according to IEC 60947-5-4. This rate is given in standard industrial environments for the contactor relays and for the built-in auxiliary contact of contactors.

Load factor
Ratio of the on-load operating time to the total cycle time x 100.

Switching frequency
Number of switching cycles per hour.

Plugging
Stopping or fast reversal in rotation direction of a motor by two supply leads being interchanged while the motor is running.

Inching
Energization of a motor's circuit repeatedly or for short periods with the aim of obtaining small movements of the driven mechanism.

Coil operating limits
Expressed in multiples of the nominal control circuit voltage Uc for the upper and lower limits.

Mounting position
Comply with the manufacturer's instructions. Restrictions are to be taken into account for certain mounting positions.

Rated breaking or making capacity
Root mean square (r.m.s.) value of the current that the contactor is able to break or make at a given voltage according to the conditions specified by standards and for a given utilization category.

Intermittent duty
Duty during which the contactor is successively closed or open for periods which are too short to enable the contactor to achieve thermal balance.

Ambient temperature
Air temperature close to the contactor.

Time
- Time constant: Ratio of the inductance to the resistance (L/R = mH/Ω = ms).
- Short-time withstand current: Current that the contactor is able to withstand in closed position for a short time interval and in specified conditions.
- Closing time: Time interval between the coil energization and the instant the contacts touch on all the poles.
- Opening time: Time interval between the coil de-energization and the instant the contacts separate on all the poles.

Rated control voltage Uc
Control voltage value for which the control circuit is sized.

Rated operational voltage Ue
Voltage to which the contactor's utilization characteristics refer. In three-phase it is the phase-to-phase voltage.

Rated insulation voltage Ui
Reference voltage for dielectric tests and creepage distances.

Rated impulse withstand voltage Uimp
Peak value of an impulse voltage, having a specified form and polarity, which does not cause breakdown in specific test conditions.

Shock withstand
Requirement for vehicles, crane drives, installations on board ships and plug-in equipment. For the acceptable "g" values, the contacts must not change position and the thermal overload relays must not trip.

Resistance to vibrations
Requirements for vehicles, boats and other means of transport. For the specified vibration amplitude and frequency values the device must remain able to operate.

1SBC100036S0201-revA

Standards and utilization categories

Utilization categories:

A contactor's duty is characterised by the utilization category together with the rated operational voltage and current indicated.

Utilization categories for contactors according to IEC 60947-4-1:

Alternating current:	AC-1	Non-inductive or slightly inductive loads, resistance furnaces.
	AC-2	Slip-ring motors: starting, switching off.
	AC-3	Cage motors: starting, switching off running motors.
	AC-4	Cage motors: starting, plugging, inching.
	AC-5a	Discharge lamp switching.
	AC-5b	Incandescent lamp switching.
	AC-6a	Transformer switching.
	AC-6b	Capacitor bank switching.
	AC-8a	Hermetic refrigeration compressor motor control with manual resetting of overload releases.
	AC-8b	Hermetic refrigeration compressor motor control with automatic resetting of overload releases.
Direct current:	DC-1	Non inductive or slightly inductive loads, resistance furnaces.
	DC-3	Shunt motors: starting, plugging, inching, dynamic breaking of DC motors.
	DC-5	Series motors: starting, plugging, inching, dynamic breaking of DC motors.
	DC-6	Incandescent lamp switching.

Utilization categories for contactor relays according to IEC 60947-5-1:

Alternating current:	AC-12	Control of resistive loads and static loads with opto-coupler isolation.
	AC-13	Control of static loads with transformer isolation.
	AC-14	Control of weak electromagnetic loads (≤ 72 VA).
	AC-15	Control of electromagnetic loads (> 72 VA).
Direct current:	DC-12	Control of resistive loads and static loads with opto-coupler isolation.
	DC-13	Control of DC electromagnets.
	DC-14	Control of DC electromagnets having economy resistors.

In fact some applications, and the specific criteria characterizing the various loads controlled by contactors, may modify the utilization characteristics of the contactors. The main applications concerned are:

Capacitor bank switching

Account must be taken of high peaks when the current is made and of harmonic currents during continuous duty. For this application, IEC publication 60947-4-1 stipulates utilization category AC-6b. The operational currents or powers acceptable for the contactors are determined by our electrical tests; IEC publication 60947-4-1 gives the calculating formula for determining the operational current (Table 9).

Transformer switching

Account must be taken of the peaks due to magnetization phenomena when the current is made.
For this application, IEC publication 60947-4-1 stipulates utilization category AC-6a. The operational currents or powers acceptable for the contactors are determined using the values obtained for AC-3 or AC-4 category tests and the calculating formula given in IEC 60947-4-1 (Table 9).

Lighting circuit switching

The current peaks occurring on energization of the circuit and the power factor depend on the type of lamps, the connection mode and whether or not there is compensation.
For this application, IEC publication 60947-4-1 stipulates two standard utilization categories:
AC-5a for discharge lamp switching.
AC-5b for incandescent lamp switching.

Slip-ring motor switching

The contactors used for short-circuiting rotor resistors can be used for rotor voltages up to 2 times the rated operational voltage.
The conditions of use of rotor contactors depend on the connection mode of the main poles. IEC 60947-4-1 stipulates AC-2 utilization category for startor contactor.

1SBC101626S0201-revA

Standards and utilization categories

Utilization categories (cont.)

DC power circuit switching

Arc suppression is more difficult in direct current than in alternating current. Higher the time constant and voltage, heavier the breaking conditions: consequently several poles have to be connected in series.

AC high current circuit switching

Possibility of increasing performances by connecting poles in parallel.

Circuit switching during temporary and intermittent duty

In these cases higher operational currents are acceptable.

Influence of the length of the conductors used in the contactor control circuit

According to the operational voltages, the cross-sectional areas, the coil consumption and the control layout, difficulties due to line resistances and capacitances may appear during contactor closing and opening orders.

Making and breaking conditions for utilization categories

Utilization category		Durability test conditions						Occasional operation Making and breaking capacities - 50 operating cycles					
		Making conditions			Breaking conditions			Making conditions			Breaking conditions		
		I/Ie	U/Ue	Cos. ϕ or L/R (ms)	I/Ie	U/Ue	Cos. ϕ or L/R (ms)	Ic/Ie	Ur/Ue	Cos. ϕ or L/R (ms)	Ic/Ie	Ur/Ue	Cos. ϕ or L/R (ms)
Contactors for AC circuit switching													
AC-1		1	1	0.95	1	1	0.95	1.5	1.05	0.8	1.5	1.05	0.8
AC-2		2.5	1	0.65	2.5	1	0.65	4	1.05	0.65	4	1.05	0.65
AC-3	Ie < 17 A	6	1	0.65	1	0.17	0.65	10	1.05	0.45	8	1.05	0.45
	17 < Ie < 100 A	6	1	0.35	1	0.17	0.35	10	1.05	0.45	8	1.05	0.45
	Ie > 100 A	6	1	0.35	1	0.17	0.35	10	1.05	0.35	8	1.05	0.35
AC-4	Ie < 17 A	6	1	0.65	6	1	0.65	12	1.05	0.45	10	1.05	0.45
	17 < Ie < 100 A	6	1	0.35	6	1	0.35	12	1.05	0.45	10	1.05	0.45
	Ie > 100 A	6	1	0.35	6	1	0.35	12	1.05	0.35	10	1.05	0.35
Contactors for DC circuit switching													
DC-1		1	1	1	1	1	1	1.5	1.05	1	1.5	1.05	1
DC-3		2.5	1	2	2.5	1	2	4	1.05	2.5	4	1.05	2.5
DC-5		2.5	1	7.5	2.5	1	7.5	4	1.05	15	4	1.05	15
Contactor relays for AC circuit switching													
AC-14	(≤ 72 VA)	–	–	–	–	–	–	6	1.1	0.7	6	1.1	0.7
AC-15	(> 72 VA)	10	1	0.7	1	1	0.4	10	1.1	0.3	10	1.1	0.3

Contactor relays for DC circuit switching

Utilization category	Standard operation						Occasional operation Making and breaking capacities - 50 operating cycles					
	Making conditions			Breaking conditions			Making conditions			Breaking conditions		
	I/Ie	U/Ue	T0.95	I/Ie	U/Ue	T0.95	Ic/Ie	Ur/Ue	T0.95	Ic/Ie	Ur/Ue	T0.95
DC-13	1	1	6 P(1)	1	1	6 P(1)	1.1	1.1	6 P(1)	1.1	1.1	6 P(1)
DC-14	–	–	–	–	–	–	10	1.1	15 ms	10	1.1	15 ms

(1) The value "6 x P" is the result of an empirical relation which is estimated to represent most DC magnetic loads up to the highest limit of P = 50 W (6 x P = 300 ms). It is accepted that loads having drawn energy above 50 W are made up of weaker loads in parallel. As a consequence, the 300 ms value must form the highest limit whatever the value of the power drawn.

Key:

U (I) = applied voltage (current)
Ur = recovery voltage
L/R = test circuit time constant
Ue (Ie) = rated operational voltage (current)
Ic = making and breaking current expressed in DC or in AC like the r.m.s. value of the symmetrical components
T0.95 = time required to reach 95 % of the current in steady-state conditions, expressed in milliseconds

1SBC101626S0201-revA

Degrees of protection

General

In an installation, the degree of protection required for electrical equipment depends on the environmental characteristics. The degree of protection, ensured by the enclosure of equipment or by the cubicle containing the equipment is expressed by the IP code which gives the level of protection against access to hazardous parts, the ingress of foreign bodies and/or the ingress of water, in compliance with IEC 60529, IEC 60947-1.

Besides the IP symbol, the complete code has two figures followed (optionally) by two additional letters. A short description of the elements used in IP coding is given below.

IP... code	Figures or letters	Specifications for installation protection	Protection of persons
First figure		**Against ingress of foreign bodies**	**Against access to hazardous parts with:**
	0	No protection	No protection
	1	Diameter > 50 mm	Back of hand
	2	Diameter > 12.5 mm	Finger
	3	Diameter > 2.5 mm	Tool
	4	Diameter > 1 mm	Wire
	5	Limited protection against dust	Wire
	6	Total protection against dust	Wire
Second figure		**Against entrance of water having a harmful effect**	
	0	No protection	
	1	Vertical dripping	
	2	Dripping at a vertical angle of < 15°	
	3	Rain at a vertical angle of < 60°	
	4	Splashing	
	5	Low pressure water jet	
	6	Powerful water jets	
	7	Temporary immersion	
	8	Permanent immersion	
Additional letter (optional) for use with:		**Against ingress of foreign bodies**	**Against access to hazardous parts with:**
First figure 0	**A**	Stopped by a barrier with a 50 mm Ø sphere	Back of hand
First figure 0 or 1	**B**	Entrance of test finger limited to 80 mm	Finger
First figure 1 or 2	**C**	Wire with 2.5 mm Ø and length of 100 mm	Tool
First figure 2 or 3	**D**	Wire with 1 mm Ø and length of 100 mm	Wire
Additional letter (optional)		**Specific additional information**	
	H	High voltage apparatus	–
	M	Moving parts which are moving during water test	
	S	Moving parts which are stationary during water test	
	W	Specified atmospheric conditions	

Note: The type of enclosure or cubicle in which the equipment must be installed prevails with respect to the degree of protection.

1SBC101627502001

Index

Order code	Type	Page
1SAM101923R0002	MSMN (3)	25
1SAM101923R0012	MSMNO (4)	25
1SAM201901R1001	HKF1-11	18
1SAM201901R1002	HKF1-20	18
1SAM201901R1003	HKF1-10	18
1SAM201901R1004	HKF1-01	18
1SAM201902R1001	HK1-11	18
1SAM201902R1002	HK1-20	18
1SAM201902R1003	HK1-02	18
1SAM201902R1004	HK1-20L	18
1SAM201903R1001	SK1-11	18
1SAM201903R1002	SK1-20	18
1SAM201903R1003	SK1-02	18
1SAM201904R1001	UA1-24	19
1SAM201904R1002	UA1-48	19
1SAM201904R1003	UA1-60	19
1SAM201904R1004	UA1-110	19
1SAM201904R1005	UA1-230	19
1SAM201904R1006	UA1-400	19
1SAM201904R1007	UA1-415	19
1SAM201904R1008	UA1-208	19
1SAM201904R1009	UA1-575	19
1SAM201904R1010	UA1-20	19
1SAM201906R1102	PS1-2-0-65	22
1SAM201906R1103	PS1-3-0-65	22
1SAM201906R1104	PS1-4-0-65	22
1SAM201906R1105	PS1-5-0-65	22
1SAM201906R1112	PS1-2-1-65	22
1SAM201906R1113	PS1-3-1-65	22
1SAM201906R1114	PS1-4-1-65	22
1SAM201906R1115	PS1-5-1-65	22
1SAM201906R1122	PS1-2-2-65	22
1SAM201906R1123	PS1-3-2-65	22
1SAM201906R1124	PS1-4-2-65	22
1SAM201906R1125	PS1-5-2-65	22
1SAM201907R1101	S1-M1-25	22
1SAM201907R1102	S1-M2-25	22
1SAM201907R1103	S1-M3-25	22
1SAM201908R1001	BS1-3	22
1SAM201909R1001	FS116	22
1SAM201909R1021	MSAH1	25
1SAM201910R1001	AA1-24	19
1SAM201910R1002	AA1-110	19
1SAM201910R1003	AA1-230	19
1SAM201910R1004	AA1-400	19
1SAM201911R1010	IB132-G	24
1SAM201911R1011	IB132-Y	24
1SAM201912R1010	DMS132-G	24
1SAM201912R1011	DMS132-Y	24
1SAM201913R1103	S1-M3-35	22
1SAM201914R1001	PB1-1-32	22
1SAM201914R1002	S1-PB1-25	22
1SAM201916R1103	PS1-3-0-100	22
1SAM201916R1104	PS1-4-0-100	22
1SAM201916R1105	PS1-5-0-100	22
1SAM201916R1113	PS1-3-1-100	22
1SAM201916R1114	PS1-4-1-100	22
1SAM201916R1115	PS1-5-1-100	22
1SAM201916R1123	PS1-3-2-100	22
1SAM201920R1000	MSH-AR	25
1SAM201920R1001	MSHD-LB (1)	25
1SAM201920R1002	MSHD-LY (1)	25
1SAM201920R1011	MSHD-LTB (2)	25
1SAM201920R1012	MSHD-LTY(2)	25
1SAM250000R1001	MS116-0.16	13
1SAM250000R1002	MS116-0.25	13
1SAM250000R1003	MS116-0.4	13
1SAM250000R1004	MS116-0.63	13
1SAM250000R1005	MS116-1.0	13
1SAM250000R1006	MS116-1.6	13
1SAM250000R1007	MS116-2.5	13
1SAM250000R1008	MS116-4.0	13
1SAM250000R1009	MS116-6.3	13
1SAM250000R1010	MS116-10	13
1SAM250000R1011	MS116-16	13
1SAM250000R1012	MS116-12	13
1SAM250000R1013	MS116-20	13
1SAM250000R1014	MS116-25	13
1SAM250000R1015	MS116-32	13
1SAM250005R1001	MS116-0.16-HKF1-11	13
1SAM250005R1002	MS116-0.25-HKF1-11	13
1SAM250005R1003	MS116-0.4-HKF1-11	13
1SAM250005R1004	MS116-0.63-HKF1-11	13
1SAM250005R1005	MS116-1.0-HKF1-11	13
1SAM250005R1006	MS116-1.6-HKF1-11	13
1SAM250005R1007	MS116-2.5-HKF1-11	13
1SAM250005R1008	MS116-4.0-HKF1-11	13
1SAM250005R1009	MS116-6.3-HKF1-11	13
1SAM250005R1010	MS116-10.0-HKF1-11	13
1SAM250005R1011	MS116-16.0-HKF1-11	13
1SAM250005R1012	MS116-12.0-HKF1-11	13
1SAM250005R1013	MS116-20-HKF1-11	13
1SAM250005R1014	MS116-25-HKF1-11	13
1SAM250005R1015	MS116-32-HKF1-11	13
1SAZ201108R0001	DB25/25A	93
1SAZ201108R0002	DB25/32A	93
1SAZ201307R0002	DX25	93
1SAZ211201R2005	TA25DU-0.16M	89
1SAZ211201R2009	TA25DU-0.25M	89
1SAZ211201R2013	TA25DU-0.4M	89
1SAZ211201R2017	TA25DU-0.63M	89
1SAZ211201R2021	TA25DU-1.0M	89
1SAZ211201R2023	TA25DU-1.4M	89
1SAZ211201R2025	TA25DU-1.8M	89
1SAZ211201R2028	TA25DU-2.4M	89
1SAZ211201R2031	TA25DU-3.1M	89
1SAZ211201R2033	TA25DU-4.0M	89
1SAZ211201R2035	TA25DU-5.0M	89
1SAZ211201R2038	TA25DU-6.5M	89
1SAZ211201R2040	TA25DU-8.5M	89
1SAZ211201R2043	TA25DU-11M	89
1SAZ211201R2045	TA25DU-14M	89
1SAZ211201R2047	TA25DU-19M	89
1SAZ211201R2051	TA25DU-25M	89
1SAZ211201R2053	TA25DU-32M	89
1SAZ301110R0001	DB80	93, 94
1SAZ311201R2001	TA42DU-25M	89
1SAZ311201R2002	TA42DU-32M	89
1SAZ311201R2003	TA42DU-42M	89
1SAZ321201R2001	TA75DU-25M	89
1SAZ321201R2002	TA75DU-32M	89
1SAZ321201R2003	TA75DU-42M	89
1SAZ321201R2004	TA75DU-52M	89
1SAZ321201R2005	TA75DU-63M	89
1SAZ321201R2006	TA75DU-80M	89
1SAZ331201R2003	TA80DU-42M	94
1SAZ331201R2004	TA80DU-52M	94
1SAZ331201R2005	TA80DU-63M	94
1SAZ331201R2006	TA80DU-80M	94
1SAZ401110R0001	DB200	94
1SAZ411201R2001	TA110DU-90M	94
1SAZ411201R2002	TA110DU-110M	94
1SBH901074R2622	NX22E-26	58
1SBH901074R2631	NX31E-26	58
1SBH901074R2640	NX40E-26	58
1SBH901074R7522	NX22E-75	58
1SBH901074R7531	NX31E-75	58
1SBH901074R7540	NX40E-75	58
1SBH901074R8122	NX22E-81	58
1SBH901074R8131	NX31E-81	58
1SBH901074R8140	NX40E-81	58
1SBH901074R8522	NX22E-85	58
1SBH901074R8531	NX31E-85	58
1SBH901074R8540	NX40E-85	58
1SBL281074R2601	AX32-30-01-26	30
1SBL281074R2610	AX32-30-10-26	30
1SBL281074R7501	AX32-30-01-75	30
1SBL281074R7510	AX32-30-10-75	30
1SBL281074R8101	AX32-30-01-81	30
1SBL281074R8110	AX32-30-10-81	30
1SBL281074R8501	AX32-30-01-85	30
1SBL281074R8510	AX32-30-10-85	30
1SBL321074R2601	AX40-30-01-26	30
1SBL321074R2610	AX40-30-10-26	30
1SBL321074R7501	AX40-30-01-75	30
1SBL321074R7510	AX40-30-10-75	30
1SBL321074R8101	AX40-30-01-81	30
1SBL321074R8110	AX40-30-10-81	30
1SBL321074R8501	AX40-30-01-85	30
1SBL321074R8510	AX40-30-10-85	30
1SBL351074R2600	AX50-30-00-26	31
1SBL351074R2611	AX50-30-11-26	32
1SBL351074R7500	AX50-30-00-75	31
1SBL351074R7511	AX50-30-11-75	32
1SBL351074R8100	AX50-30-00-81	31
1SBL351074R8111	AX50-30-11-81	32
1SBL351074R8500	AX50-30-00-85	31
1SBL351074R8511	AX50-30-11-85	32
1SBL371074R2600	AX65-30-00-26	31
1SBL371074R2611	AX65-30-11-26	32
1SBL371074R7500	AX65-30-00-75	31
1SBL371074R7511	AX65-30-11-75	32
1SBL371074R8100	AX65-30-00-81	31
1SBL371074R8111	AX65-30-11-81	32
1SBL371074R8500	AX65-30-00-85	31
1SBL371074R8511	AX65-30-11-85	32
1SBL411074R2600	AX80-30-00-26	31
1SBL411074R2611	AX80-30-11-26	32
1SBL411074R7500	AX80-30-00-75	31
1SBL411074R7511	AX80-30-11-75	32
1SBL411074R8100	AX80-30-00-81	31
1SBL411074R8111	AX80-30-11-81	32
1SBL411074R8500	AX80-30-00-85	31
1SBL411074R8511	AX80-30-11-85	32
1SBL901074R2601	AX09-30-01-26	28
1SBL901074R2610	AX09-30-10-26	28
1SBL901074R7501	AX09-30-01-75	28
1SBL901074R7510	AX09-30-10-75	28
1SBL901074R8101	AX09-30-01-81	28
1SBL901074R8110	AX09-30-10-81	28
1SBL901074R8501	AX09-30-01-85	28
1SBL901074R8510	AX09-30-10-85	28
1SBL911074R2601	AX12-30-01-26	28
1SBL911074R2610	AX12-30-10-26	28
1SBL911074R7501	AX12-30-01-75	28
1SBL911074R7510	AX12-30-10-75	28
1SBL911074R8101	AX12-30-01-81	28
1SBL911074R8110	AX12-30-10-81	28
1SBL911074R8501	AX12-30-01-85	28
1SBL911074R8510	AX12-30-10-85	28
1SBL921074R2601	AX18-30-01-26	29
1SBL921074R2610	AX18-30-10-26	29
1SBL921074R7501	AX18-30-01-75	29
1SBL921074R7510	AX18-30-10-75	29
1SBL921074R8101	AX18-30-01-81	29
1SBL921074R8110	AX18-30-10-81	29
1SBL921074R8501	AX18-30-01-85	29
1SBL921074R8510	AX18-30-10-85	29
1SBL931074R2601	AX25-30-01-26	29
1SBL931074R2610	AX25-30-10-26	29
1SBL931074R7501	AX25-30-01-75	29
1SBL931074R7510	AX25-30-10-75	29
1SBL931074R8101	AX25-30-01-81	29
1SBL931074R8110	AX25-30-10-81	29
1SBL931074R8501	AX25-30-01-85	29
1SBL931074R8510	AX25-30-10-85	29

Index

Order code	Type	Page
1SBN010015R1001	CE5-01D0.1	66
1SBN010015R1010	CE5-10D0.1	66
1SBN010016R1001	CE5-01W0.1	66
1SBN010016R1010	CE5-10W0.1	66
1SBN010017R1001	CE5-01D2	66
1SBN010017R1010	CE5-10D2	66
1SBN010018R1001	CE5-01W2	66
1SBN010018R1010	CE5-10W2	66
1SBN019010R1001	CA5X-01	35, 64
1SBN019010R1010	CA5X-10	35, 64
1SBN019020R1011	CAL5X-11	35, 64
1SBN019040R1022	CA5X-22E	35, 64
1SBN019040R1122	CA5X-22M	35, 64
1SBN020312R1000	TEF5-ON	36, 69
1SBN020314R1000	TEF5-OFF	36, 69
1SBN030100R1000	VM5-1	35, 72
1SBN030110R1000	VE5-1	35, 72
1SBN030210R1000	VE5-2	35, 72
1SBN050010R1000	RV5/50	36, 78
1SBN050010R1001	RV5/133	36, 78
1SBN050010R1002	RV5/250	36, 78
1SBN050010R1003	RV5/440	36, 78
1SBN050100R1000	RC5-1/50	36, 78
1SBN050100R1001	RC5-1/133	36, 78
1SBN050100R1002	RC5-1/250	36, 78
1SBN050100R1003	RC5-1/440	36, 78
1SBN050200R1000	RC5-2/50	36, 78
1SBN050200R1001	RC5-2/133	36, 78
1SBN050200R1002	RC5-2/250	36, 78
1SBN050200R1003	RC5-2/440	36, 78
1SBN060300R1000	RA5-1	74
1SBN073508R1000	LD75	80
1SBN073552R1002	LK75-F	81
1SBN081406R1000	BEA16/116	36, 83
1SBN081411R1000	BER16V	83
1SBN082411R1000	BER40V	83
1SBN083501R1000	BEM75-30	83
1SBN083504R1000	BES75-30	84
1SBN110000R1000	BA5-50	81
1SBN060300T1000	RA5-1	74
1SBN089306T1000	BEA25/116	36, 83
1SBN089306T1001	BEA25/132	36, 83
1SCA101647R1001	OXS6X85	25
1SCA101655R1001	OXS6X130	25
1SCA101659R1001	OXS6X180	25
1SCA108043R1001	OXS6X105	25
1SFA616162R1014	KPR-101L	93, 94
1SFL431074R2611	AX95-30-11-26	33
1SFL431074R7511	AX95-30-11-75	33
1SFL431074R8111	AX95-30-11-81	33
1SFL431074R8511	AX95-30-11-85	33
1SFL981074R2611	AX115-30-11-26	33
1SFL981074R7511	AX115-30-11-75	33
1SFL981074R8111	AX115-30-11-81	33
1SFL981074R8511	AX115-30-11-85	33
1SFL991074R2611	AX150-30-11-26	33
1SFL991074R7511	AX150-30-11-75	33
1SFL991074R8111	AX150-30-11-81	33
1SFL991074R8511	AX150-30-11-85	33
1SFN019820R1011	CAL18X-11	35, 64
1SFN034701R1000	VM300V	72
1SFN074308R1000	LD110	80
1SFN084301R1000	BEM110-30	83
1SFN084304R1000	BES110	84
1SFN084503R1000	BED110	84
1SVR730100R0300	CT-ERS.21S	52
1SVR730210R3300	CT-SDS.22S	52
1SVR730211R2300	CT-SDS.23S	52
FPEP407000R0001	LP16	82
FPEP407002R0001	LY16	82
FPTN372726R1001	WB75-A	36, 76
FPTN372726R1002	WB75-A	76
FPTN372726R1003	WB75-A	76
FPTN372726R1004	WB75-A	76
FPTN372726R1005	WB75-A	76
FPTN372726R1006	WB75-A	36, 76
FPTN372726R1007	WB75-A	76
FPTN372726R1008	WB75-A	76
GJF1101903R0001	SA1	22
GJF1101903R0002	SA2	22
GJF1101903R0003	SA3	22

Order code	Type	Page

Index

Type	Order code	Page
AA1-110	1SAM201910R1002	19
AA1-230	1SAM201910R1003	19
AA1-24	1SAM201910R1001	19
AA1-400	1SAM201910R1004	19
AX09-30-01-26	1SBL901074R2601	28
AX09-30-01-75	1SBL901074R7501	28
AX09-30-01-81	1SBL901074R8101	28
AX09-30-01-85	1SBL901074R8501	28
AX09-30-10-26	1SBL901074R2610	28
AX09-30-10-75	1SBL901074R7510	28
AX09-30-10-81	1SBL901074R8110	28
AX09-30-10-85	1SBL901074R8510	28
AX115-30-11-26	1SFL981074R2611	33
AX115-30-11-75	1SFL981074R7511	33
AX115-30-11-81	1SFL981074R8111	33
AX115-30-11-85	1SFL981074R8511	33
AX12-30-01-26	1SBL911074R2601	28
AX12-30-01-75	1SBL911074R7501	28
AX12-30-01-81	1SBL911074R8101	28
AX12-30-01-85	1SBL911074R8501	28
AX12-30-10-26	1SBL911074R2610	28
AX12-30-10-75	1SBL911074R7510	28
AX12-30-10-81	1SBL911074R8110	28
AX12-30-10-85	1SBL911074R8510	28
AX150-30-11-26	1SFL991074R2611	33
AX150-30-11-75	1SFL991074R7511	33
AX150-30-11-81	1SFL991074R8111	33
AX150-30-11-85	1SFL991074R8511	33
AX18-30-01-26	1SBL921074R2601	29
AX18-30-01-75	1SBL921074R7501	29
AX18-30-01-81	1SBL921074R8101	29
AX18-30-01-85	1SBL921074R8501	29
AX18-30-10-26	1SBL921074R2610	29
AX18-30-10-75	1SBL921074R7510	29
AX18-30-10-81	1SBL921074R8110	29
AX18-30-10-85	1SBL921074R8510	29
AX25-30-01-26	1SBL931074R2601	29
AX25-30-01-75	1SBL931074R7501	29
AX25-30-01-81	1SBL931074R8101	29
AX25-30-01-85	1SBL931074R8501	29
AX25-30-10-26	1SBL931074R2610	29
AX25-30-10-75	1SBL931074R7510	29
AX25-30-10-81	1SBL931074R8110	29
AX25-30-10-85	1SBL931074R8510	29
AX32-30-01-26	1SBL281074R2601	30
AX32-30-01-75	1SBL281074R7501	30
AX32-30-01-81	1SBL281074R8101	30
AX32-30-01-85	1SBL281074R8501	30
AX32-30-10-26	1SBL281074R2610	30
AX32-30-10-75	1SBL281074R7510	30
AX32-30-10-81	1SBL281074R8110	30
AX32-30-10-85	1SBL281074R8510	30
AX40-30-01-26	1SBL321074R2601	30
AX40-30-01-75	1SBL321074R7501	30
AX40-30-01-81	1SBL321074R8101	30
AX40-30-01-85	1SBL321074R8501	30
AX40-30-10-26	1SBL321074R2610	30
AX40-30-10-75	1SBL321074R7510	30
AX40-30-10-81	1SBL321074R8110	30
AX40-30-10-85	1SBL321074R8510	30
AX50-30-00-26	1SBL351074R2600	31
AX50-30-00-75	1SBL351074R7500	31
AX50-30-00-81	1SBL351074R8100	31
AX50-30-00-85	1SBL351074R8500	31
AX50-30-11-26	1SBL351074R2611	32
AX50-30-11-75	1SBL351074R7511	32
AX50-30-11-81	1SBL351074R8111	32
AX50-30-11-85	1SBL351074R8511	32
AX65-30-00-26	1SBL371074R2600	31
AX65-30-00-75	1SBL371074R7500	31
AX65-30-00-81	1SBL371074R8100	31
AX65-30-00-85	1SBL371074R8500	31
AX65-30-11-26	1SBL371074R2611	32
AX65-30-11-75	1SBL371074R7511	32
AX65-30-11-81	1SBL371074R8111	32
AX65-30-11-85	1SBL371074R8511	32
AX80-30-00-26	1SBL411074R2600	31
AX80-30-00-75	1SBL411074R7500	31
AX80-30-00-81	1SBL411074R8100	31
AX80-30-00-85	1SBL411074R8500	31
AX80-30-11-26	1SBL411074R2611	32
AX80-30-11-75	1SBL411074R7511	32
AX80-30-11-81	1SBL411074R8111	32
AX80-30-11-85	1SBL411074R8511	32
AX95-30-11-26	1SFL431074R2611	33
AX95-30-11-75	1SFL431074R7511	33
AX95-30-11-81	1SFL431074R8111	33
AX95-30-11-85	1SFL431074R8511	33
BA5-50	1SBN110000R1000	81
BEA16/116	1SBN081406R1000	36, 83
BEA25/116	1SBN089306T1000	36, 83
BEA25/132	1SBN089306T1001	36, 83
BED110	1SFN084503R1000	84
BEM110-30	1SFN084301R1000	83
BEM75-30	1SBN083501R1000	83
BER16V	1SBN081411R1000	83
BER40V	1SBN082411R1000	83
BES110	1SFN084304R1000	84
BES75-30	1SBN083504R1000	84
BS1-3	1SAM201908R1001	22
CA5X-01	1SBN019010R1001	35, 64
CA5X-10	1SBN019010R1010	35, 64
CA5X-22E	1SBN019040R1022	35, 64
CA5X-22M	1SBN019040R1122	35, 64
CAL18X-11	1SFN019820R1011	35, 64
CAL5X-11	1SBN019020R1011	35, 64
CE5-01D0.1	1SBN010015R1001	66
CE5-01D2	1SBN010017R1001	66
CE5-01W0.1	1SBN010016R1001	66
CE5-01W2	1SBN010018R1001	66
CE5-10D0.1	1SBN010015R1010	66
CE5-10D2	1SBN010017R1010	66
CE5-10W0.1	1SBN010016R1010	66
CE5-10W2	1SBN010018R1010	66
CT-ERS.21S	1SVR730100R0300	52
CT-SDS.22S	1SVR730210R3300	52
CT-SDS.23S	1SVR730211R2300	52
DB200	1SAZ401110R0001	94
DB25/25A	1SAZ201108R0001	93
DB25/32A	1SAZ201108R0002	93
DB80	1SAZ301110R0001	93, 94
DMS132-G	1SAM201912R1010	24
DMS132-Y	1SAM201912R1011	24
DX25	1SAZ201307R0002	93
FS116	1SAM201909R1001	22
HK1-02	1SAM201902R1003	18
HK1-11	1SAM201902R1001	18
HK1-20	1SAM201902R1002	18
HK1-20L	1SAM201902R1004	18
HKF1-01	1SAM201901R1004	18
HKF1-10	1SAM201901R1003	18
HKF1-11	1SAM201901R1001	18
HKF1-20	1SAM201901R1002	18
IB132-G	1SAM201911R1010	24
IB132-Y	1SAM201911R1011	24
KPR-101L	1SFA616162R1014	93, 94
LD110	1SFN074308R1000	80
LD75	1SBN073508R1000	80
LK75-F	1SBN073552R1002	81
LP16	FPEP407000R0001	82
LY16	FPEP407002R0001	82
MS116-0.16	1SAM250000R1001	13
MS116-0.16-HKF1-11	1SAM250005R1001	13
MS116-0.25	1SAM250000R1002	13
MS116-0.25-HKF1-11	1SAM250005R1002	13
MS116-0.4	1SAM250000R1003	13
MS116-0.4-HKF1-11	1SAM250005R1003	13
MS116-0.63	1SAM250000R1004	13
MS116-0.63-HKF1-11	1SAM250005R1004	13
MS116-1.0	1SAM250000R1005	13
MS116-1.0-HKF1-11	1SAM250005R1005	13
MS116-1.6	1SAM250000R1006	13
MS116-1.6-HKF1-11	1SAM250005R1006	13
MS116-10	1SAM250000R1010	13
MS116-10.0-HKF1-11	1SAM250005R1010	13
MS116-12	1SAM250000R1012	13
MS116-12.0-HKF1-11	1SAM250005R1012	13
MS116-16	1SAM250000R1011	13
MS116-16.0-HKF1-11	1SAM250005R1011	13
MS116-2.5	1SAM250000R1007	13
MS116-2.5-HKF1-11	1SAM250005R1007	13
MS116-20	1SAM250000R1013	13
MS116-20-HKF1-11	1SAM250005R1013	13
MS116-25	1SAM250000R1014	13
MS116-25-HKF1-11	1SAM250005R1014	13
MS116-32	1SAM250000R1015	13
MS116-32-HKF1-11	1SAM250005R1015	13
MS116-4.0	1SAM250000R1008	13
MS116-4.0-HKF1-11	1SAM250005R1008	13
MS116-6.3	1SAM250000R1009	13
MS116-6.3-HKF1-11	1SAM250005R1009	13
MSAH1	1SAM201909R1021	25
MSH-AR	1SAM201920R1000	25
MSHD-LB (1)	1SAM201920R1001	25
MSHD-LTB (2)	1SAM201920R1011	25
MSHD-LTY(2)	1SAM201920R1012	25
MSHD-LY (1)	1SAM201920R1002	25
MSMN (3)	1SAM101923R0002	25
MSMNO (4)	1SAM101923R0012	25
NX22E-26	1SBH901074R2622	58
NX22E-75	1SBH901074R7522	58
NX22E-81	1SBH901074R8122	58
NX22E-85	1SBH901074R8522	58
NX31E-26	1SBH901074R2631	58
NX31E-75	1SBH901074R7531	58
NX31E-81	1SBH901074R8131	58
NX31E-85	1SBH901074R8531	58
NX40E-26	1SBH901074R2640	58
NX40E-75	1SBH901074R7540	58
NX40E-81	1SBH901074R8140	58
NX40E-85	1SBH901074R8540	58
OXS6X105	1SCA108043R1001	25
OXS6X130	1SCA101655R1001	25
OXS6X180	1SCA101659R1001	25
OXS6X85	1SCA101647R1001	25
PB1-1-32	1SAM201914R1001	22
PS1-2-0-65	1SAM201906R1102	22
PS1-2-1-65	1SAM201906R1112	22
PS1-2-2-65	1SAM201906R1122	22
PS1-3-0-100	1SAM201916R1103	22
PS1-3-0-65	1SAM201906R1103	22
PS1-3-1-100	1SAM201916R1113	22
PS1-3-1-65	1SAM201906R1113	22
PS1-3-2-100	1SAM201916R1123	22
PS1-3-2-65	1SAM201906R1123	22
PS1-4-0-100	1SAM201916R1104	22
PS1-4-0-65	1SAM201906R1104	22
PS1-4-1-100	1SAM201916R1114	22
PS1-4-1-65	1SAM201906R1114	22
PS1-4-2-65	1SAM201906R1124	22
PS1-5-0-100	1SAM201916R1105	22
PS1-5-0-65	1SAM201906R1105	22
PS1-5-1-100	1SAM201916R1115	22
PS1-5-1-65	1SAM201906R1115	22
PS1-5-2-65	1SAM201906R1125	22
RA5-1	1SBN060300R1000	74

Index

Type	Order code	Page
RA5-1	1SBN060300T1000	74
RC5-1/133	1SBN050100R1001	36, 78
RC5-1/250	1SBN050100R1002	36, 78
RC5-1/440	1SBN050100R1003	36, 78
RC5-1/50	1SBN050100R1000	36, 78
RC5-2/133	1SBN050200R1001	36, 78
RC5-2/250	1SBN050200R1002	36, 78
RC5-2/440	1SBN050200R1003	36, 78
RC5-2/50	1SBN050200R1000	36, 78
RV5/133	1SBN050010R1001	36, 78
RV5/250	1SBN050010R1002	36, 78
RV5/440	1SBN050010R1003	36, 78
RV5/50	1SBN050010R1000	36, 78
S1-M1-25	1SAM201907R1101	22
S1-M2-25	1SAM201907R1102	22
S1-M3-25	1SAM201907R1103	22
S1-M3-35	1SAM201913R1103	22
S1-PB1-25	1SAM201914R1002	22
SA1	GJF1101903R0001	22
SA2	GJF1101903R0002	22
SA3	GJF1101903R0003	22
SK1-02	1SAM201903R1003	18
SK1-11	1SAM201903R1001	18
SK1-20	1SAM201903R1002	18
TA110DU-110M	1SAZ411201R2002	94
TA110DU-90M	1SAZ411201R2001	94
TA25DU-0.16M	1SAZ211201R2005	89
TA25DU-0.25M	1SAZ211201R2009	89
TA25DU-0.4M	1SAZ211201R2013	89
TA25DU-0.63M	1SAZ211201R2017	89
TA25DU-1.0M	1SAZ211201R2021	89
TA25DU-1.4M	1SAZ211201R2023	89
TA25DU-1.8M	1SAZ211201R2025	89
TA25DU-11M	1SAZ211201R2043	89
TA25DU-14M	1SAZ211201R2045	89
TA25DU-19M	1SAZ211201R2047	89
TA25DU-2.4M	1SAZ211201R2028	89
TA25DU-25M	1SAZ211201R2051	89
TA25DU-3.1M	1SAZ211201R2031	89
TA25DU-32M	1SAZ211201R2053	89
TA25DU-4.0M	1SAZ211201R2033	89
TA25DU-5.0M	1SAZ211201R2035	89
TA25DU-6.5M	1SAZ211201R2038	89
TA25DU-8.5M	1SAZ211201R2040	89
TA42DU-25M	1SAZ311201R2001	89
TA42DU-32M	1SAZ311201R2002	89
TA42DU-42M	1SAZ311201R2003	89
TA75DU-25M	1SAZ321201R2001	89
TA75DU-32M	1SAZ321201R2002	89
TA75DU-42M	1SAZ321201R2003	89
TA75DU-52M	1SAZ321201R2004	89
TA75DU-63M	1SAZ321201R2005	89
TA75DU-80M	1SAZ321201R2006	89
TA80DU-42M	1SAZ331201R2003	94
TA80DU-52M	1SAZ331201R2004	94
TA80DU-63M	1SAZ331201R2005	94
TA80DU-80M	1SAZ331201R2006	94
TEF5-OFF	1SBN020314R1000	36, 69
TEF5-ON	1SBN020312R1000	36, 69
UA1-110	1SAM201904R1004	19
UA1-20	1SAM201904R1010	19
UA1-208	1SAM201904R1008	19
UA1-230	1SAM201904R1005	19
UA1-24	1SAM201904R1001	19
UA1-400	1SAM201904R1006	19
UA1-415	1SAM201904R1007	19
UA1-48	1SAM201904R1002	19
UA1-575	1SAM201904R1009	19
UA1-60	1SAM201904R1003	19
VE5-1	1SBN030110R1000	35, 72
VE5-2	1SBN030210R1000	35, 72
VM300V	1SFN034701R1000	72
VM5-1	1SBN030100R1000	35, 72
WB75-A	FPTN372726R1001	36, 76
WB75-A	FPTN372726R1002	76
WB75-A	FPTN372726R1003	76
WB75-A	FPTN372726R1004	76
WB75-A	FPTN372726R1005	76
WB75-A	FPTN372726R1006	36, 76
WB75-A	FPTN372726R1007	76
WB75-A	FPTN372726R1008	76

—
ABB France
Electrification Products Division
Low Voltage Products and Systems
3, rue Jean Perrin
F-69687 Chassieu cedex / France

—
ABB STOTZ-KONTAKT GmbH
Electrification Business
Low Voltage Products and Systems
Eppelheimer Straße 82
D-69123 Heidelberg / Germany

You can find the address of your local sales organization on the ABB home page

http://new.abb.com/low-voltage

http://new.abb.com/low-voltage/products/connection-devices

We reserve the right to make technical changes or modify the contents of this document without prior notice.
ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.
We reserve all rights in this document and in the subject matter and illustrations contained therein.
Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2023 ABB - All rights reserved

9AKK108468A1159 - 20.01.2023