OMRON

NJ/NX-series Machine Automation Controller CPU Unit

NX701-1□□□/NX502-□□□□/NX102-□□□□/NJ501-1□00



SYSMAC
always in control

Reliable, secure, easy - International standard communication protocol

Reliable

IEC communication protocol for Industrie 4.0 and PackML

OPC UA is an industrial communication protocol that enables data exchange between products from different manufacturers and across operating systems. This international standard (IEC 62541) is integrated with the IEC 61131-3 PLC programming standard. OPC UA is listed as a recommendation for the communication technology in RAMI 4.0 (Reference Architecture Model Industrie 4.0) and also serves as a basis for the packaging standard PackML (ANSI/ISA-TR88)* and the standard for exchange of data between injection molding machines (EUROMAP 77). The adoption of this open standard for manufacturing machines is increasing worldwide. In such circumstances, Omron added an OPC UA server interface to the NX701-1□□□/NX502-□□□□/NX102-□□□□/NJ501-1□00.





Secure

Authentication and encryption technologies

Security is a crucial issue for connection between industrial automation systems and the host IT system, remote access maintenance, and use of the internet. OPC UA security is based on recognized standards that are also used for secure communication in the internet and satisfies the three security requirements: confidentiality, integrity, and availability. Integrity by digitally signing the messages and confidentiality by encrypting the messages ensure secure connection between automation systems and IT systems.



OPC UA directly connects automation and IT

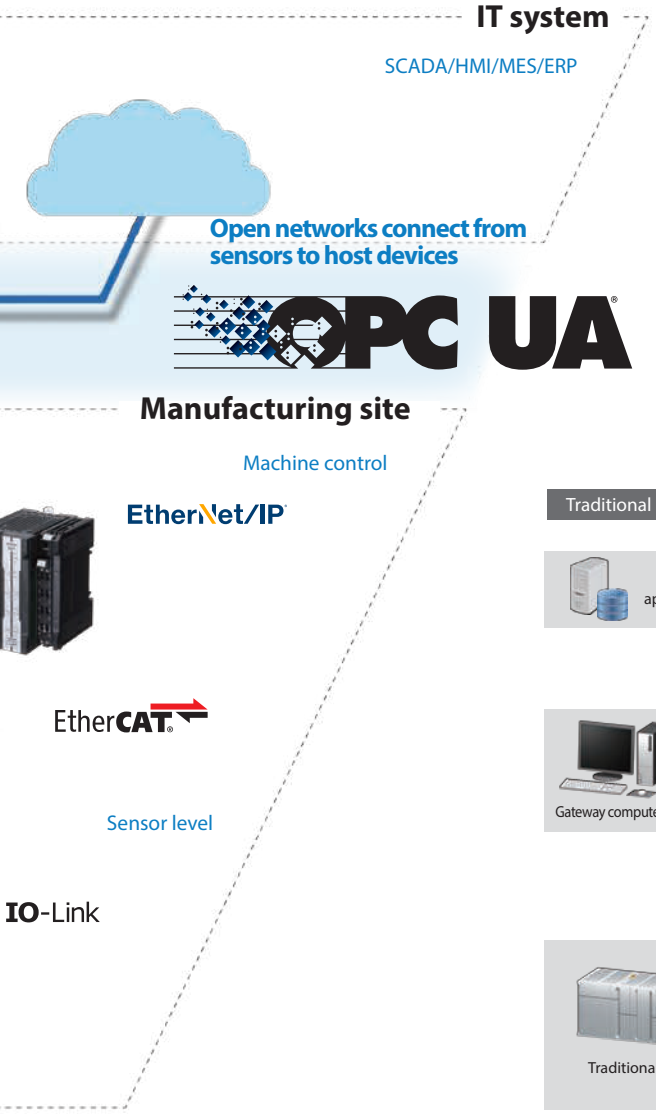

Easy

Simple connection to host system

A gateway computer is required to connect a traditional PLC to the host system. The user must register variables, allocate memory to them, and convert complex data.
Omron's OPC UA CPU Unit eliminates the need for a computer.
Just select variables to directly connect the controller to the host system, without complex data conversion.
In addition, Omron's products support OPC UA companion specifications for IEC 61131-3 and PackML, contributing to facilitating standardization of machines.

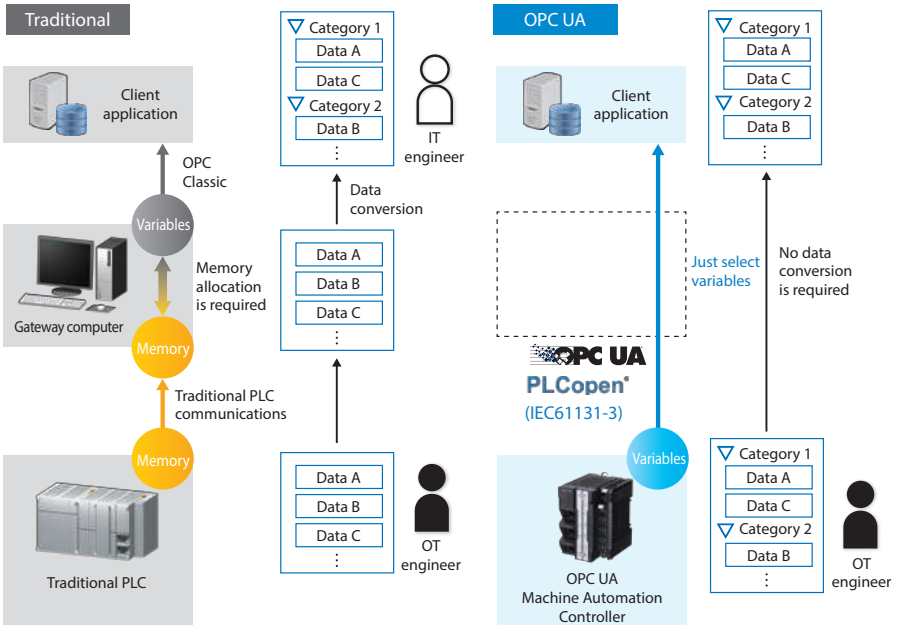

What is OPC UA (OPC Unified Architecture)?

- An interoperability standard for the secure and reliable exchange of data in the industrial automation space and in other industries
- An OS and hardware independent service-oriented architecture
- Secure connection between higher-level systems like MES or ERP and automation systems at production floor

Omron is contributing to the distribution of the OPC technology since OPC Foundation was established.
OPC Foundation https://opcfoundation.org/

＊What is PackML (ANSI/ISA-TR88)?

PackML (Packaging Machine Language) developed by OMAC (Organization for Machine Automation and Control) is a standard for packaging machines that defines mode and state of devices and interface with host devices. In September 2016, it was announced that OMAC, PLCopen and OPC Foundation would work together to promote this standard.
(OPC 30050 - UA Companion Specification for PackML version)
Omron offers the SYSMAC-XR101 OPC UA PackML Library and SYSMAC-XR012 Packaging Machine Library that support the companion specification for PackML and include Function Blocks and sample programs, helping you implement PackML.

Ordering Information

CPU Units

Product name	Specifications			Model
	Program capacity	Memory capacity for variables	Motion control axes	
NX701 CPU Unit 	80 MB	4 MB: Retain attributes 256 MB: No Retain attributes	256	**NX701-1700**
			128	**NX701-1600**
NX701 Database Connection CPU Unit 		4 MB: Retain attributes 256 MB: No Retain attributes (including Memory for CJ-series Units)	256	**NX701-1720**
			128	**NX701-1620**
NX502 CPU Unit 	80 MB	4 MB: Retain attributes 256 MB: No Retain attributes	256	**NX502-1700**
			128	**NX502-1600**
			64	**NX502-1500**
			32	**NX502-1400**
			16	**NX502-1300**
NX102 CPU Unit 	5 MB	1.5 MB: Retain attributes 32 MB: No Retain attributes	8	**NX102-1200**
			4	**NX102-1100**
			2	**NX102-1000**
			0	**NX102-9000**
NX102 Database Connection CPU Unit 			8	**NX102-1220**
			4	**NX102-1120**
			2	**NX102-1020**
			0	**NX102-9020**
NJ501 CPU Unit 	20 MB	2 MB: Retain attributes 4 MB: No Retain attributes	64	**NJ501-1500**
			32	**NJ501-1400**
			16	**NJ501-1300**

Note: 1. Refer to the OMRON website (www.ia.omron.com) or ask your OMRON representative for details.

Collection of software functional components Sysmac Library

Please download it from following URL and install to Sysmac Studio.
https://www.ia.omron.com/sysmac_library/

Product name	Specifications	Model
OPC UA PackML Library	This Library is a collection of software functional objects for using the OPC UA as the communications protocol for PackML in accordance with the OPC UA PackML specifications.	**SYSMAC-XR101**

Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.

OPC, OPC UA, and OPC Certified logo are trademarks of the OPC Foundation.
EtherCAT® is a registered trademark of Beckhoff Automation GmbH for their patented technology.
EtherNet/IP™ and DeviceNet™ are trademarks of ODVA.
Other company names and product names in this document are the trademarks or registered trademarks of there respective companies.

Note: Do not use this document to operate the Unit.

OMRON Corporation **Industrial Automation Company**

Kyoto, JAPAN **Contact : www.ia.omron.com**

Regional Headquarters

OMRON EUROPE B.V.
Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ELECTRONICS LLC
2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.
438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968
Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2017-2024 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_5_3
Cat. No. P123-E1-08 1224 (1217)